

TEST DATA OF NAC-10-□□□

Noise Filter

Apr. 22. 2005

Approved by : Toshio Watanabe Toshio Watanabe
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda
Tadayuki Noda Design Engineer

COSEL CO.,LTD.




CONTENTS


1.Attenuation Characteristics	1
2.Pulse Attenuation Characteristics	4
3.Leakage Current	6
4.Figure of Testing Circuitry	7


(Final Page 8)

coSEL

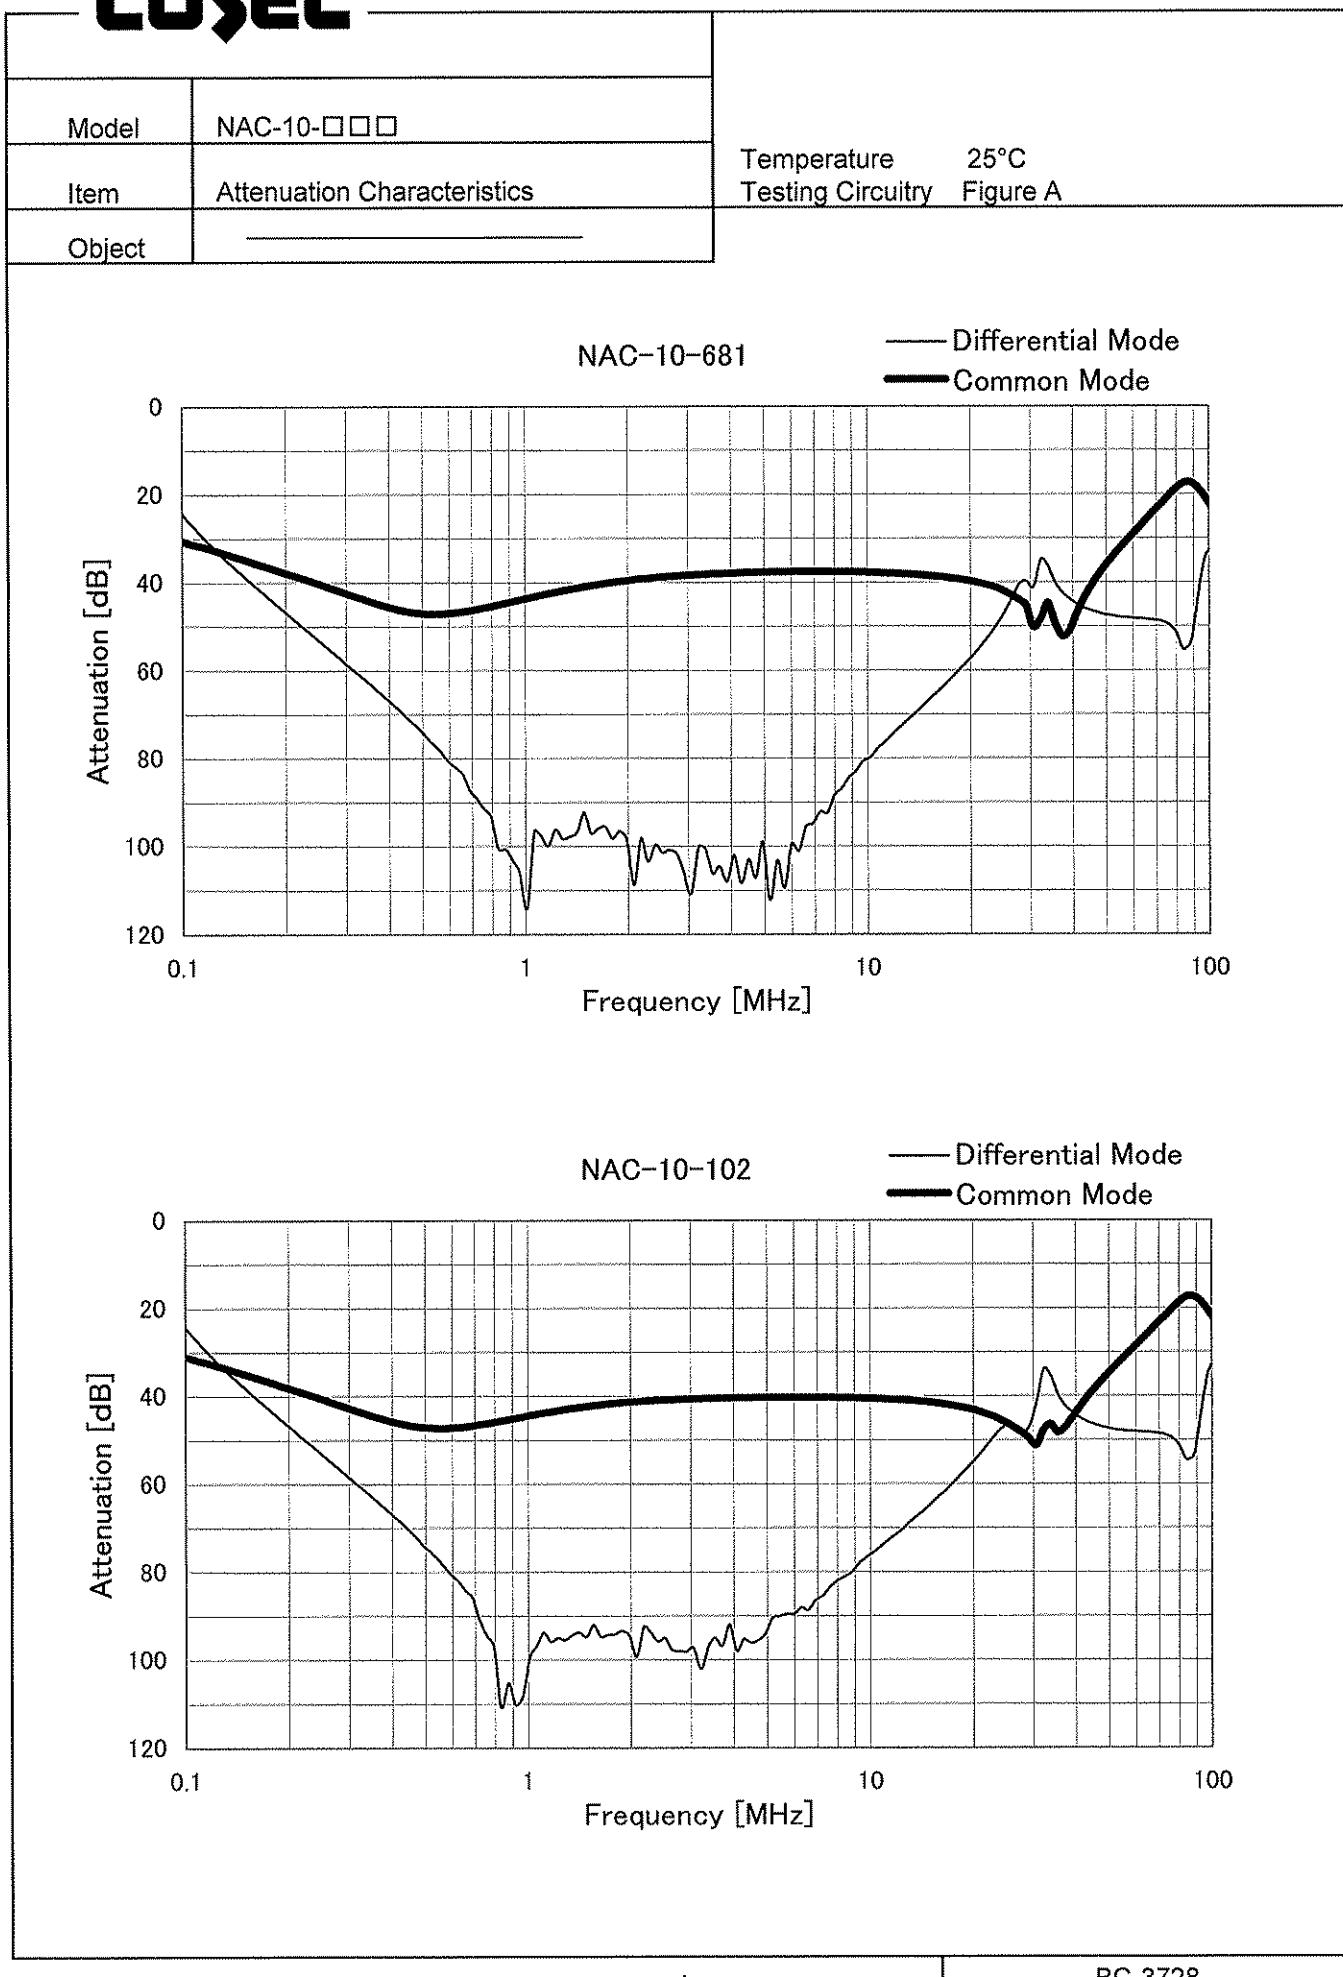





COSEL

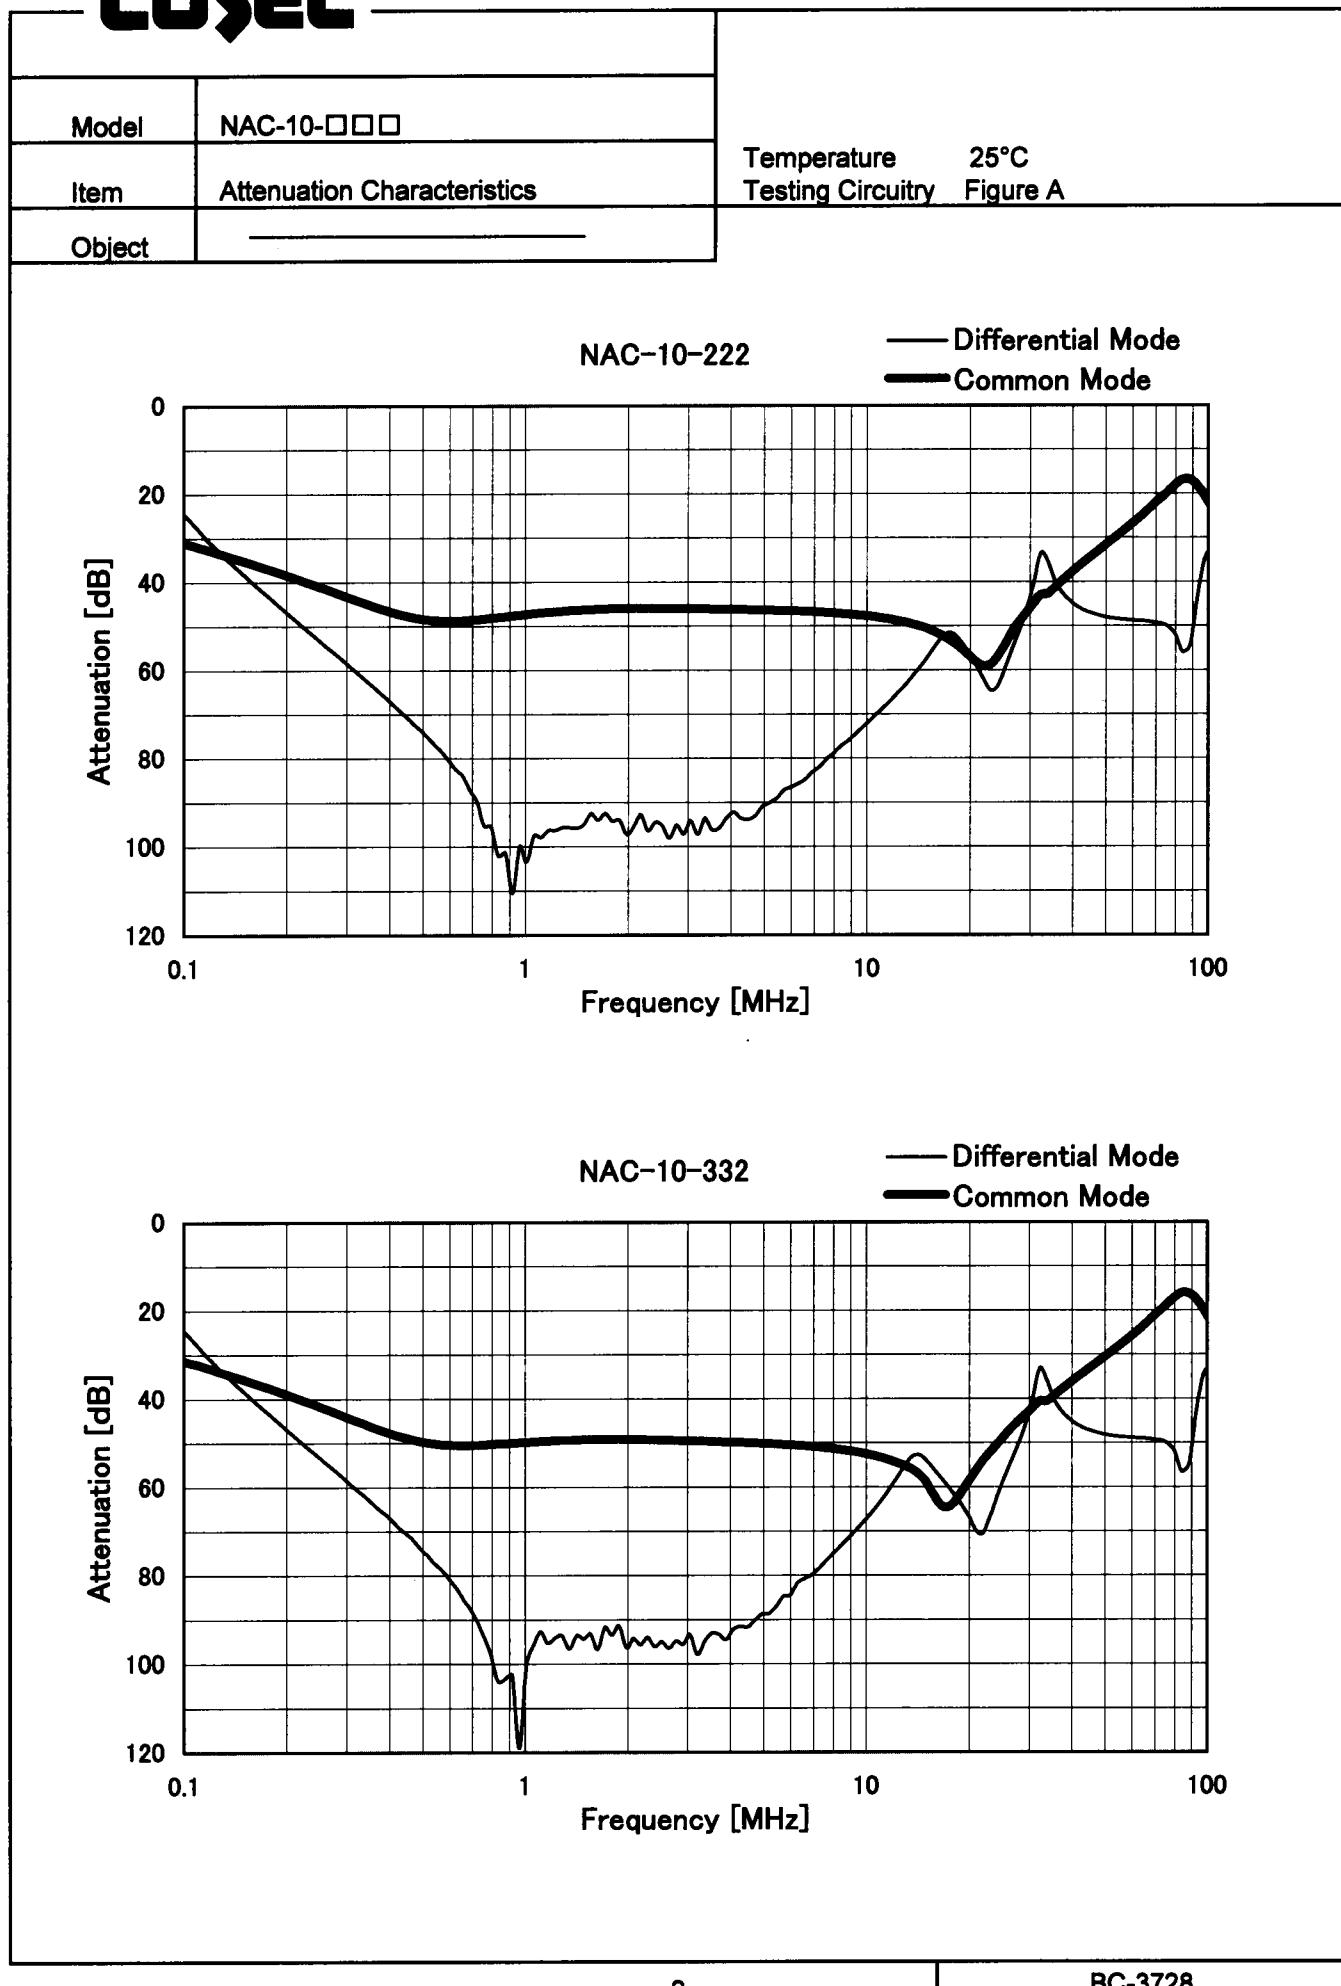

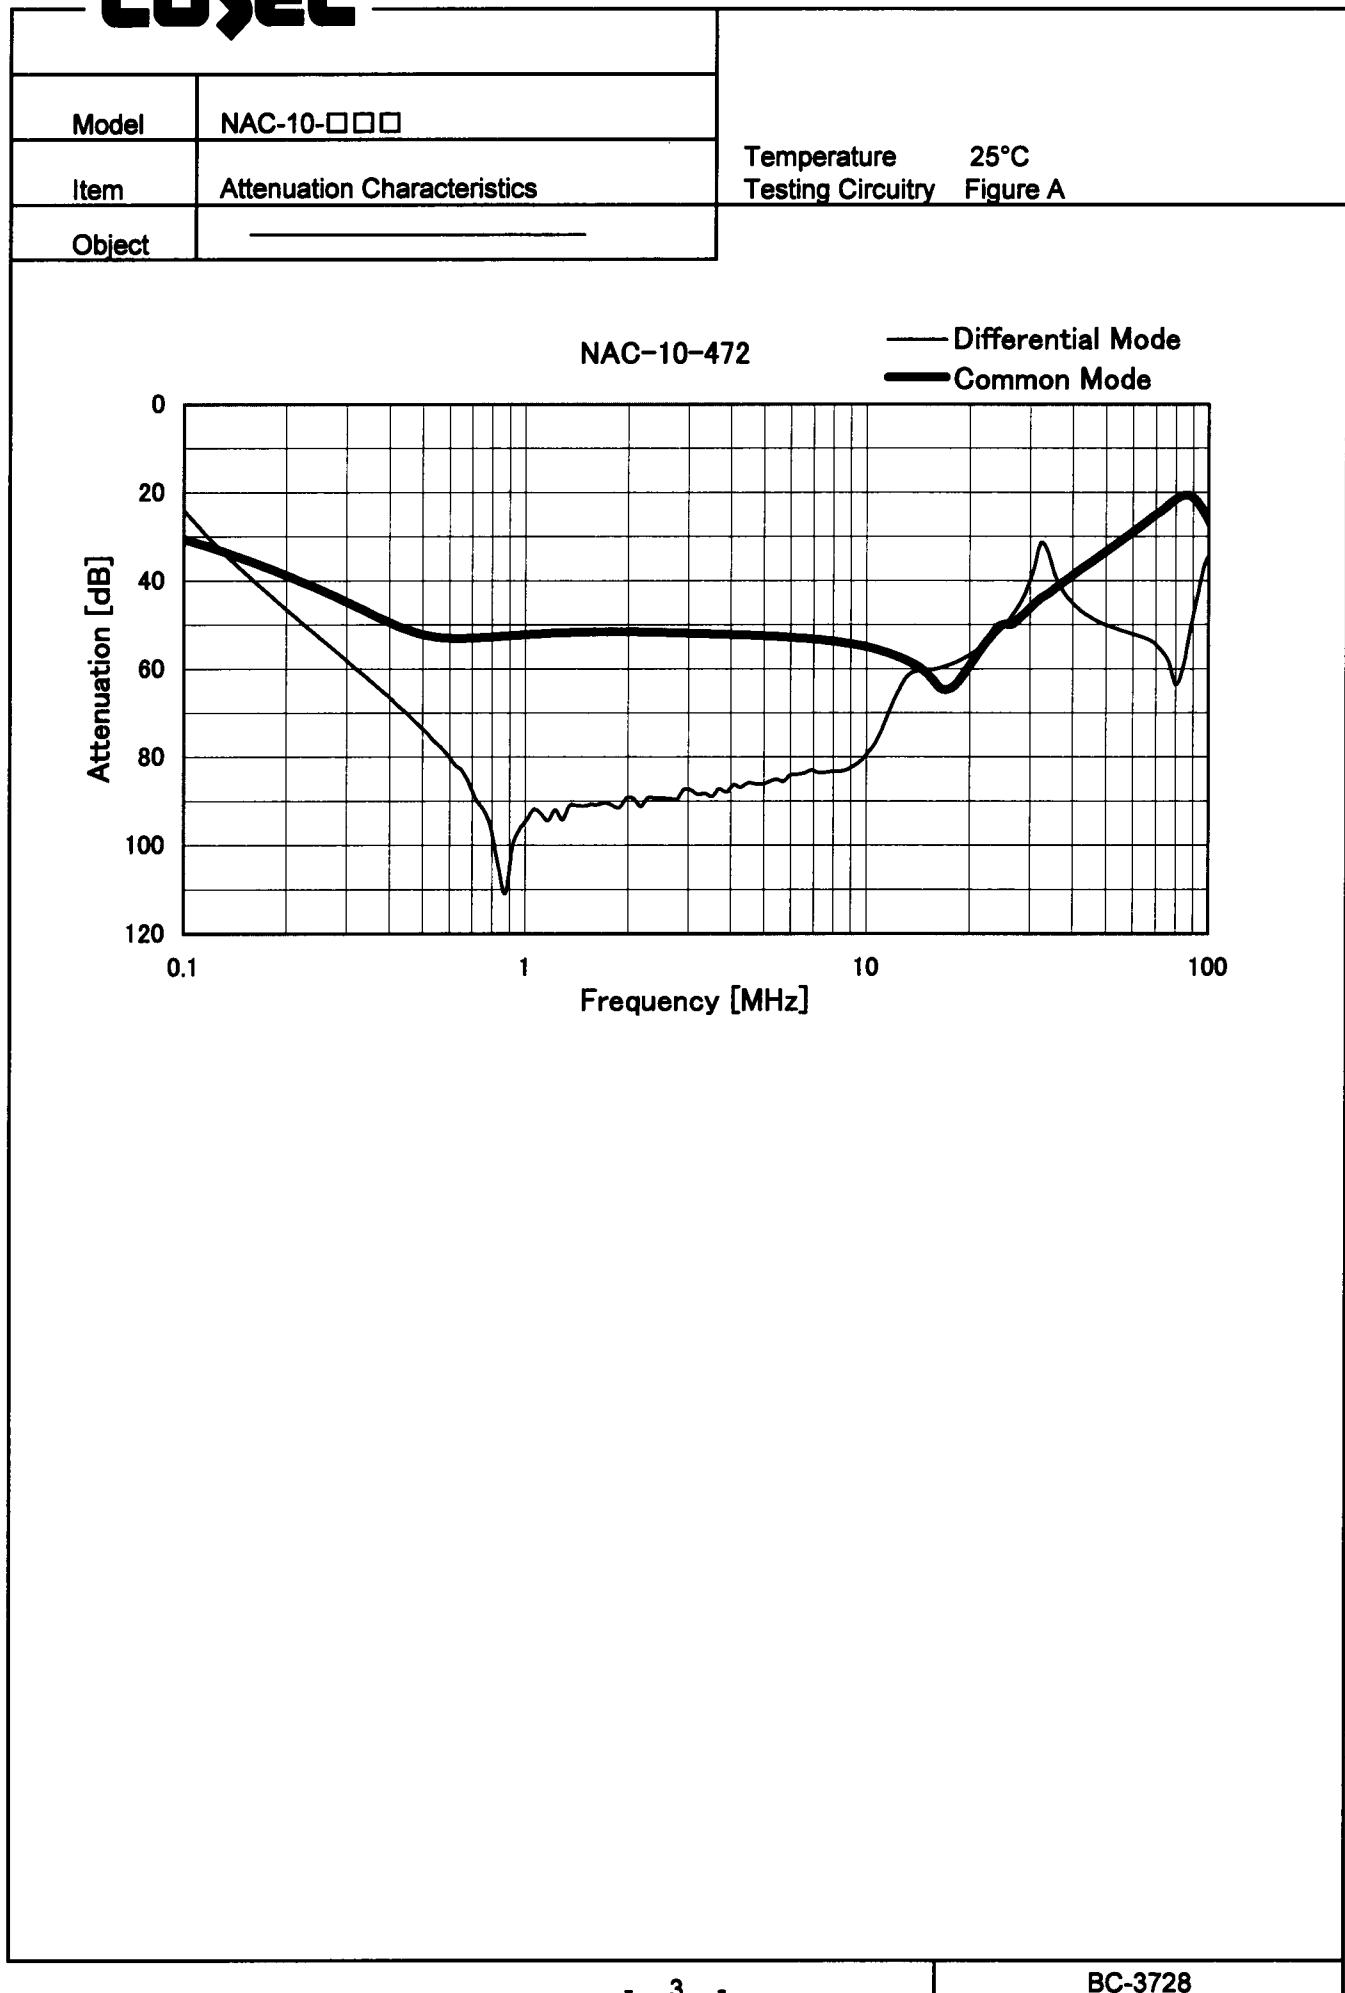coSEL

COSEL

Model	NAC-10-□□□
Item	Pulse Attenuation Characteristics
Object	_____

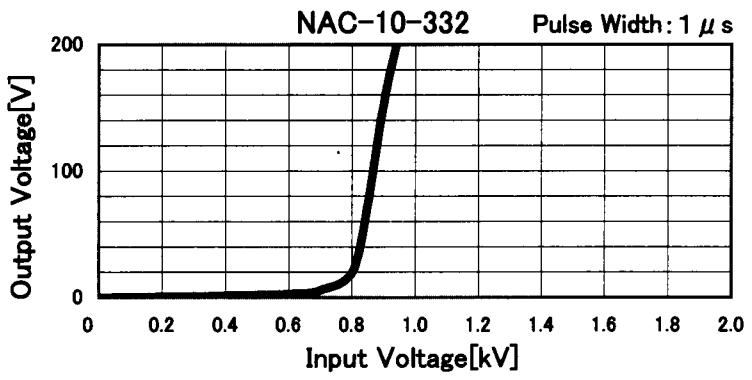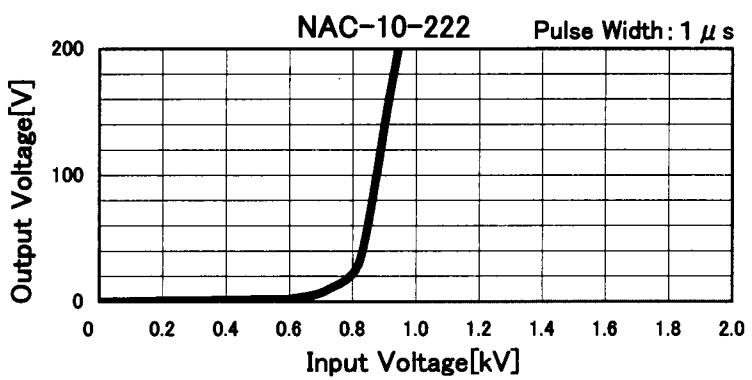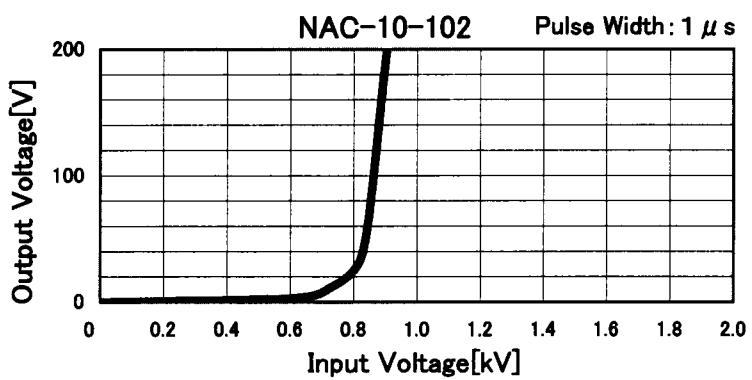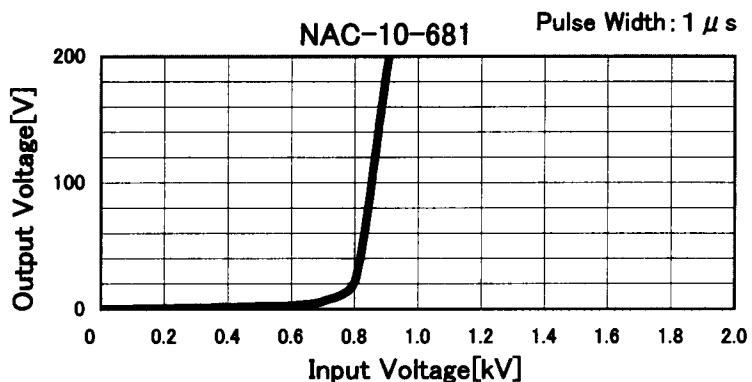Temperature 25°C
Testing Circuitry Figure B


COSEL

Model NAC-10-□□□

Temperature 25°C
Testing Circuitry Figure B

Item Pulse Attenuation Characteristics

Object _____

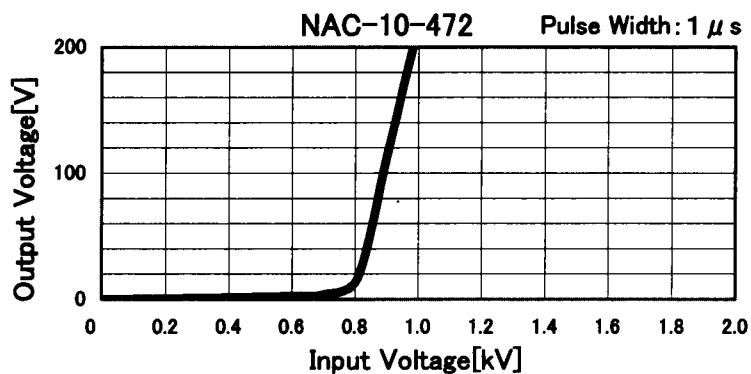



Model	NAC-10-□□□	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure C
Object	_____		

1. Results

[mA]

Model	Standards	Input Volt.				Note
		100 [V]	125 [V]	230 [V]	250 [V]	
NAC-10-681	UL1283	0.031	0.040	0.082	0.093	
NAC-10-102	UL1283	0.044	0.056	0.110	0.120	
NAC-10-222	UL1283	0.090	0.120	0.230	0.250	
NAC-10-332	UL1283	0.130	0.170	0.340	0.370	
NAC-10-472	UL1283	0.190	0.240	0.480	0.520	

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

coSEL

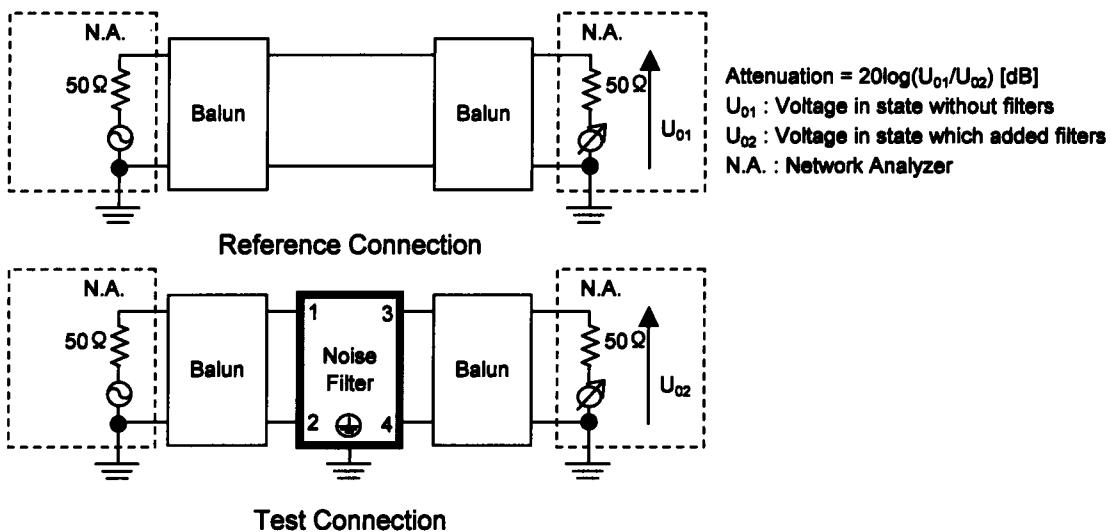


Figure A - 1 Differential mode attenuation measurement

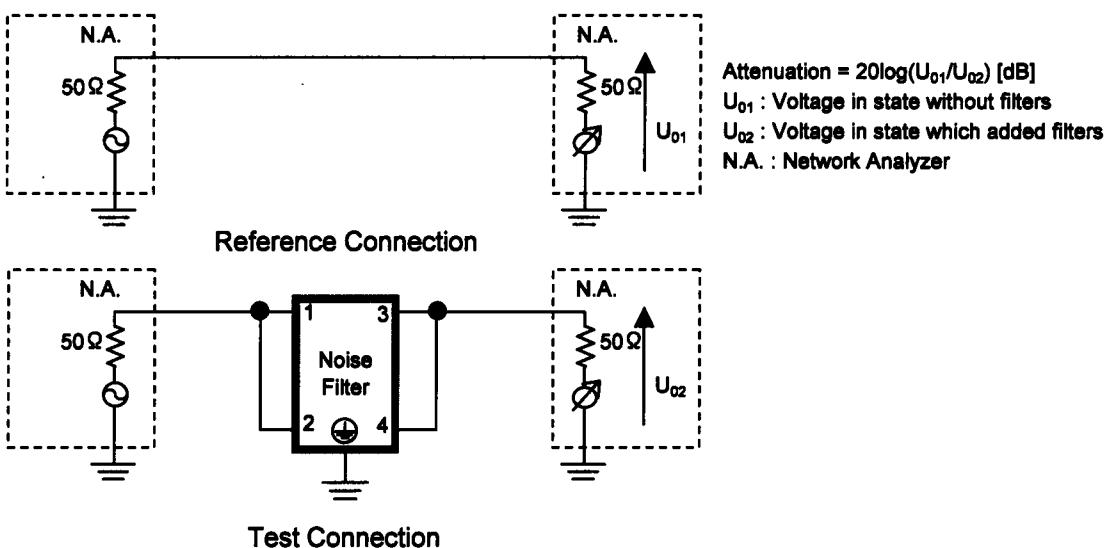


Figure A - 2 Common mode attenuation measurement

COSEL

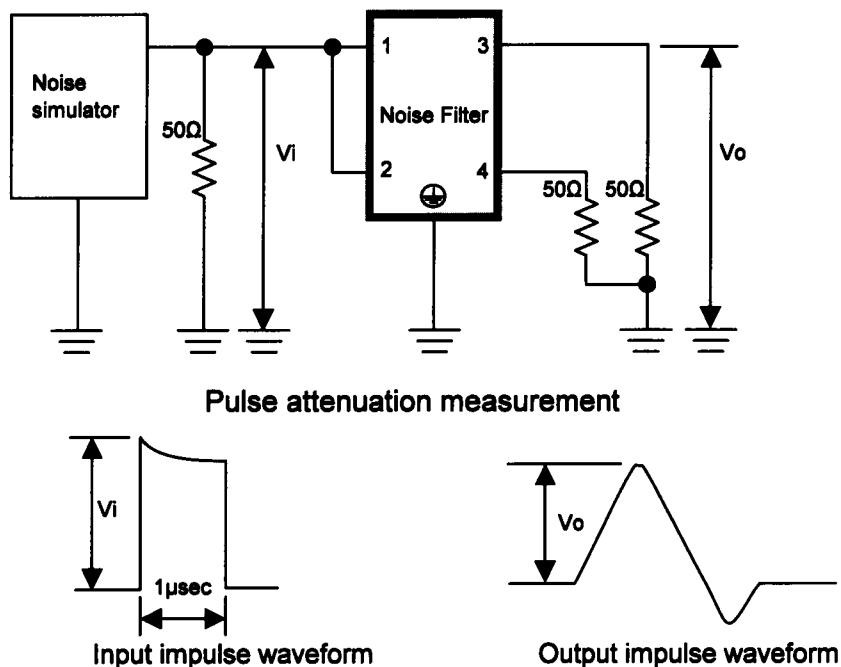


Figure B Pulse attenuation measurement

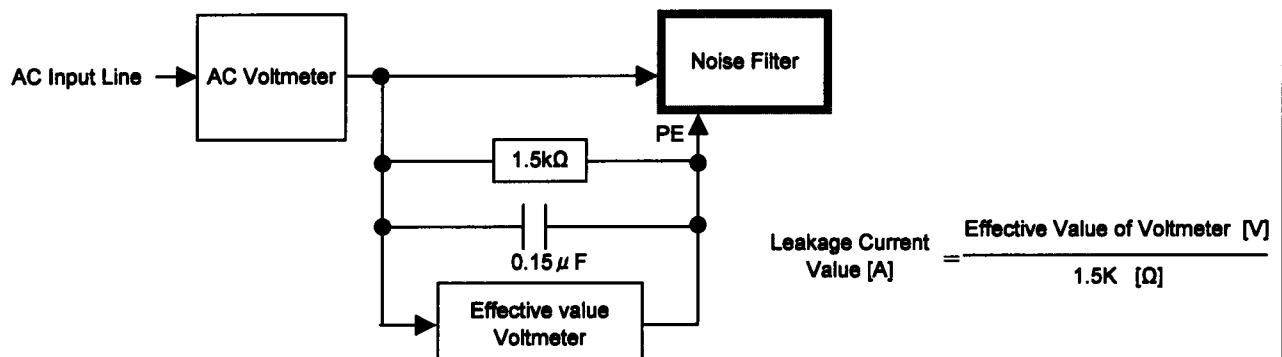


Figure C Leakage current measurement (UL1283)