



TEST DATA OF NAC-40-□□□-F

Noise Filter

Aug. 02 , 2021

Approved by : Tadayuki Noda
Design Manager

Prepared by : Naoya Kunishima
Design Engineer



COSEL CO.,LTD.

CONTENTS

1. Attenuation Characteristics	1
2. Pulse Attenuation Characteristics	3
3. Leakage Current	4
4. Figure of Testing Circuitry	5
(Final Page 6)	




Model	NAC-40-□□□-F	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object			

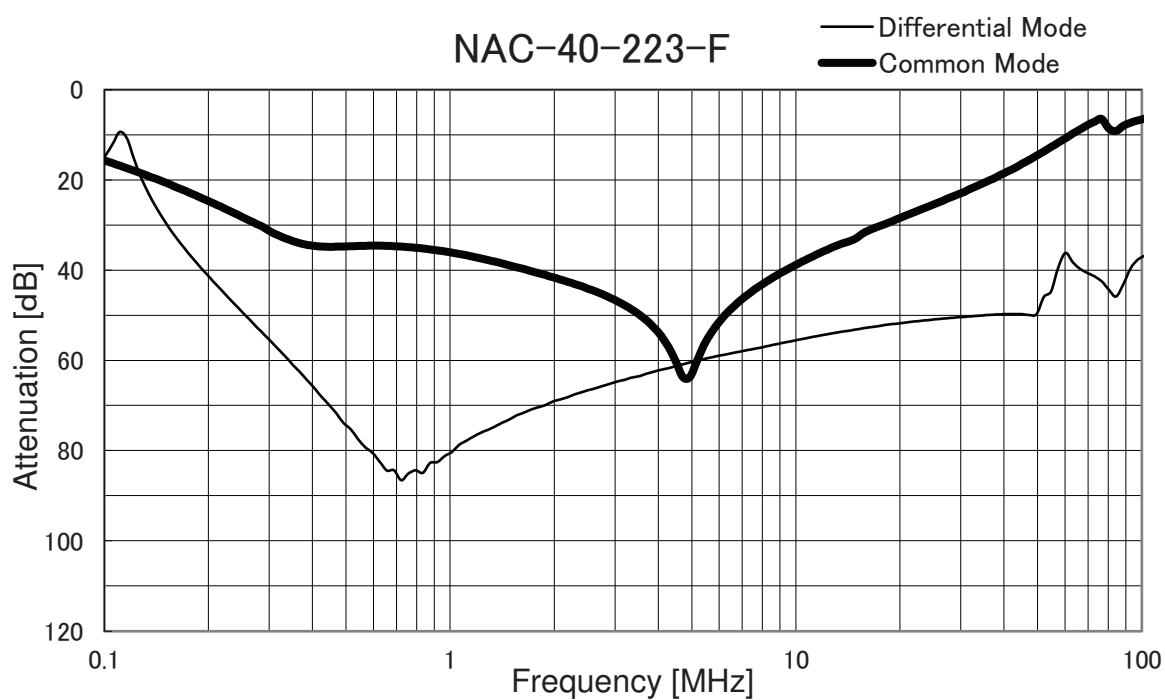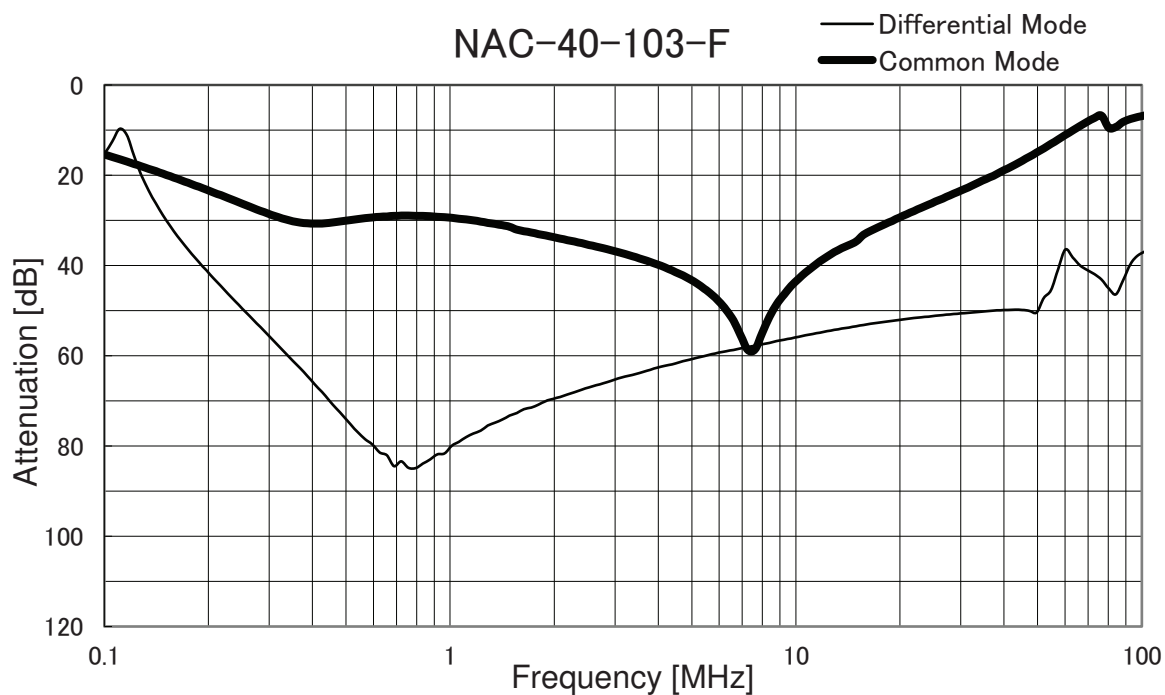






Model	NAC-40-□□□-F	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object			

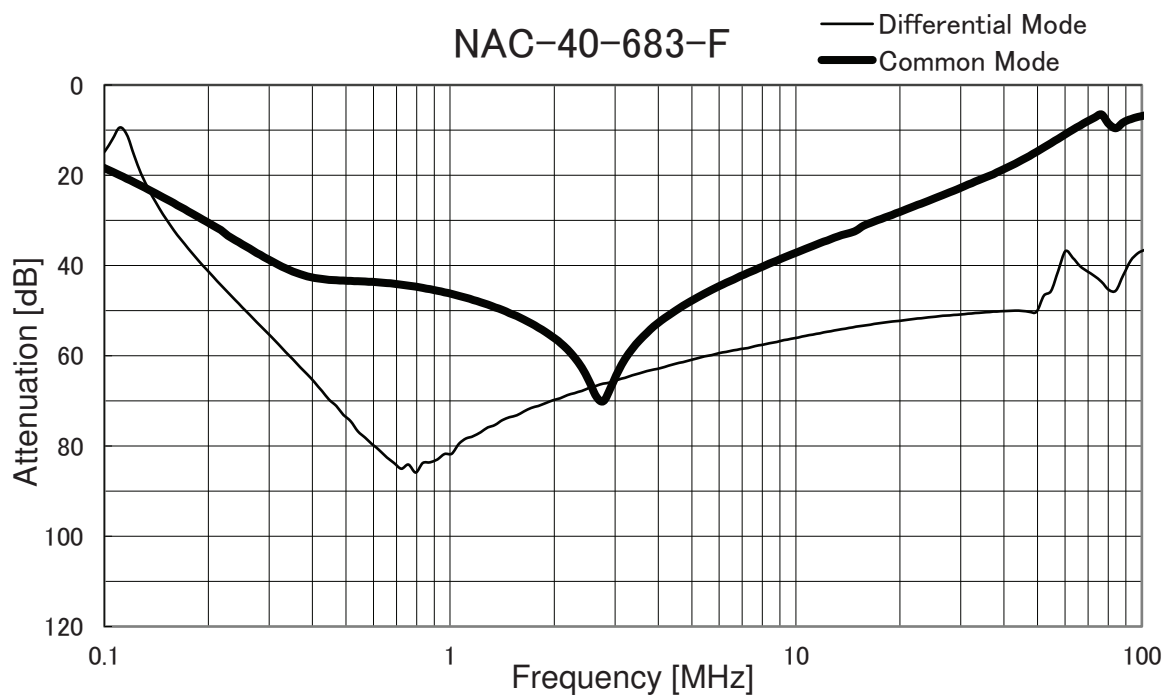



Model		NAC-40-□□□-F	
Item		Pulse Attenuation Characteristics	
Object		Temperature 25°C Testing Circuitry Figure B	

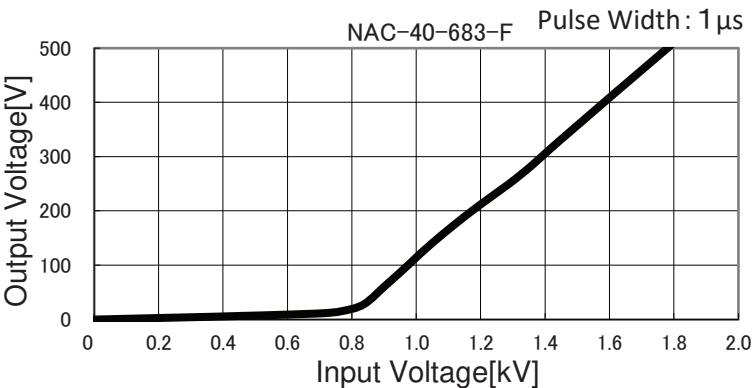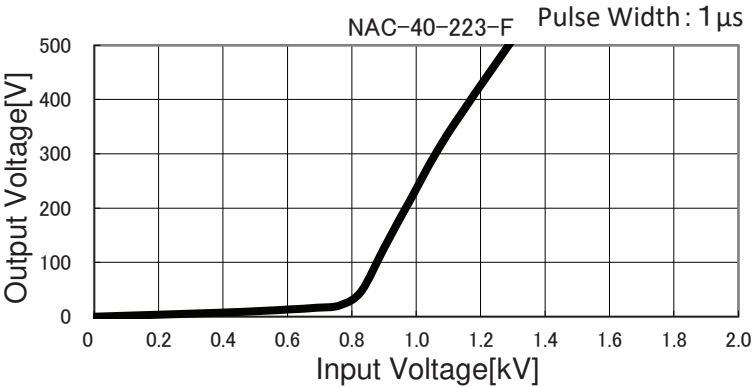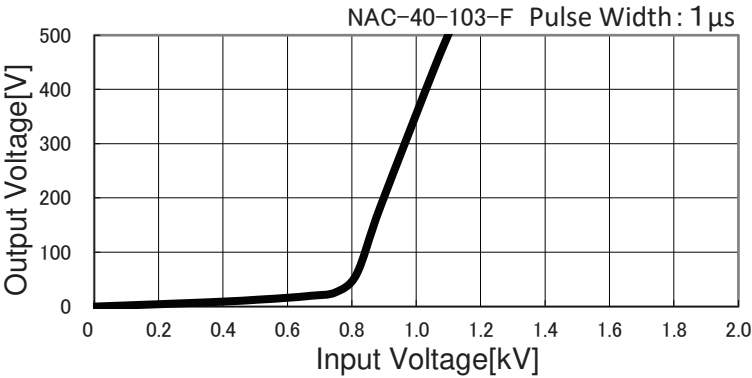



Model		NAC-40-□□□-F	Temperature 25°C Testing Circuitry Figure C
Item		Leakage Current	
Object		_____	

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200[V]	250[V]	400[V]	480[V]	500[V]	
NAC-40-103-F	UL60939	0.180	0.225	0.360	0.440	0.450	
NAC-40-223-F	UL60939	0.400	0.500	0.800	0.950	1.000	
NAC-40-683-F	UL60939	1.200	1.500	2.400	2.900	3.100	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

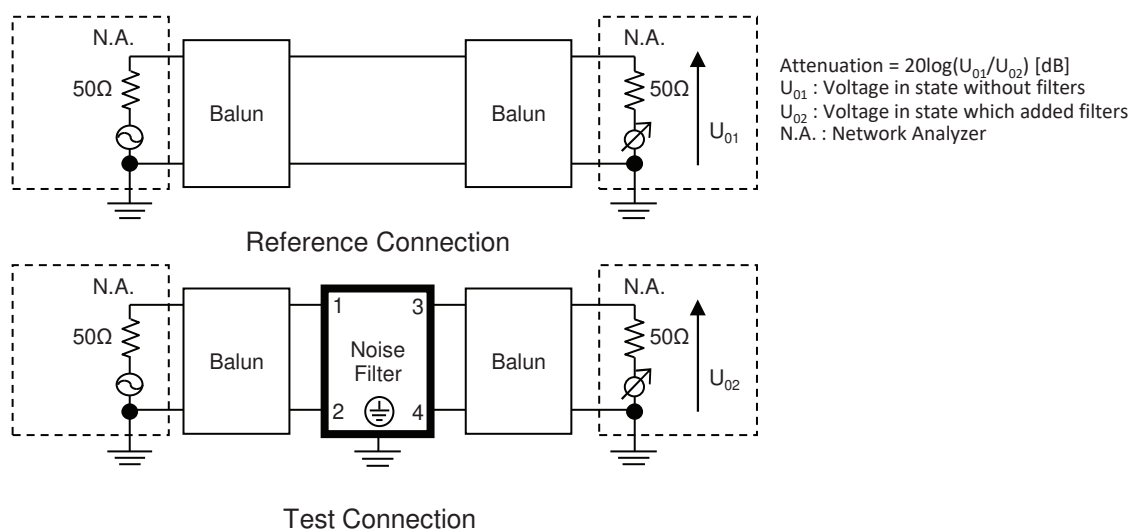


Figure A - 1 Differential mode attenuation measurement



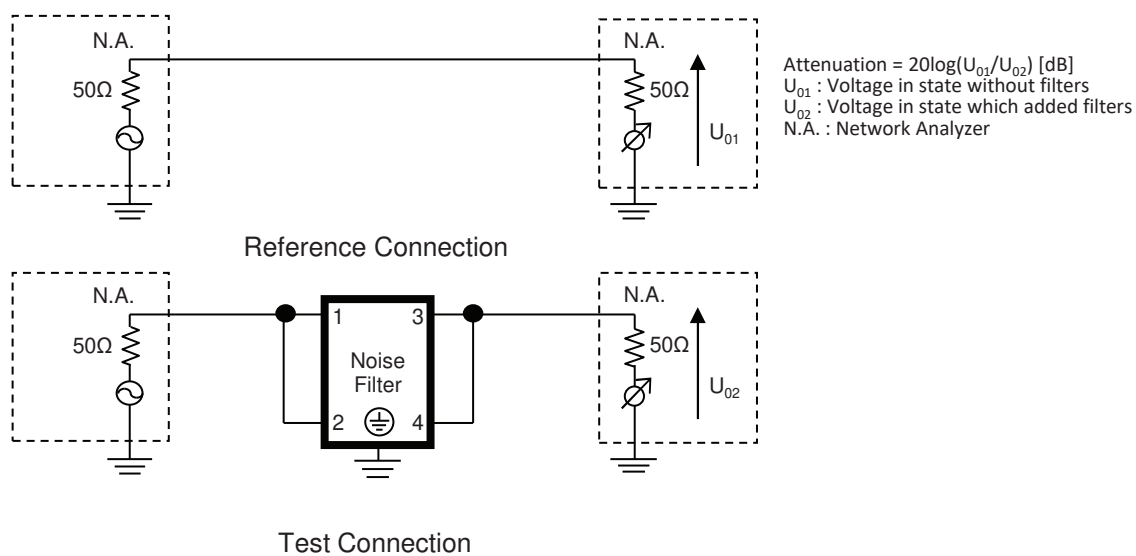



Figure A - 2 Common mode attenuation measurement

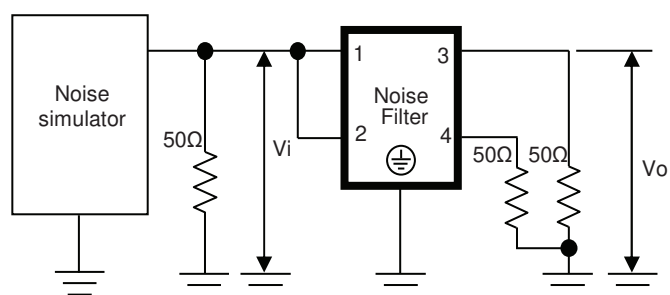

Pulse attenuation measurement



Input impulse waveform



Output impulse waveform

Figure B Pulse attenuation measurement

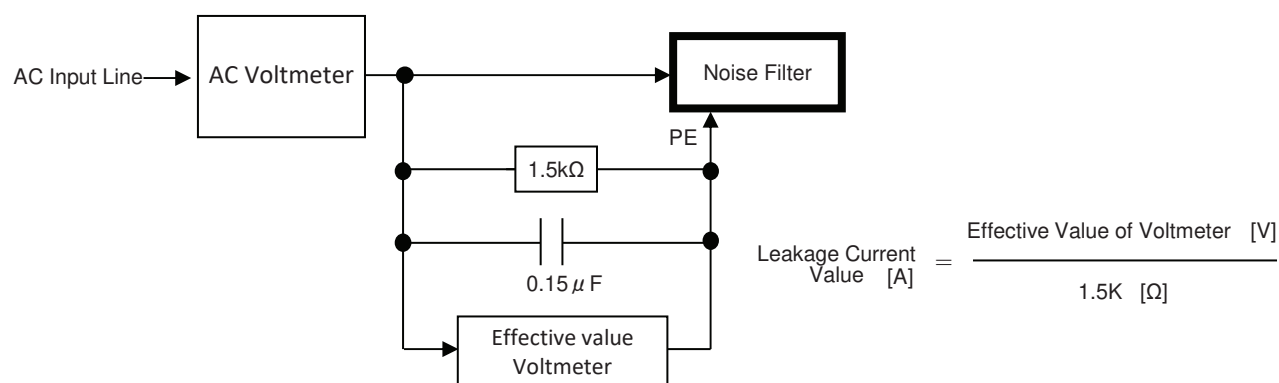


Figure C Leakage current measurement (UL60939)