



DATA SHEET			Date	09-Feb-21
Model	PCA1500F-24		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	M.Yamamoto

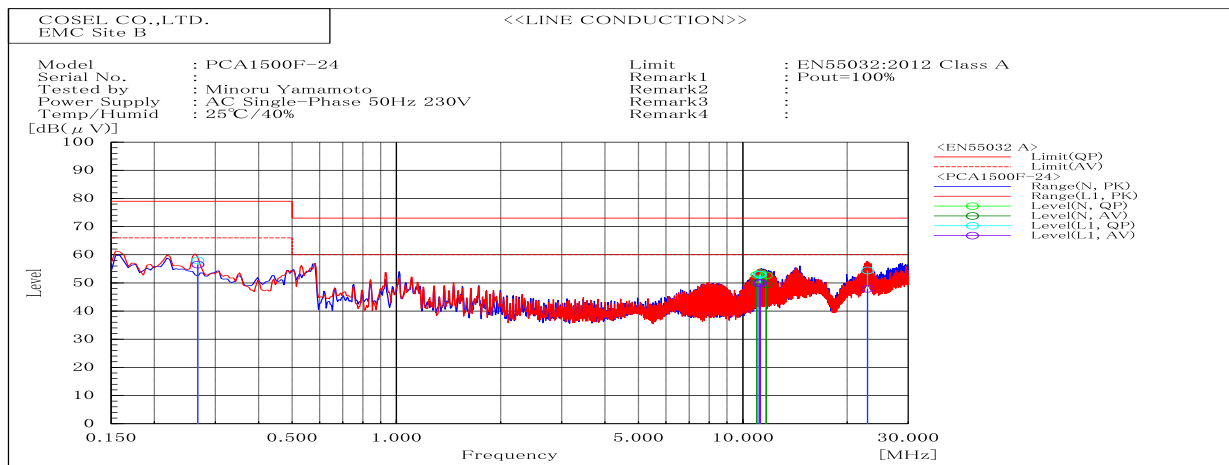


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
10.97	N	52.9	50	73	60	20.1	10	Pass	
11.237	N	53.4	50.4	73	60	19.6	9.6	Pass	
11.68	N	52.7	49.5	73	60	20.3	10.5	Pass	
0.267	L1	58	56.5	79	66	21	9.5	Pass	
11.148	L1	52.9	49.9	73	60	20.1	10.1	Pass	
11.237	L1	53	49.9	73	60	20	10.1	Pass	
22.918	L1	54.4	47.9	73	60	18.6	12.1	Pass	

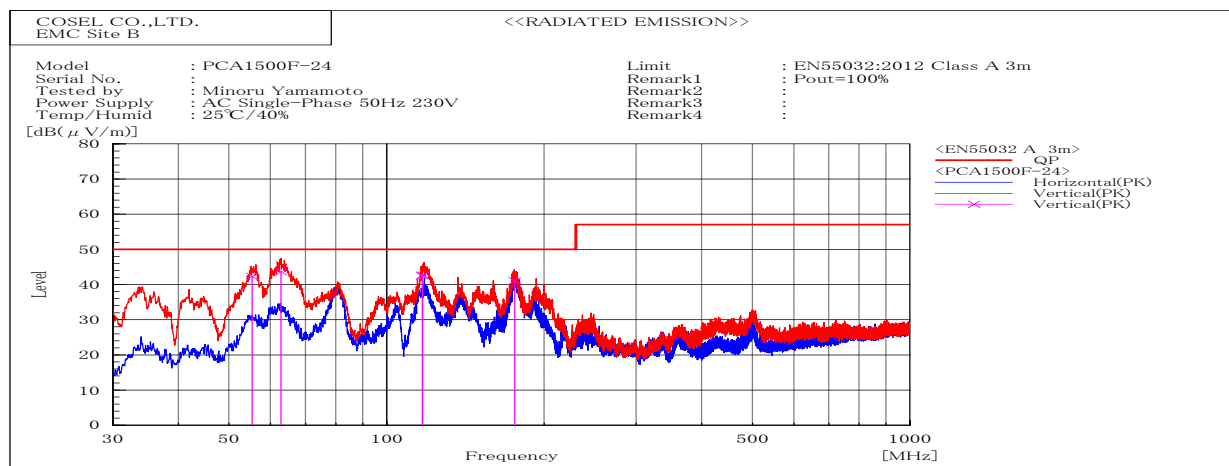


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
55.292	V	Stable	42.3	50	7.7	Pass	100	23	
62.779	V	Stable	43.7	50	6.3	Pass	100.2	353.2	
117.177	V	Stable	42.7	50	7.3	Pass	100.2	157.7	
117.024	V	Stable	42.5	50	7.5	Pass	100.2	167.1	
175.669	V	Stable	41.1	50	8.9	Pass	101.4	255	

DATA SHEET		Date	09-Feb-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Yamamoto

## 1. Line conduction

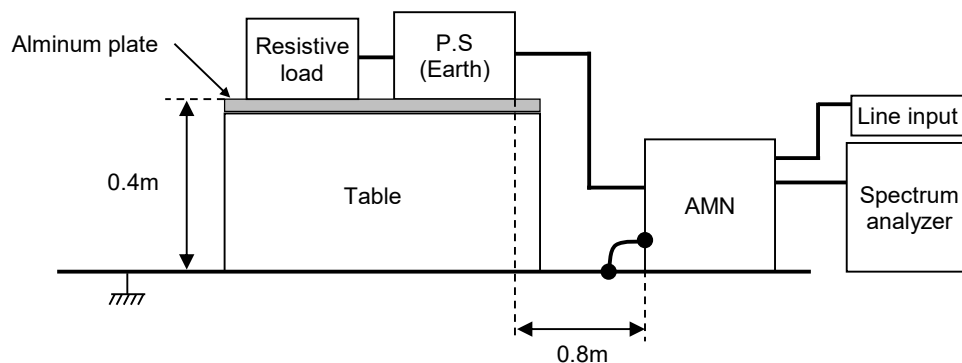

## 2. Radiated emission

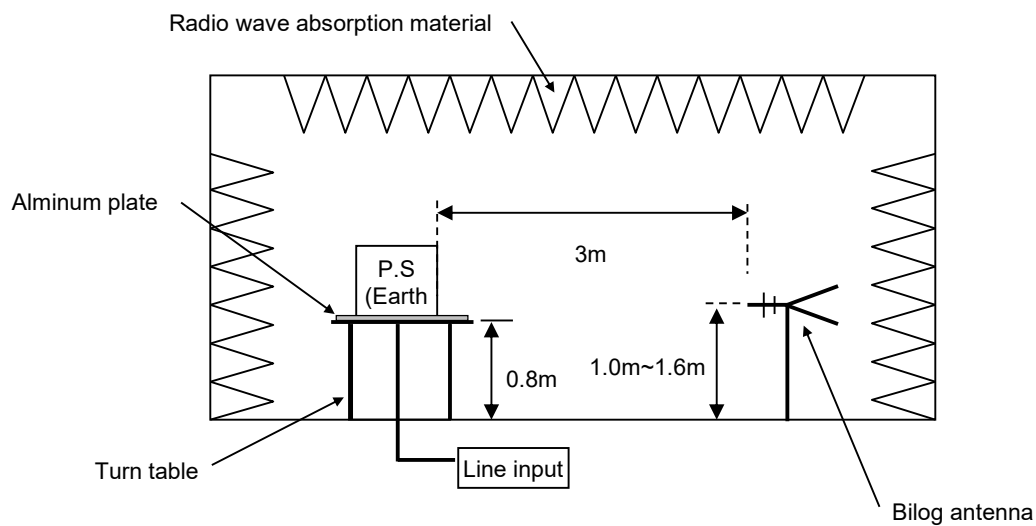


## Conditions

Test : EMI  
Model Name : PCA1500F-24

## Photographs of test set-up

### 1.LINE CONDUCTION

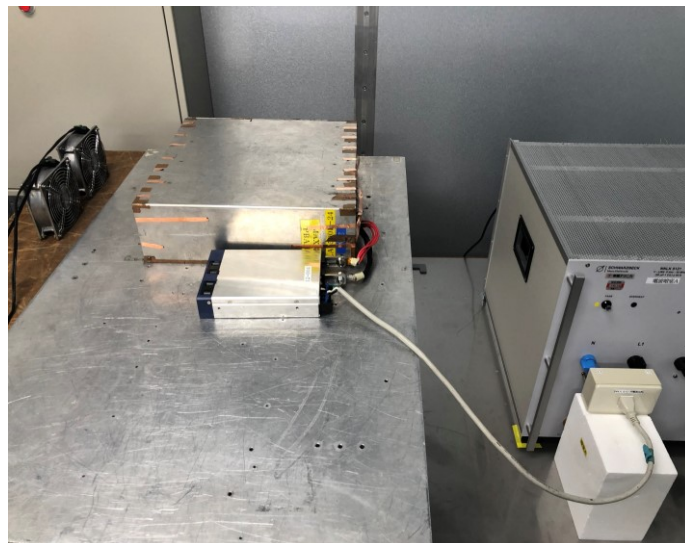

### 2.RADIATED EMISSION

