



DATA SHEET		Date	06-Apr-18
Model	PCA600F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

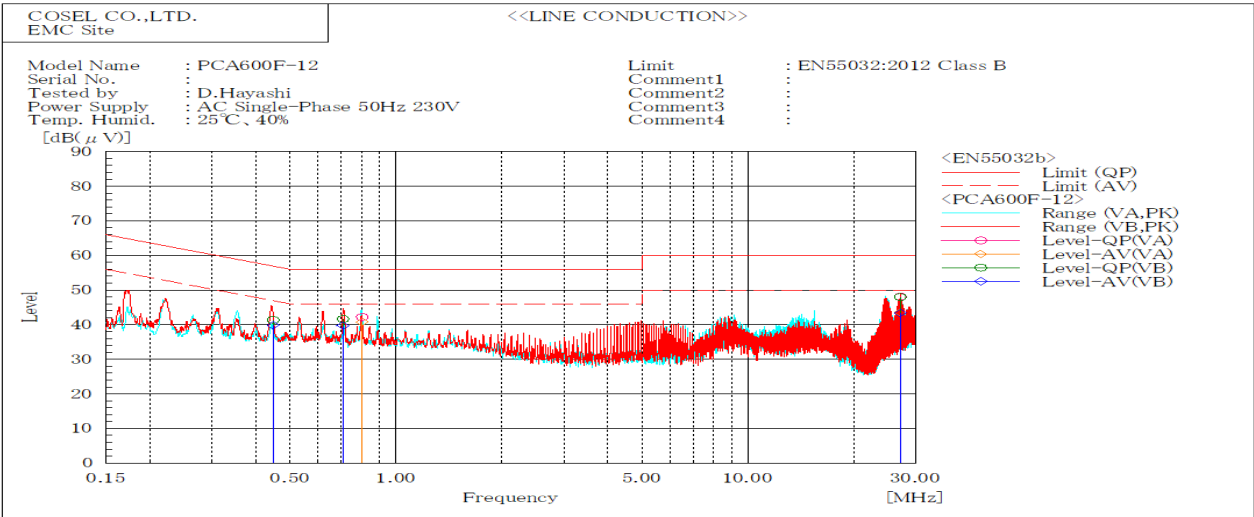


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.44763	VB	41.4	39.8	56.9	46.9	15.5	7.1	Pass	
0.70710	VB	41.6	39.7	56.0	46.0	14.4	6.3	Pass	
0.80184	VA	42.2	40.8	56.0	46.0	13.8	5.2	Pass	
27.15915	VA	48.1	43.5	60.0	50.0	11.9	6.5	Pass	
27.15550	VB	48.0	43.3	60.0	50.0	12.0	6.7	Pass	

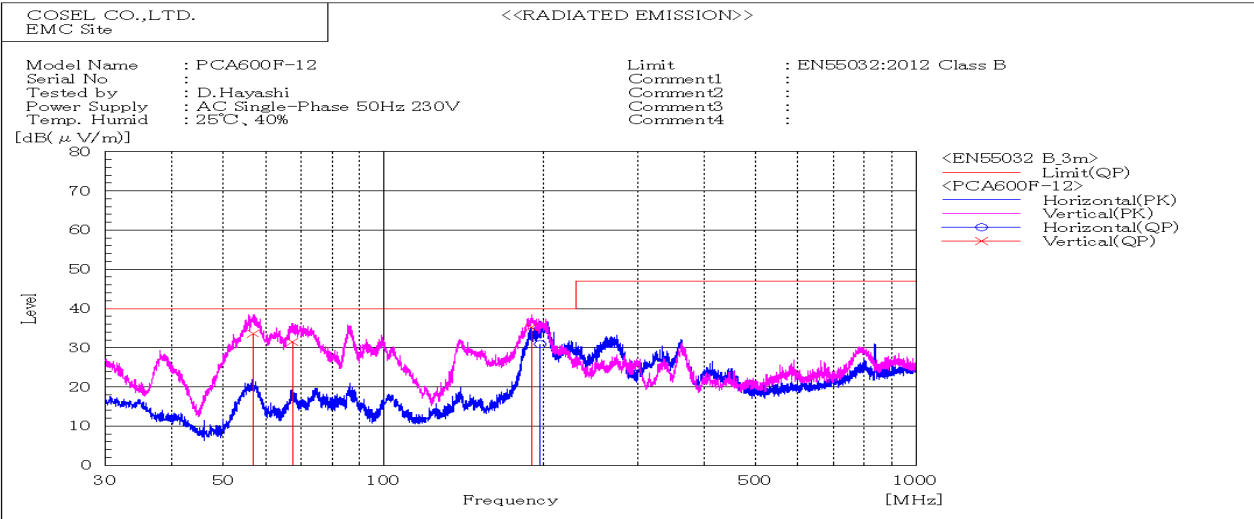


Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
56.806	V	Stable	33.7	40.0	6.3	Pass	107	330	
67.343	V	Stable	31.4	40.0	8.6	Pass	117	62	
189.311	V	Stable	35.2	40.0	4.8	Pass	136	105	
196.725	H	Stable	30.9	40.0	9.1	Pass	156	54	

DATA SHEET		Date	06-Apr-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

1. Line conduction

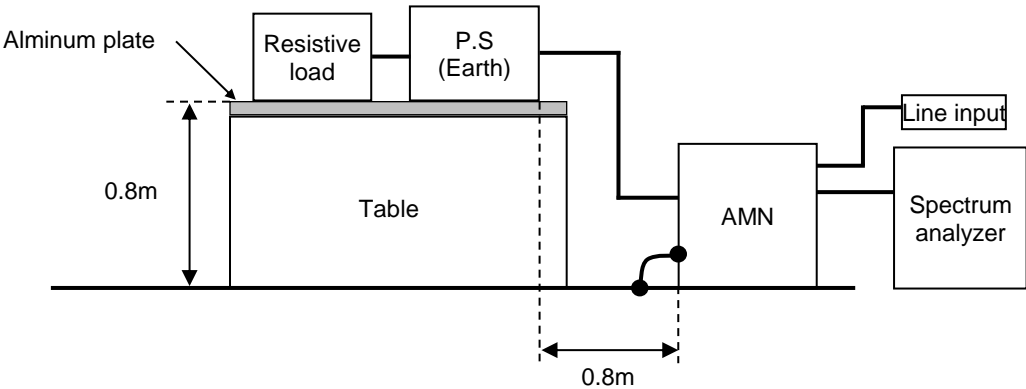

2. Radiated emission

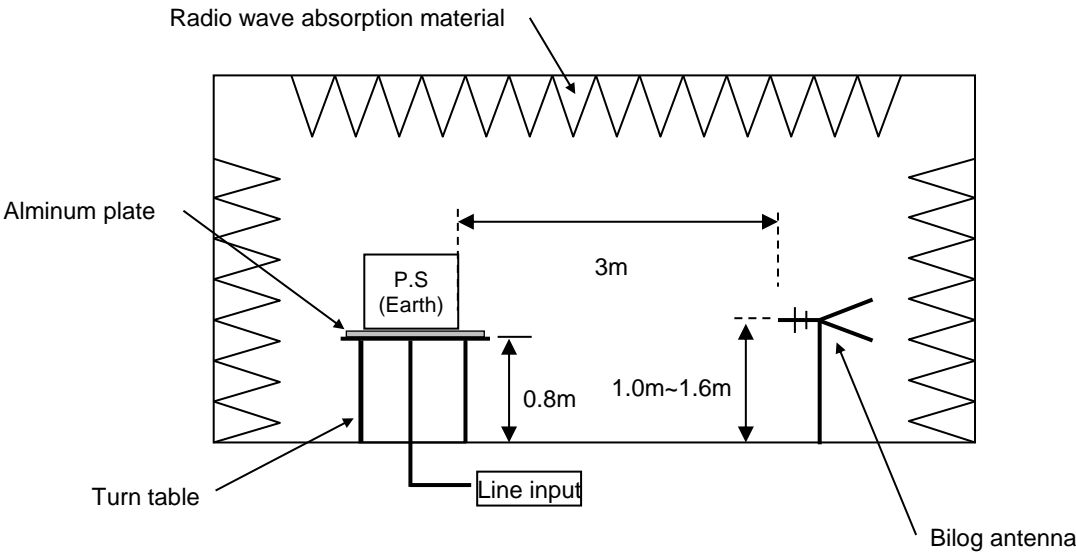

## Conditions

Test : EMI  
Model Name : PCA600F

## O Photographs of test set-up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

