



DATA SHEET		Date	02-Dec-23
Model	PDA15F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

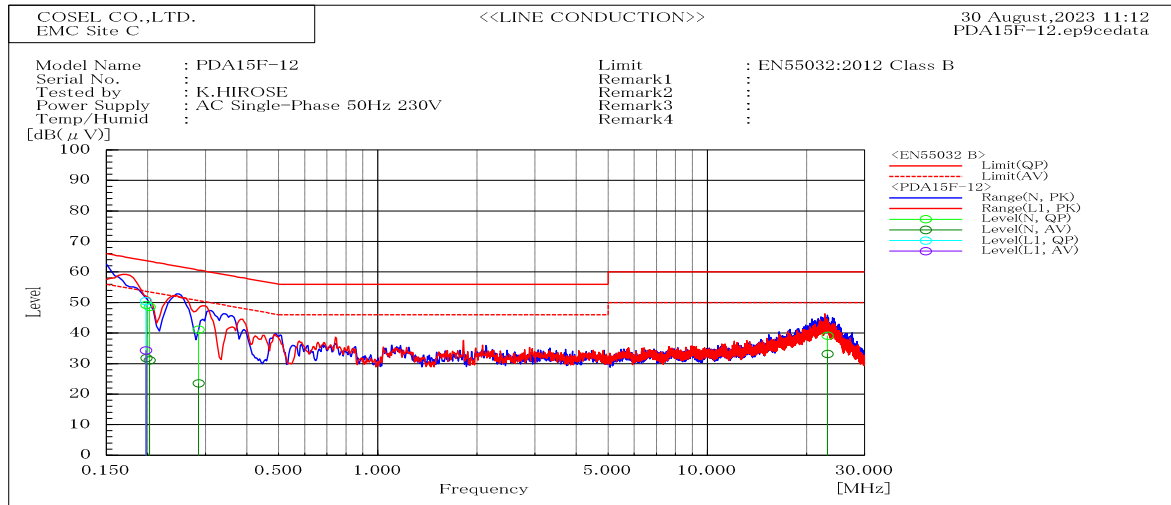


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.198	N	49.2	31.8	63.7	53.7	14.5	21.9	Pass	
0.203	N	48.6	31.1	63.5	53.5	14.9	22.4	Pass	
0.286	N	41.1	23.6	60.6	50.6	19.5	27	Pass	
23.152	N	39.1	33.1	60	50	20.9	16.9	Pass	
0.198	L1	50.5	34.3	63.7	53.7	13.2	19.4	Pass	

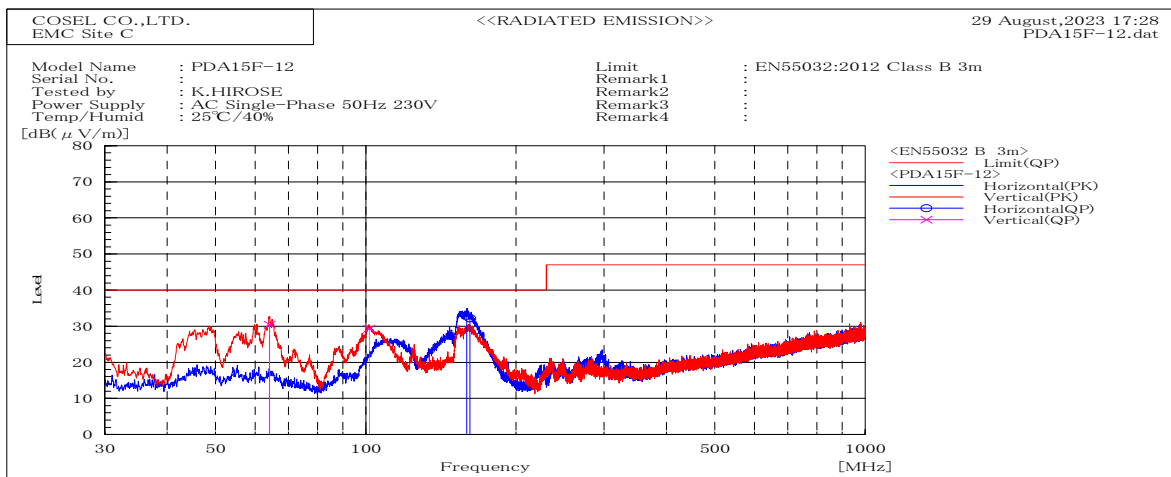


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
64.138	V	Stable	30.4	40	9.6	Pass	100	288.1		
101.501	V	Stable	29.3	40	10.7	Pass	115.7	349.8		
159.289	H	Stable	32.8	40	7.2	Pass	183.9	320.6		
161.755	H	Stable	32.2	40	7.8	Pass	179.9	334.1		

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

1. Line conduction


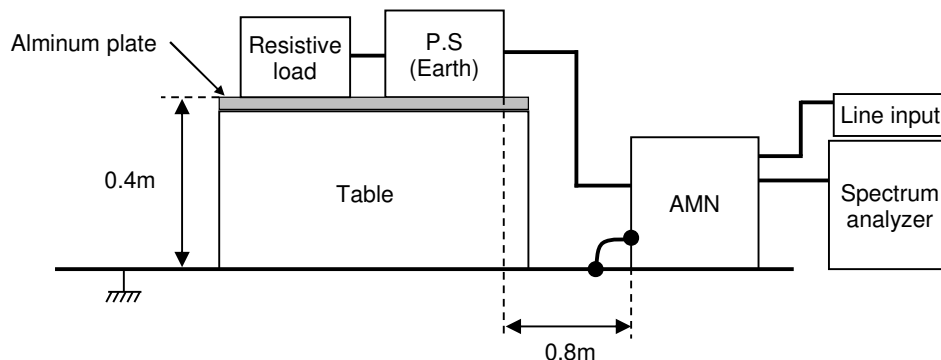


2. Radiated emission

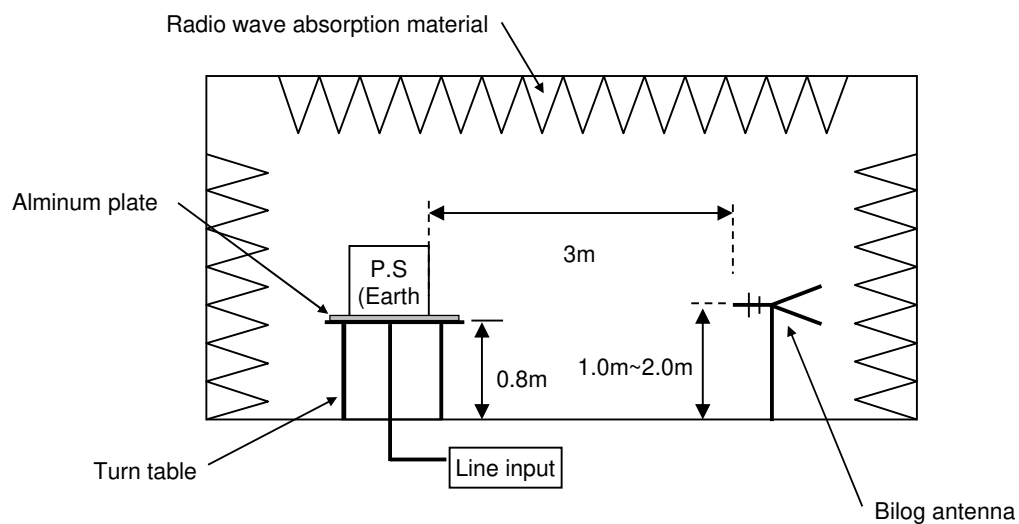

Conditions

Test : EMI
Model Nam: PDA15F-12

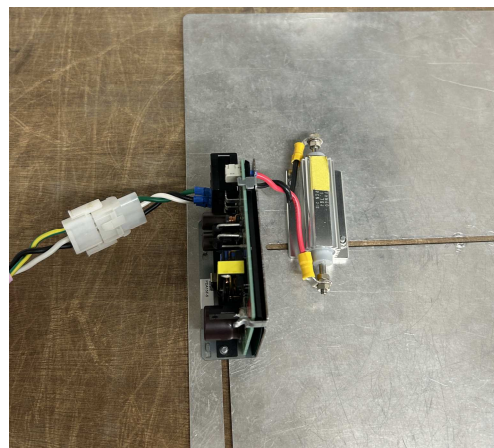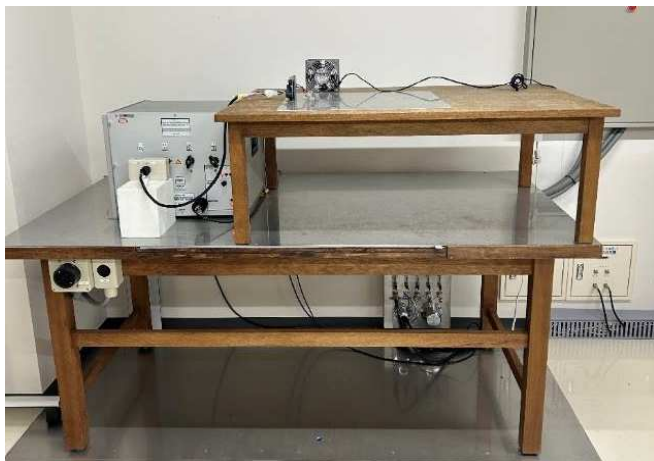1.LINE CONDUCTION**2.RADIATED EMISSION**