



DATA SHEET		Date	02-Dec-23
Model	PDA15F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

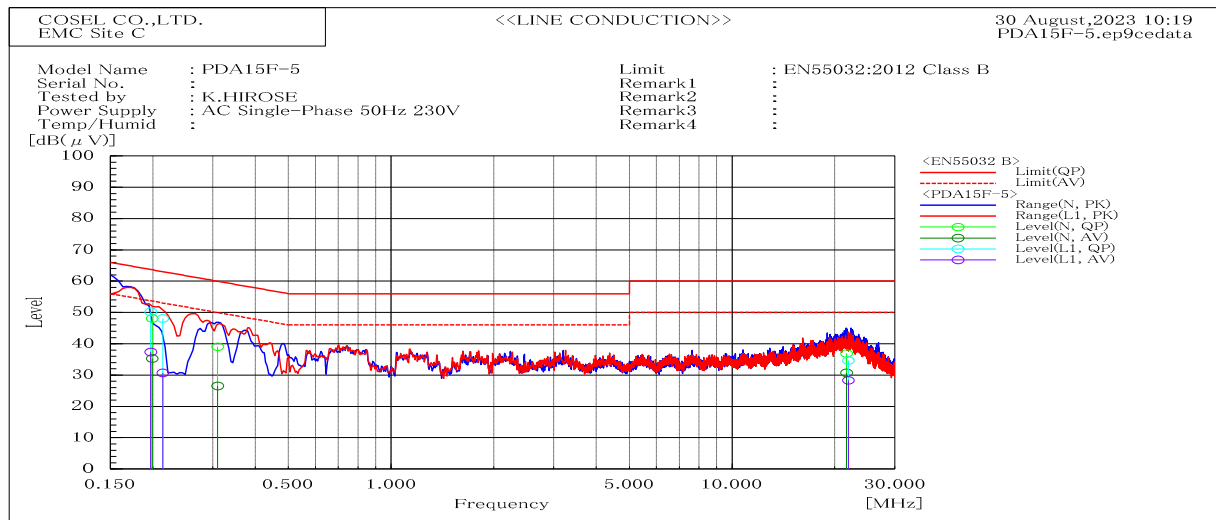


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.197	L1	50.3	37.4	63.7	53.7	13.4	16.3	Pass	
0.214	L1	48.1	30.7	63.1	53.1	15	22.4	Pass	
21.919	L1	34.6	28.3	60	50	25.4	21.7	Pass	
0.199	N	48.1	35.3	63.6	53.6	15.5	18.3	Pass	
0.31	N	39	26.5	60	50	21	23.5	Pass	
21.661	N	36.9	30.7	60	50	23.1	19.3	Pass	

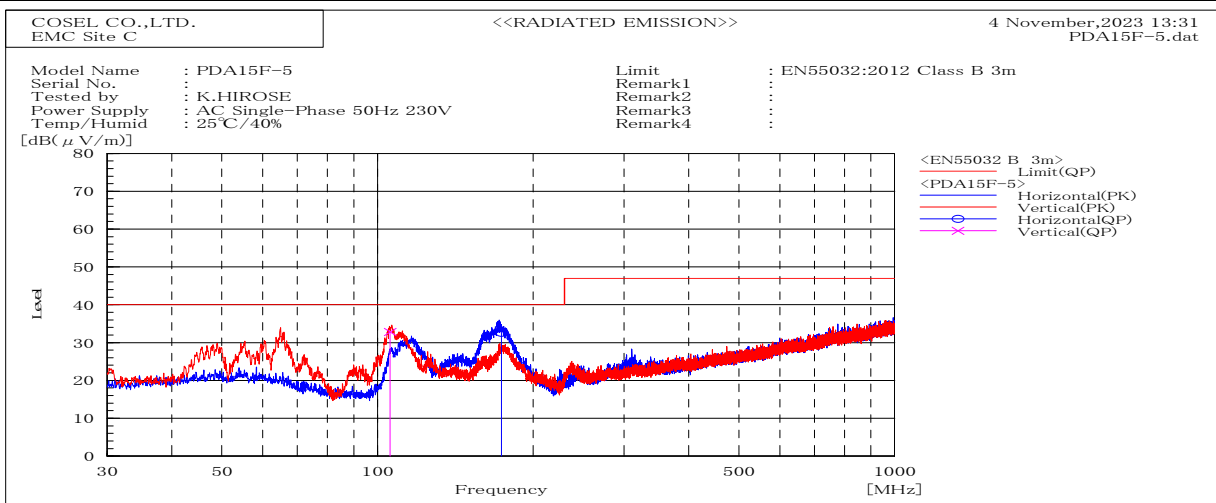


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
173.617	H	Stable	32.6	40	7.4	Pass	177.2	350	
105.775	V	Stable	32.8	40	7.2	Pass	101.5	345.8	

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

1. Line conduction

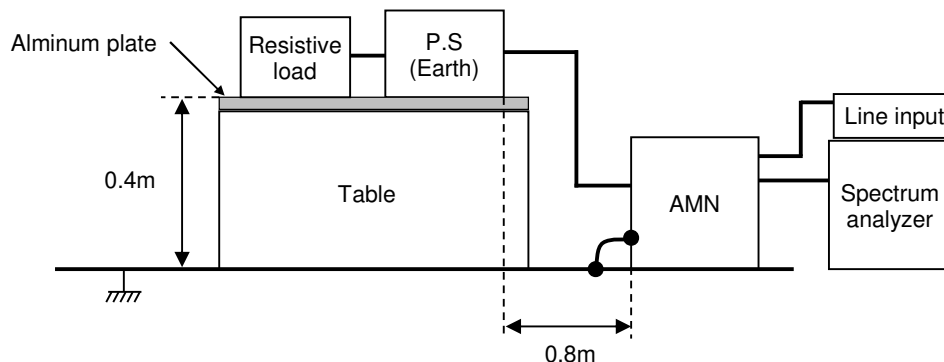


2. Radiated emission

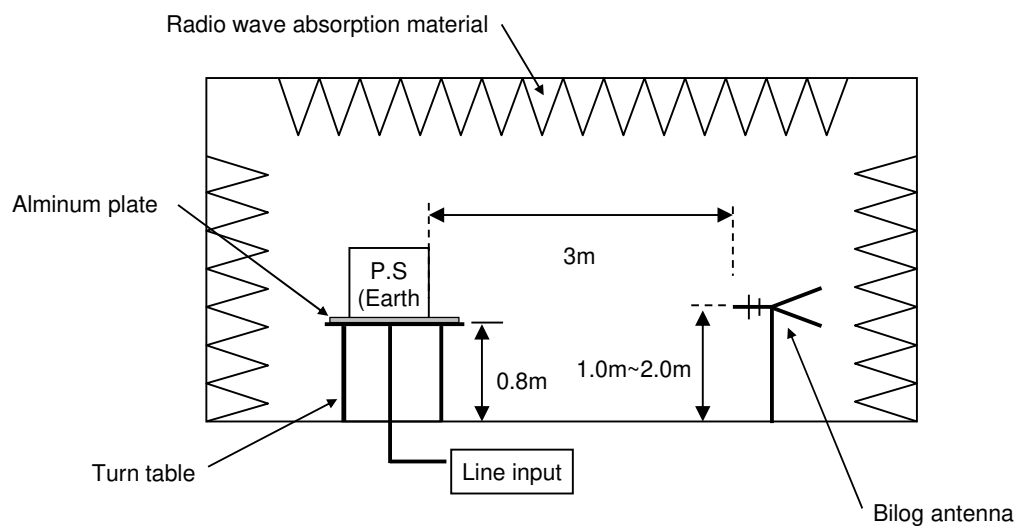

Conditions

Test : EMI
Model Nam: PDA15F-5

1.LINE CONDUCTION

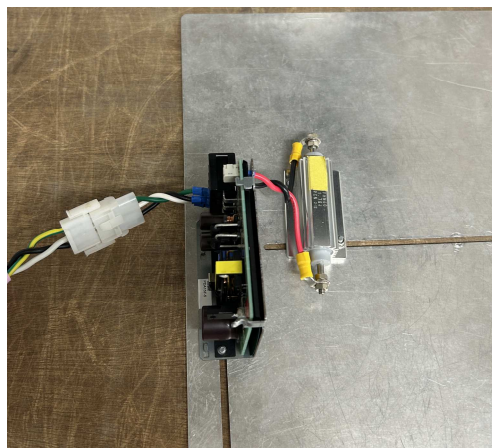

2.RADIATED EMISSION

