



EXTRA TEST DATA OF PDA30F-24

*Regulated DC Power Supply
Apr, 20, 2024*

COSEL CO.,LTD.




CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Hiccup cycle (by Overcurrent Protection)	3
4.Figure of Testing Circuitry	4

(Final Page 4)

COSEL

Model	PDA30F-24		
Item	Inrush Current (enlargement)	Temperature	25°C
Object		Testing Circuitry	A

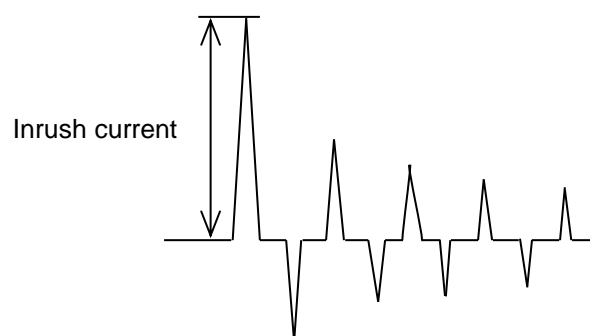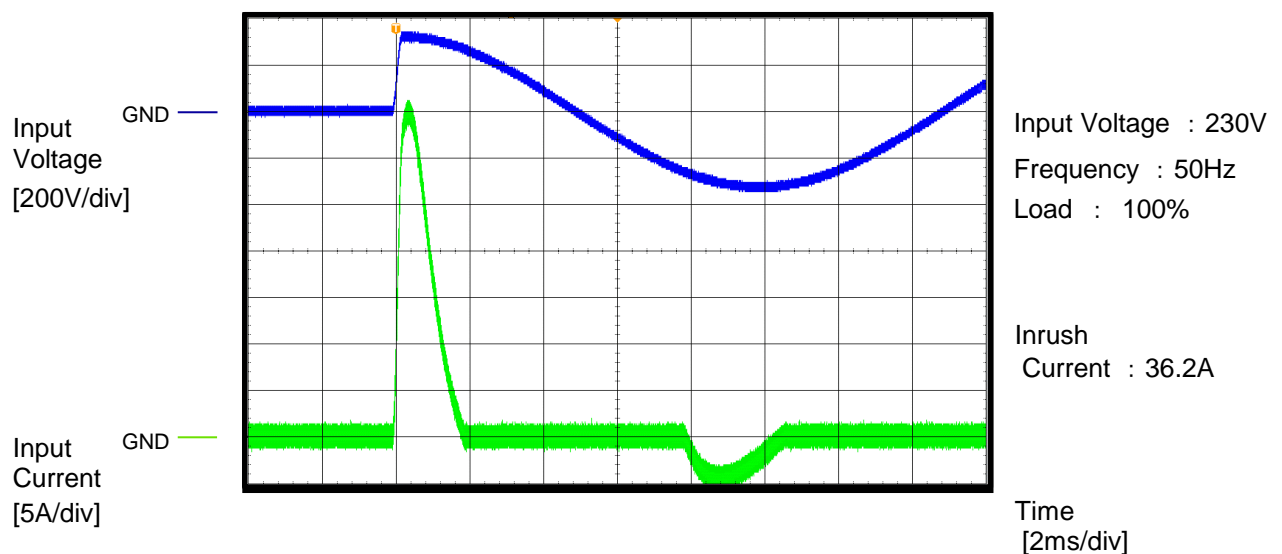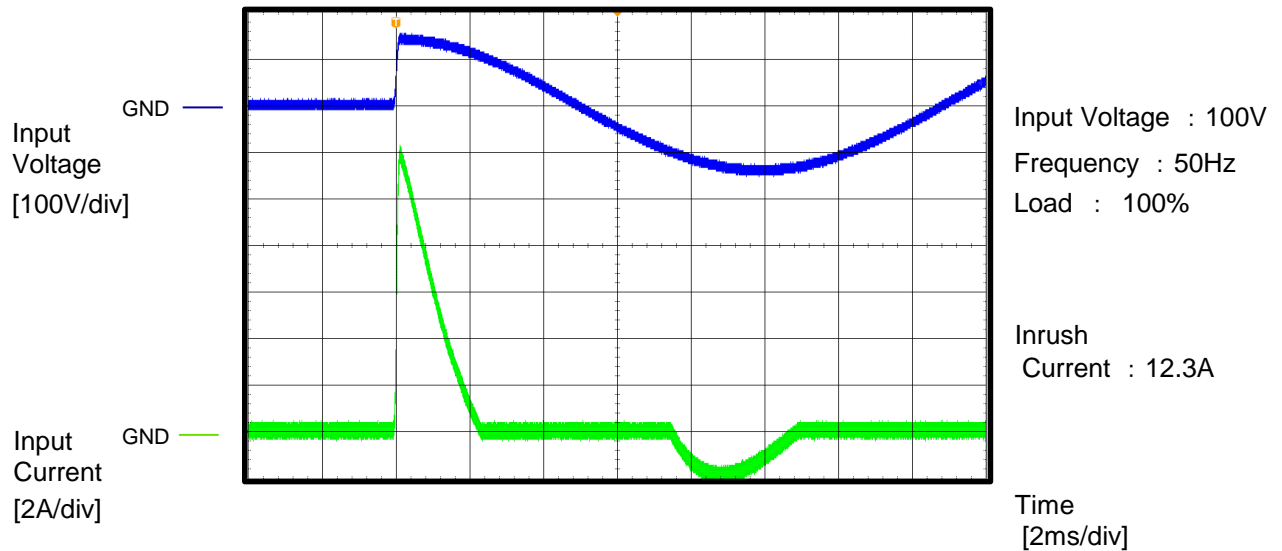


COSEL

Model	PDA30F-24	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

Input Voltage
[200V/div]

Output Voltage
[50mV/div]

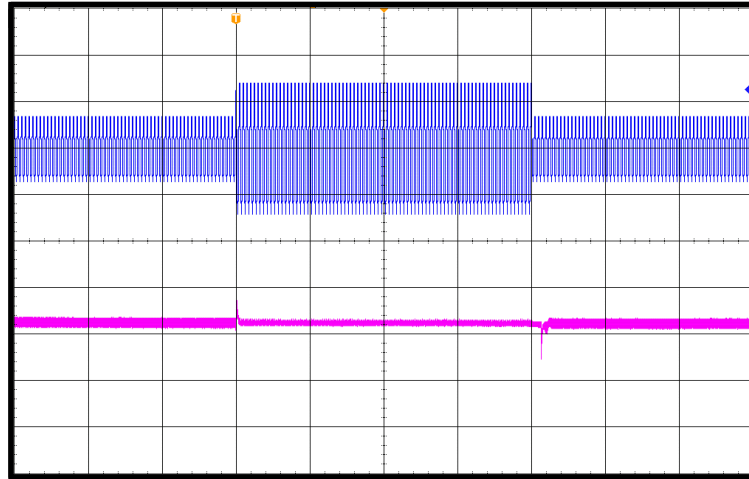


Input Voltage :
100V \Leftrightarrow 230V

Frequency : 50Hz
Load : 100%

Time
[400ms/div]

Input Voltage
[200V/div]



Output Voltage
[50mV/div]

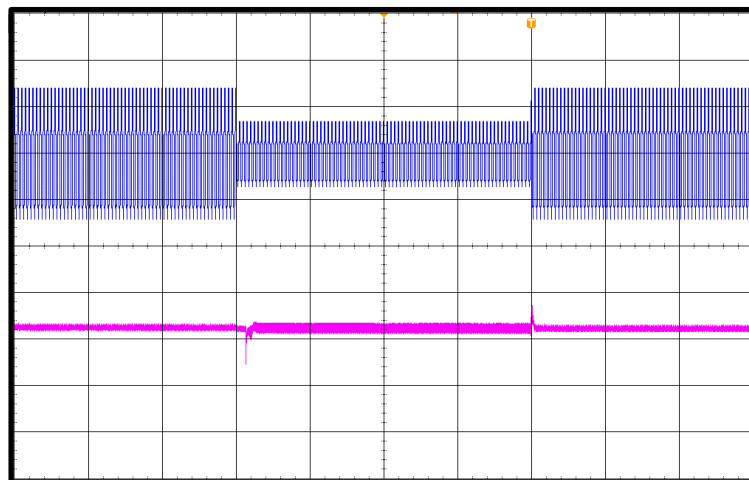

Input Voltage :
230V \Leftrightarrow 100V

Frequency : 50Hz
Load : 100%

Time
[400ms/div]

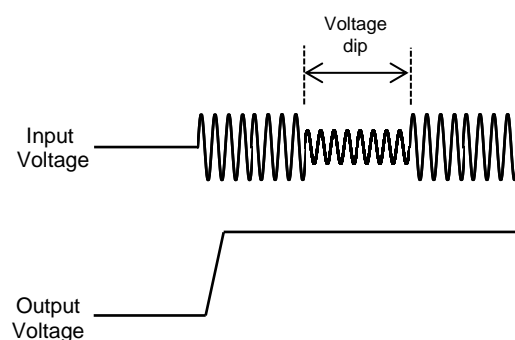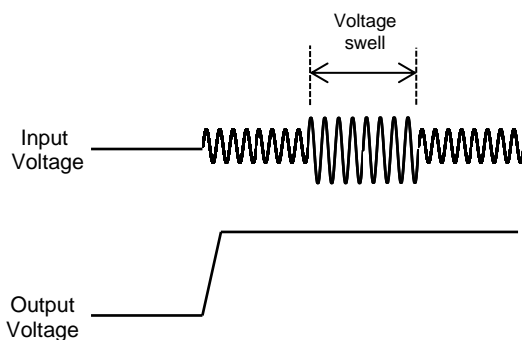

COSEL