



EXTRA TEST DATA OF PDA50F-12

*Regulated DC Power Supply
Apr, 20, 2024*

COSEL CO.,LTD.




CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Hiccup cycle (by Overcurrent Protection)	3
4.Figure of Testing Circuitry	4

(Final Page 4)





COSEL

Model	PDA50F-12		
Item	Inrush Current (enlargement)	Temperature	25°C
Object	_____	Testing Circuitry	A

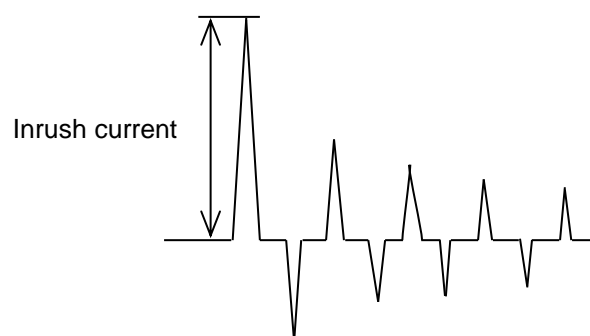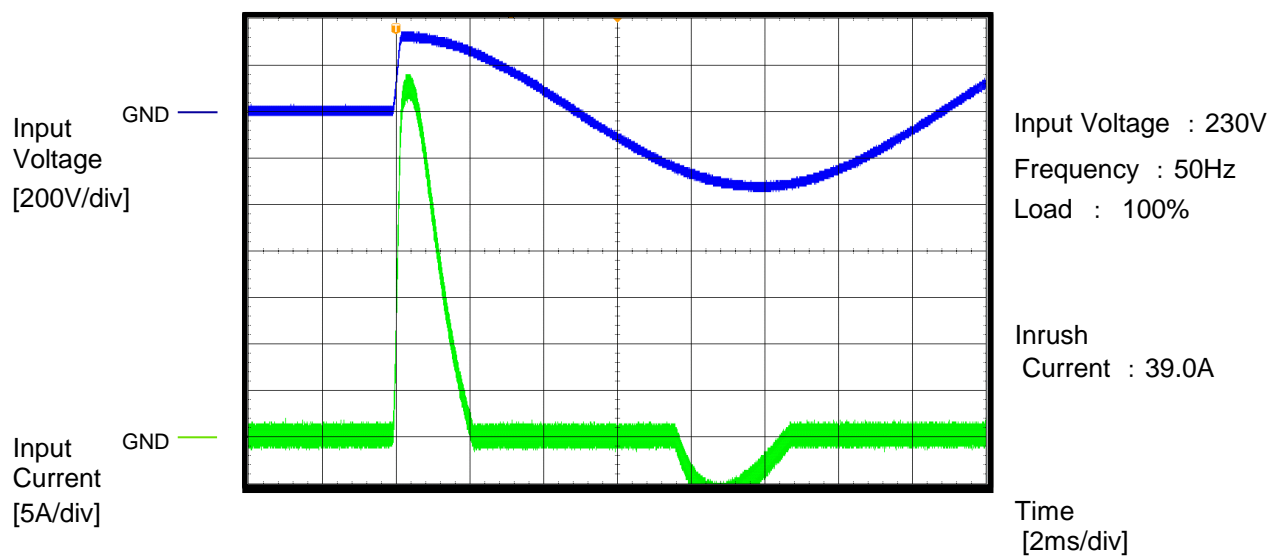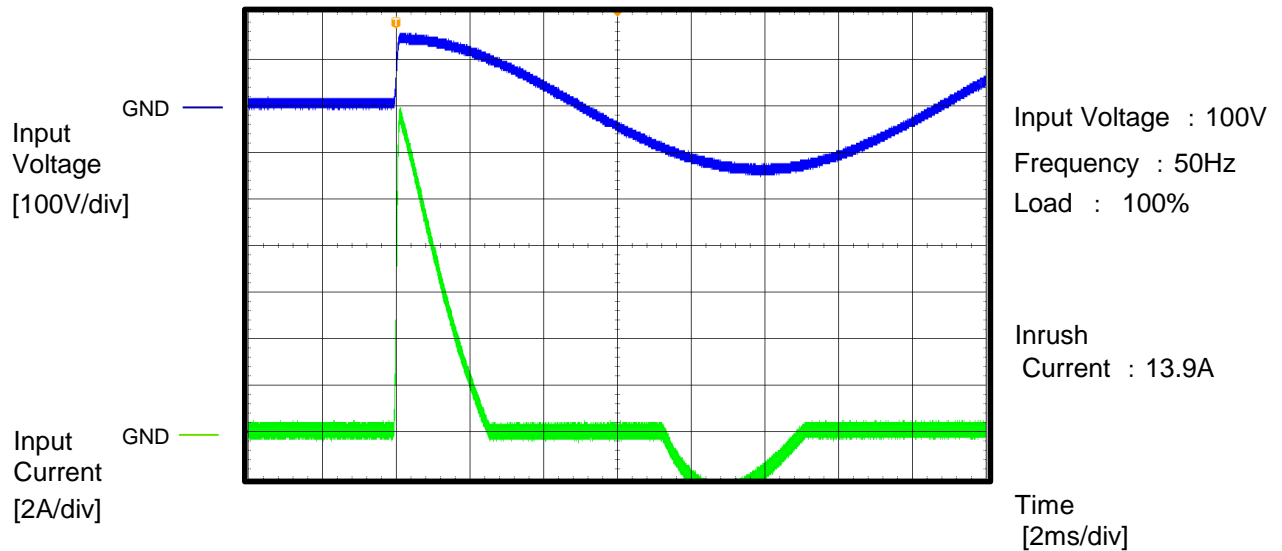

COSEL


Model	PDA50F-12	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

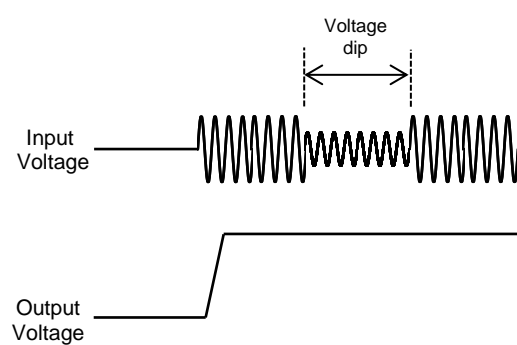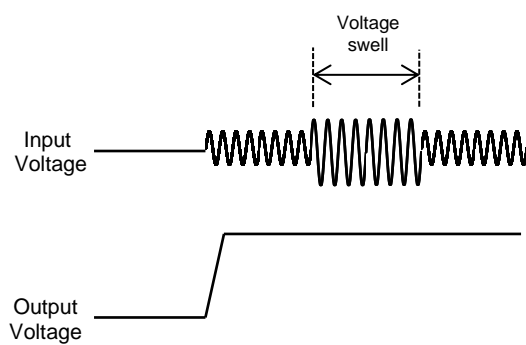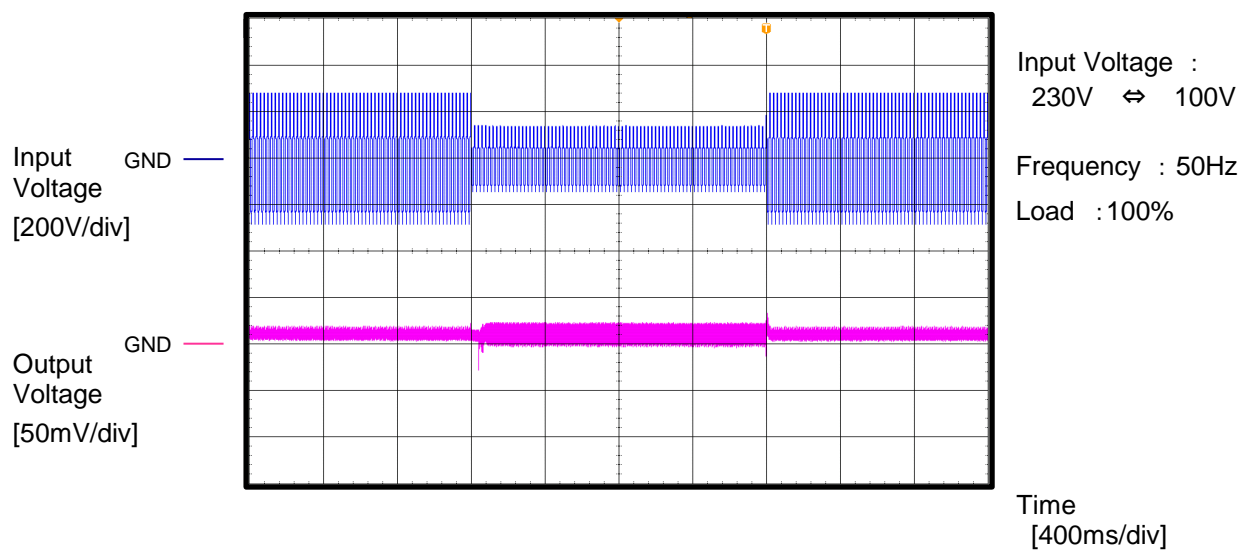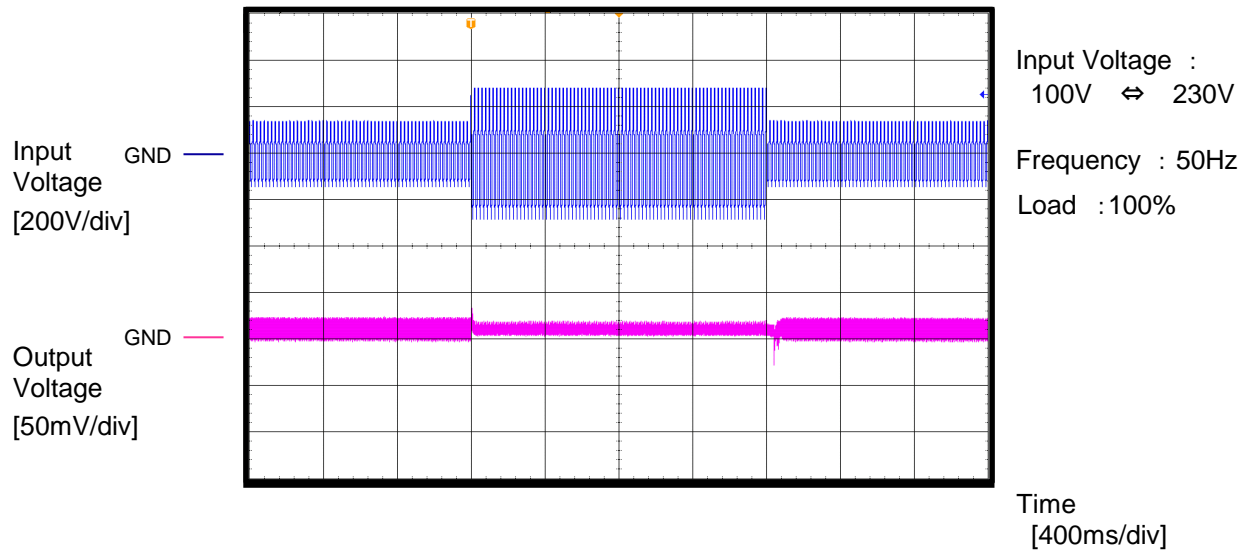

COSEL

		Temperature 25°C Testing Circuitry A Load : Short
Model	PDA50F-12	
Item	Hiccup cycle (by Overcurrent Protection)	
Object	_____	

Output
Current
[2A/div]

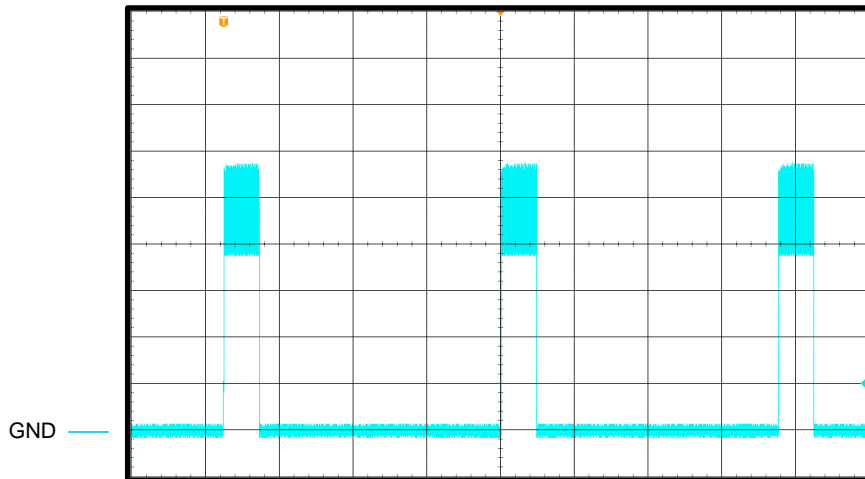

Input Voltage : 100V


Short-circuit
current : 11.5A

ON Time : 192ms

Hiccup mode
time : 1505ms

Time
[400ms/div]

Output
Current
[2A/div]

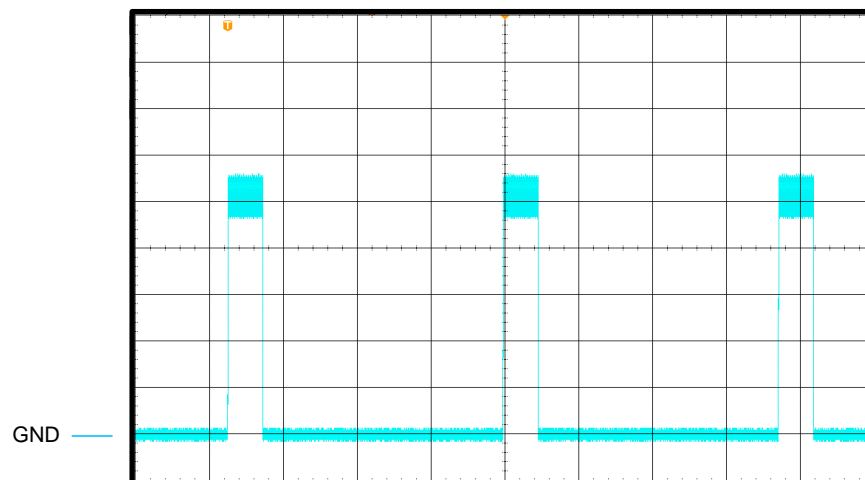

Input Voltage : 230V

Short-circuit
current : 11.2A

ON Time : 190ms

Hiccup mode
time : 1492ms

Time
[400ms/div]

