



DATA SHEET		Date	02-Dec-23
Model	PDA50F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

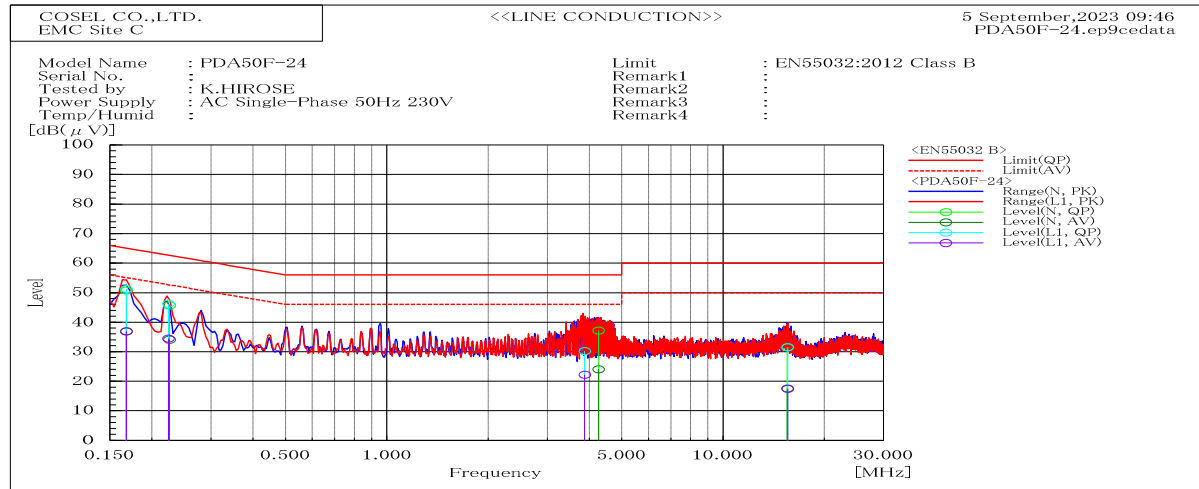


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.168	L1	51.3	37	65.1	55.1	13.8	18.1	Pass	
0.224	L1	46.2	34.5	62.7	52.7	16.5	18.2	Pass	
3.874	L1	30.3	22.2	56	46	25.7	23.8	Pass	
15.573	L1	31.6	17.5	60	50	28.4	32.5	Pass	
0.168	N	50.7	36.9	65.1	55.1	14.4	18.2	Pass	
0.226	N	45.7	34.1	62.6	52.6	16.9	18.5	Pass	
4.263	N	37.1	24.1	56	46	18.9	21.9	Pass	
15.515	N	31.5	17.6	60	50	28.5	32.4	Pass	

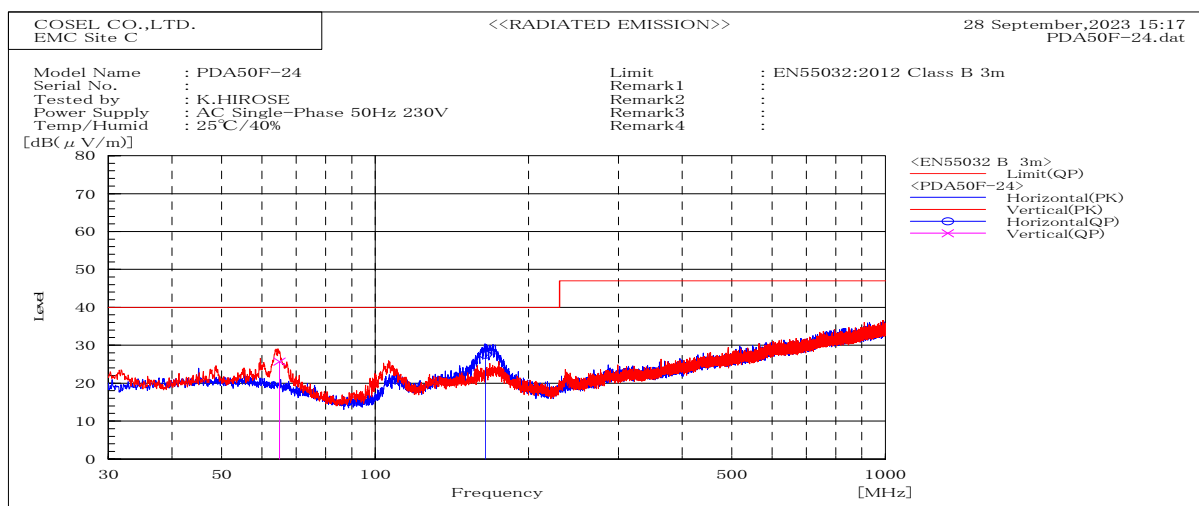


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
64.945	V	Stable	25.7	40	14.3	Pass	100.2	263.7	
164.422	H	Stable	27.5	40	12.5	Pass	181.7	326.9	

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

1. Line conduction

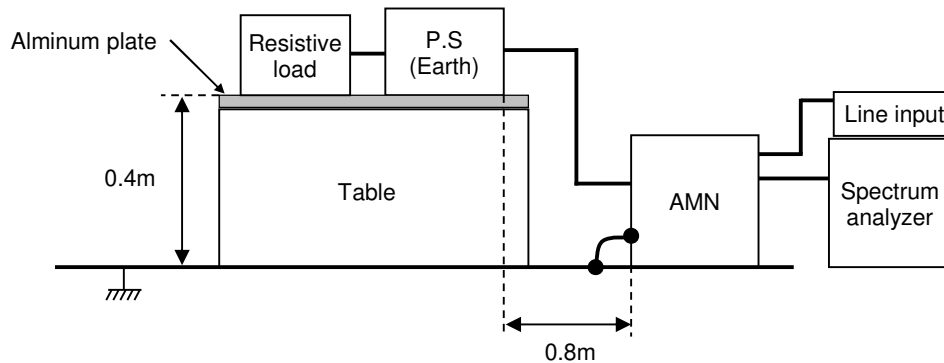

2. Radiated emission

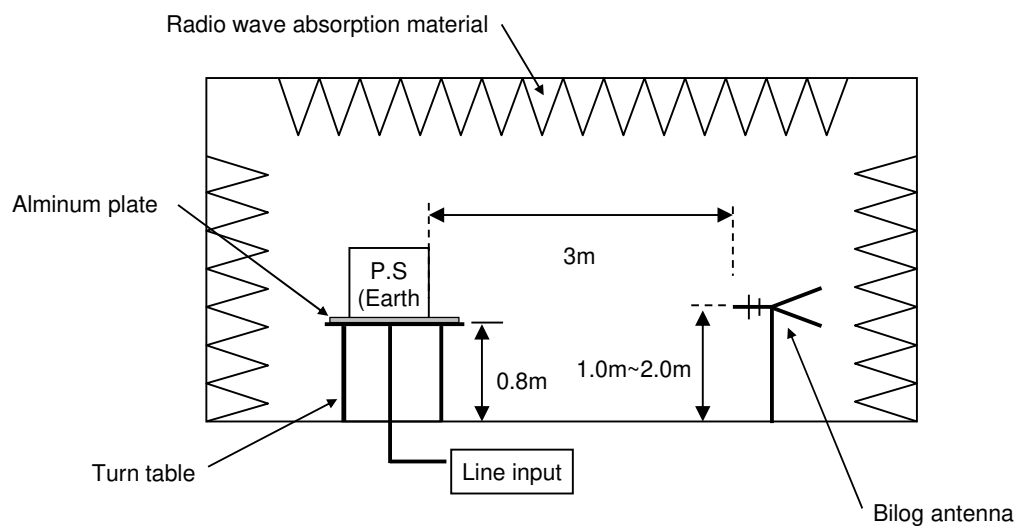

Conditions

Test : EMI
Model Nam : PDA50F-24

1.LINE CONDUCTION**2.RADIATED EMISSION**