



DATA SHEET		Date	03-Aug-18
Model	PJA1000F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kaku

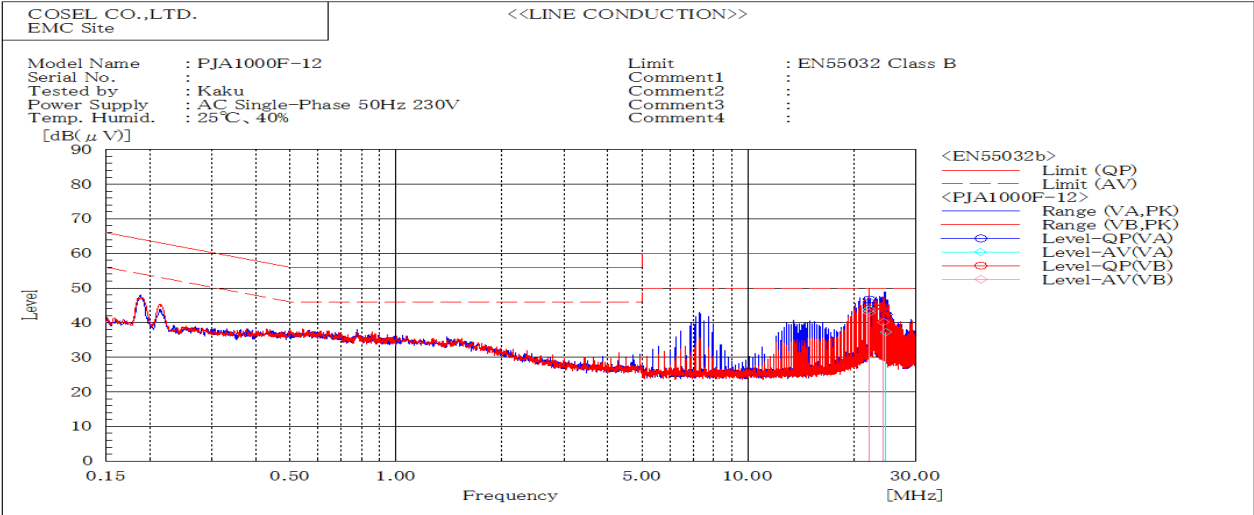

Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
22.15	VB	45.8	42.9	60.0	50.0	14.2	7.1	Pass	
22.16	VA	46.7	43.8	60.0	50.0	13.3	6.2	Pass	
24.31	VB	44.5	40.1	60.0	50.0	15.5	9.9	Pass	
24.74	VA	42.3	37.3	60.0	50.0	17.7	12.7	Pass	

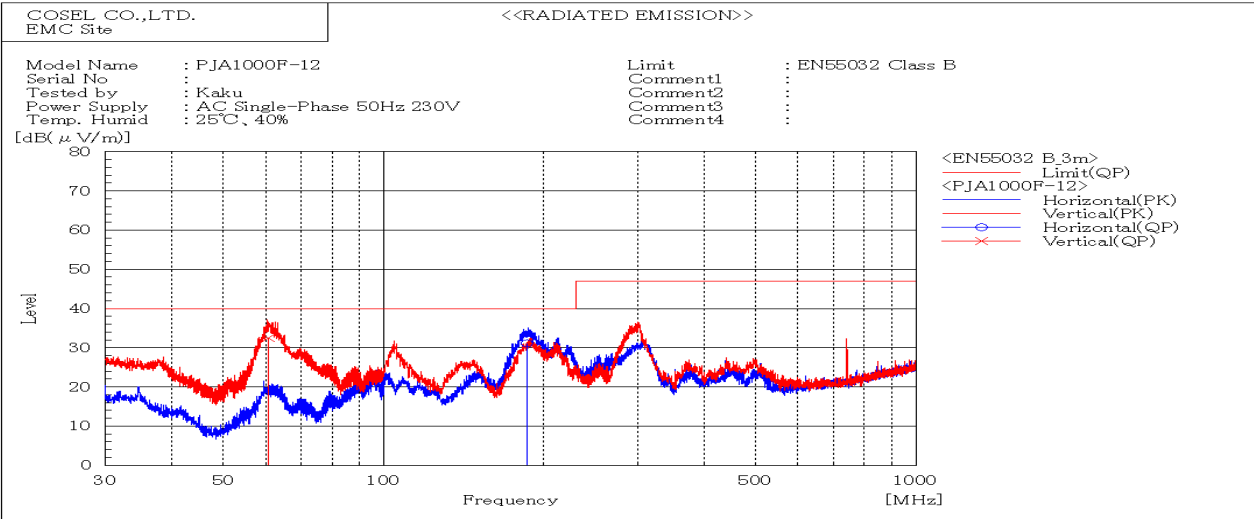


Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
60.72	V	Stable	32.5	40.0	7.5	Pass	109	334	
185.61	H	Stable	31.1	40.0	8.9	Pass	154	316	



DATA SHEET		Date	03-Aug-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kaku

1. Line conduction

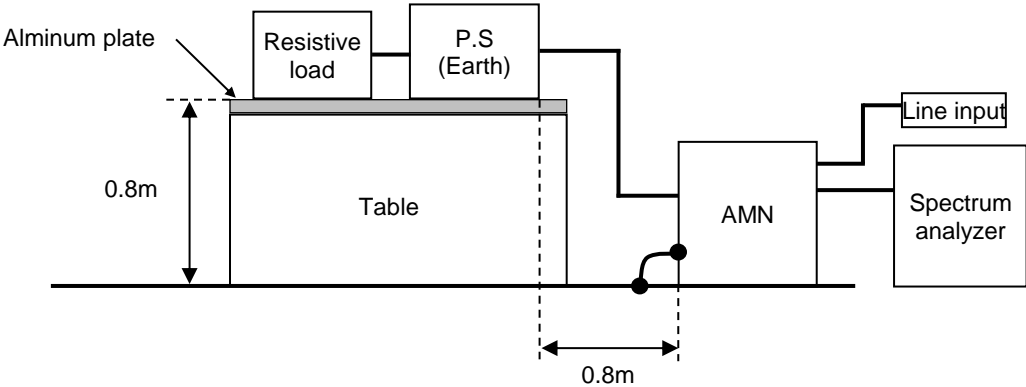

2. Radiated emission

