



DATA SHEET		Date	10-May-17
Model	PJA1500F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

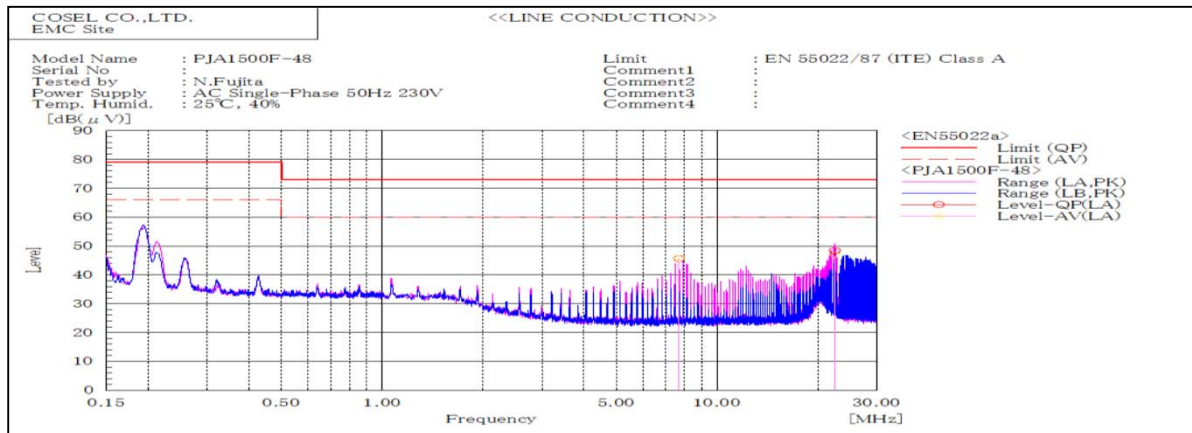


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
7.70415	LA	24.7	24.8	20.9	45.6	45.7	73	60	27.4	14.3	Pass	
22.46625	LA	27	25.5	21.4	48.4	46.9	73	60	24.6	13.1	Pass	

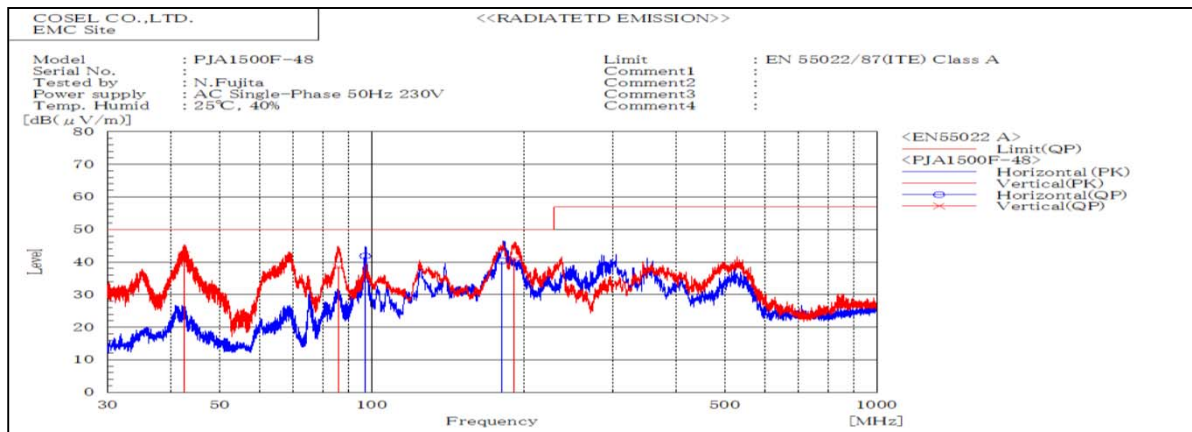

Frequency MHz	Polarization	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
42.578	V	Stable	55.8	-13.6	42.2	50	7.8	Pass	155	283	
86.031	V	Stable	60.7	-22.3	38.4	50	11.6	Pass	101	264	
97.155	H	Stable	59.7	-17.8	41.9	50	8.1	Pass	199	341	
181.003	H	Stable	55.5	-15.2	40.3	50	9.7	Pass	200	133	
191.708	V	Stable	55.4	-14.4	41	50	9	Pass	102	112	

DATA SHEET		Date	10-May-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

## 1. Line conduction

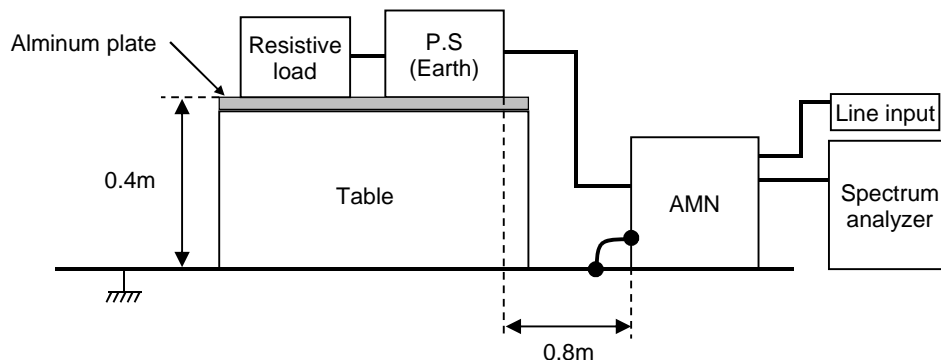

## 2. Radiated emission

