



DATA SHEET		Date	14-Jul-17
Model	PJA300F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

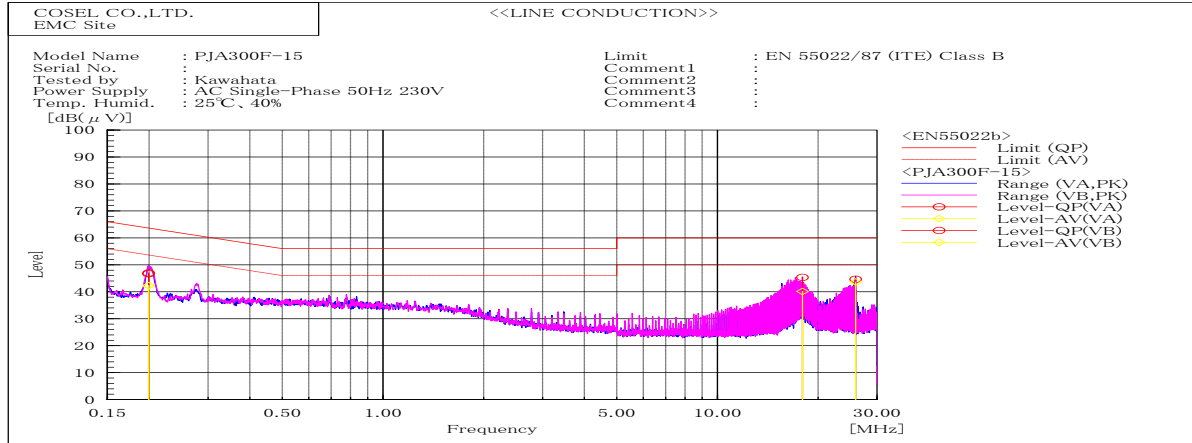


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.19933	VB	26.7	22	20.3	47	42.3	63.6	53.6	16.6	11.3	Pass	
0.19921	VA	26.4	21.9	20.3	46.7	42.2	63.6	53.6	16.9	11.4	Pass	
17.9521	VB	24.2	19	21.1	45.3	40.1	60	50	14.7	9.9	Pass	
25.8861	VB	23.5	22.5	21.1	44.6	43.6	60	50	15.4	6.4	Pass	

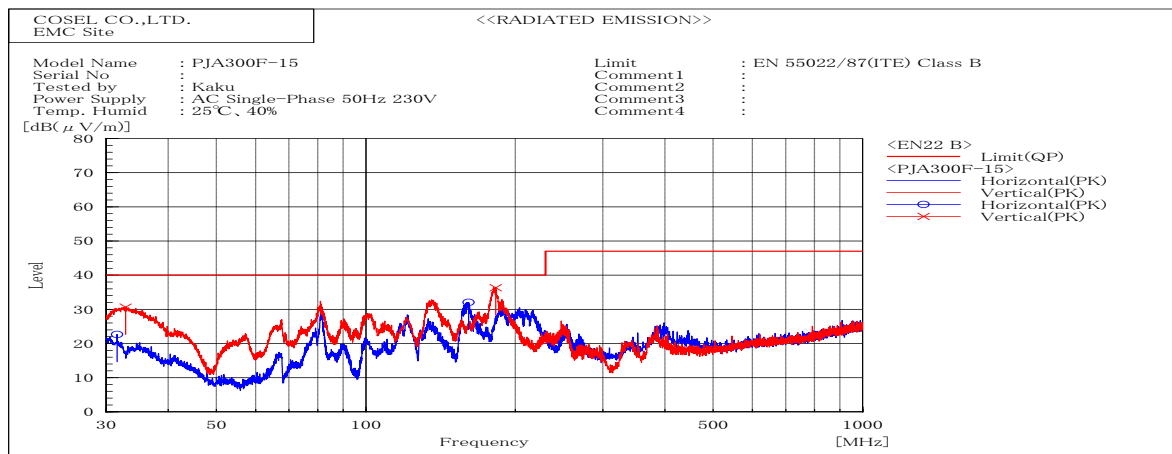

Frequency MHz	Polarization	Stability	Reading dB(μV)	Factor dB(1/m)	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
31.819	H	Stable	21.1	-10.5	10.6	40.0	29.4	Pass	142	300	
32.742	V	Stable	37.9	-9.7	28.2	40.0	11.8	Pass	118	275	
159.932	H	Stable	38.2	-13.7	24.5	40.0	15.5	Pass	158	46	
181.621	V	Stable	38.8	-12.1	26.7	40.0	13.3	Pass	100	288	

DATA SHEET		Date	14-Jul-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

## 1. Line conduction

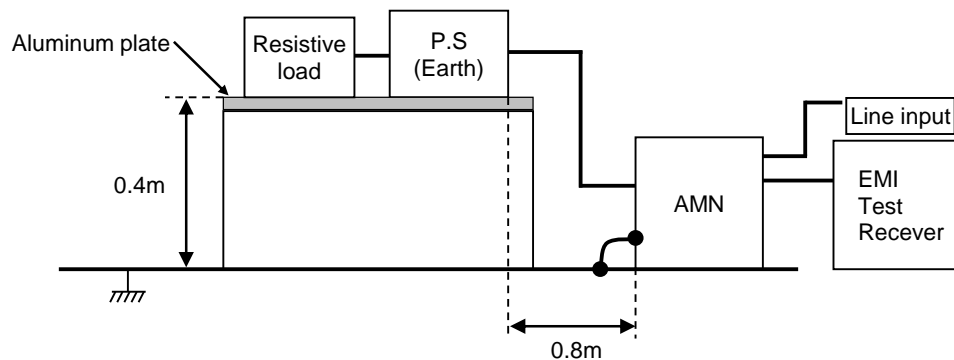

## 2. Radiated emission

