



DATA SHEET		Date	28-Jan-21
Model	PJMA1000F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

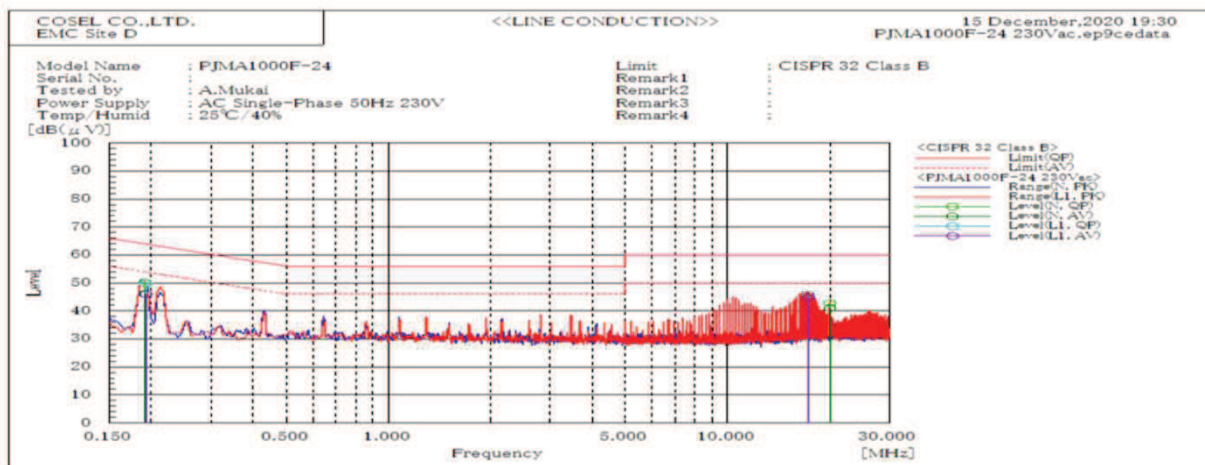


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.192	N	50.1	46.2	64	54	13.9	7.8	Pass	
0.193	L1	49.8	46	63.9	53.9	14.1	7.9	Pass	
17.297	L1	46	44.7	60	50	14	5.3	Pass	
20.001	N	42.8	41.1	60	50	17.2	8.9	Pass	

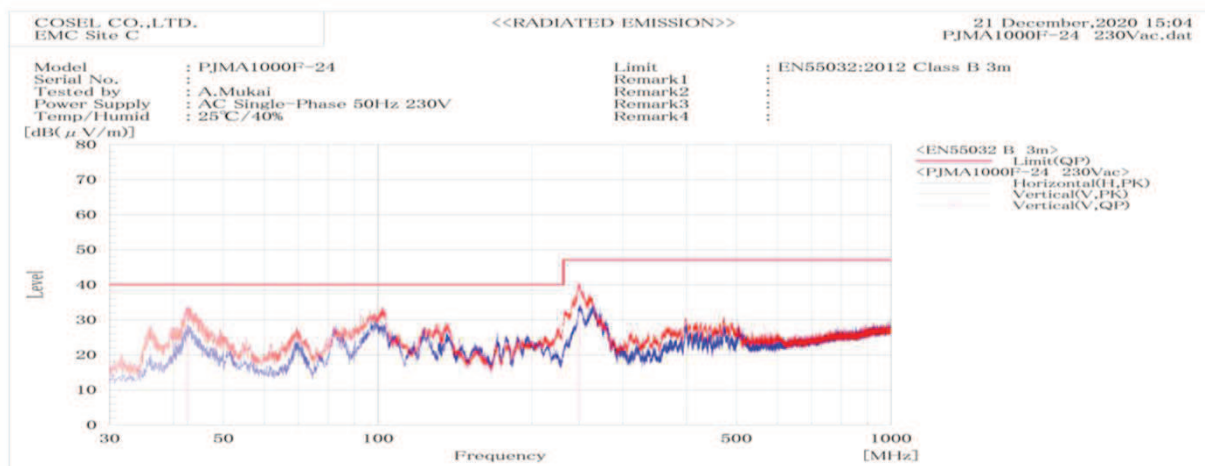


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
42.6	V	Stable	33	40	7	Pass	105.4	104.3	
246.721	V	Stable	39.8	47	7.2	Pass	100	51.8	

DATA SHEET		Date	28-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

### 1. Line conduction

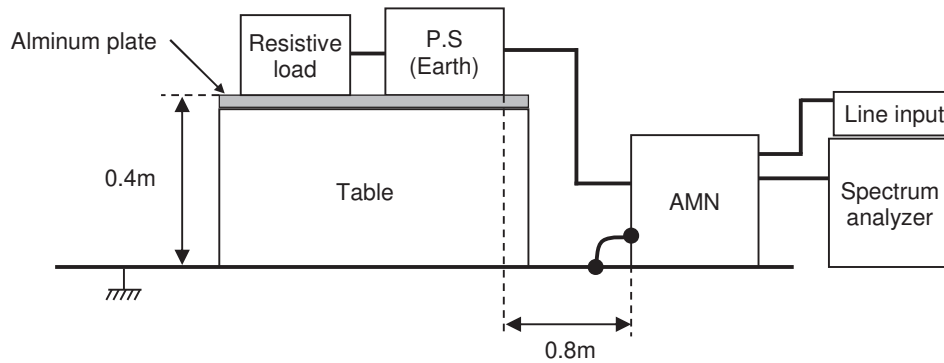

### 2. Radiated emission

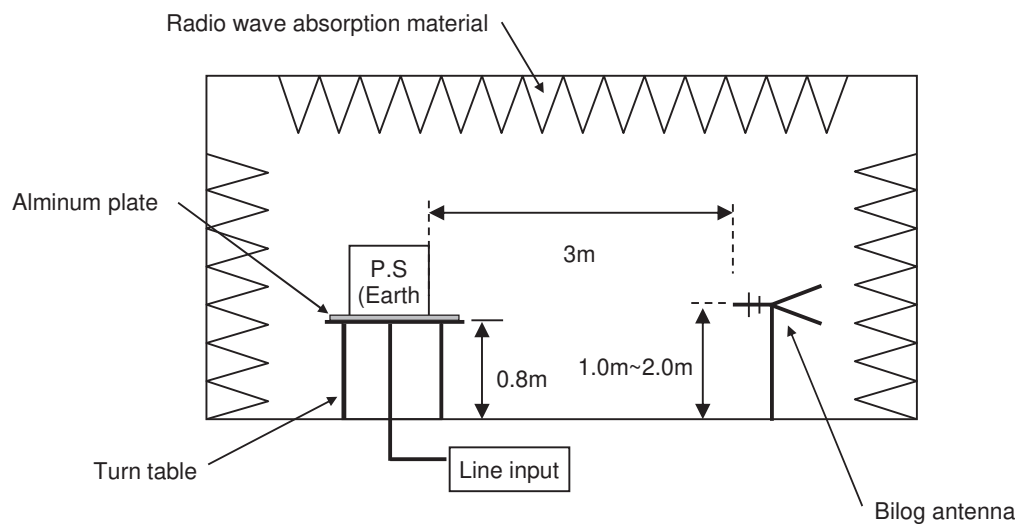

**Conditions**

Test : EMI  
Model Name: PJMA1000F-24

○Photographs of Test Set-Up

**1. LINE CONDUCTION**

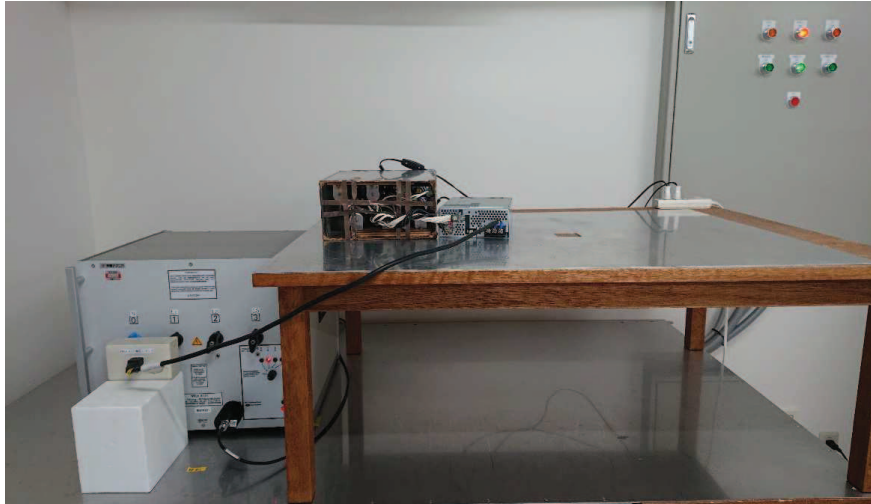


Fig.1 LINE CONDUCTION

○Testing circuitry

**2. RADIATED EMISSION**

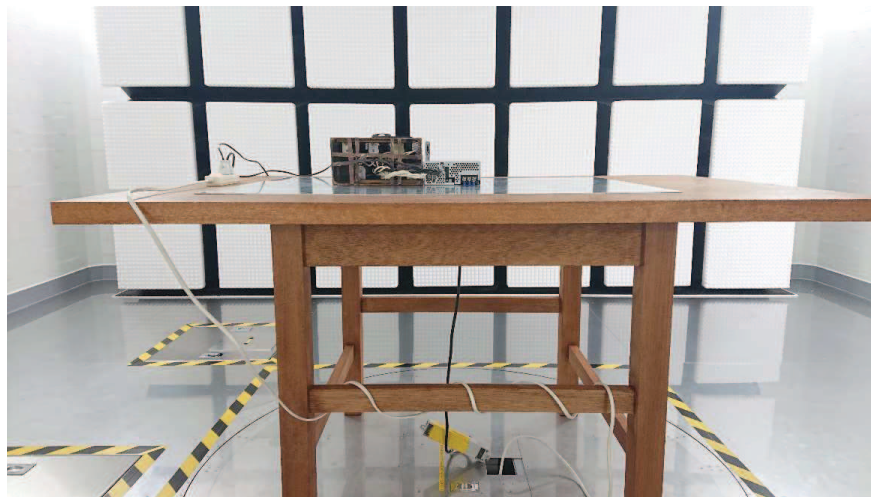


Fig.2 RADIATED EMISSION