



DATA SHEET		Date	29-Sep-22
Model	PJMA1500F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

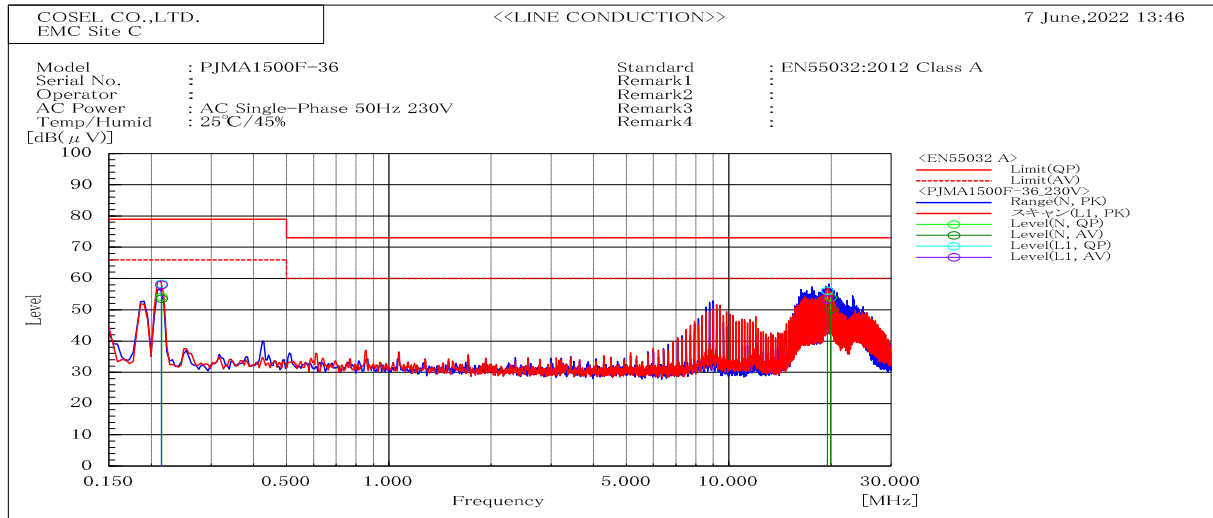


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.214	L1	58.3	58	79	66	20.7	8	Pass	
0.215	N	54.2	53.6	79	66	24.8	12.4	Pass	
19.505	L1	56.1	53.3	73	60	16.9	6.7	Pass	
19.933	N	54	50.2	73	60	19	9.8	Pass	

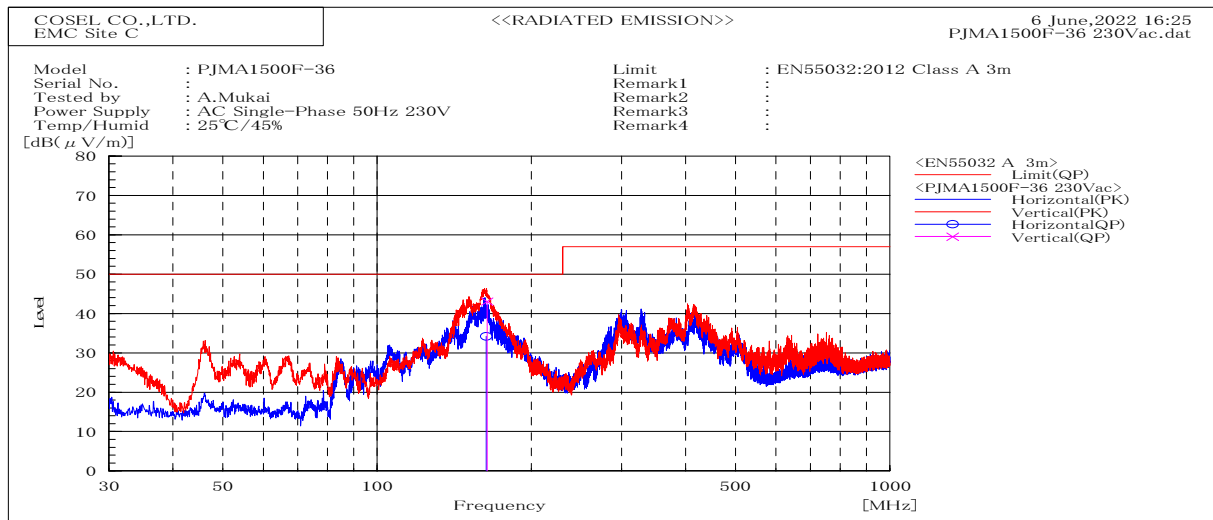


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
163.317	H	Stable	34.2	50	15.8	Pass	199.7	4.4	
163.957	V	Stable	43	50	7	Pass	100	320.2	

DATA SHEET		Date	29-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

1. Line conduction

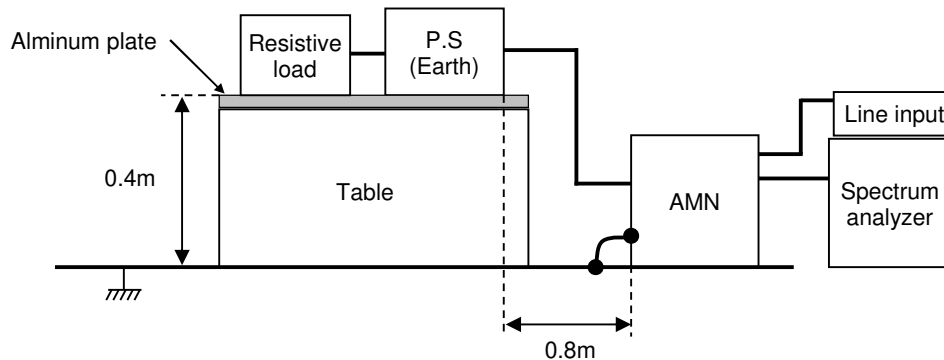

2. Radiated emission

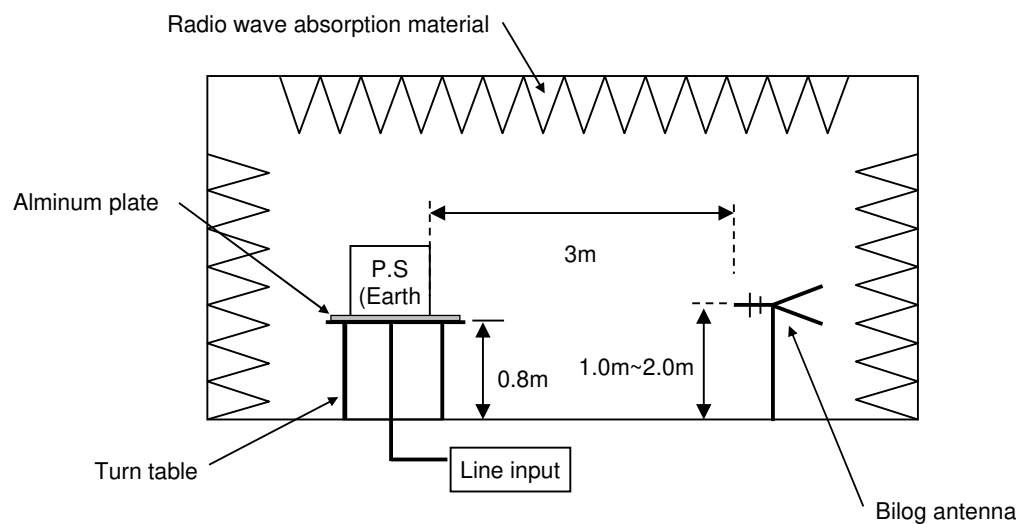

Conditions

Test : EMI
Model Name: PJMA1500F-36

○Photographs of Test Set-Up

1.LINE CONDUCTION



Fig.1 LINE CONDUCTION

2.RADIATED EMISSION

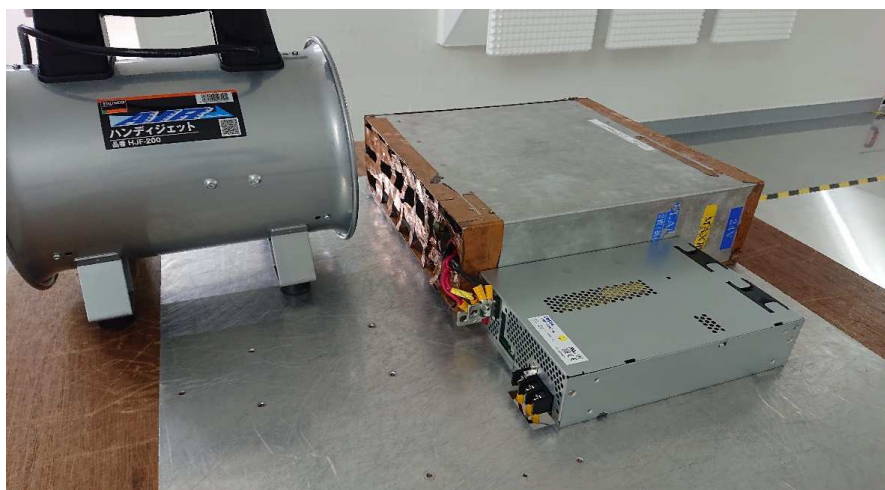


Fig.2 RADIATED EMISSION