



DATA SHEET		Date	21-Sep-21
Model	PJMA300F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

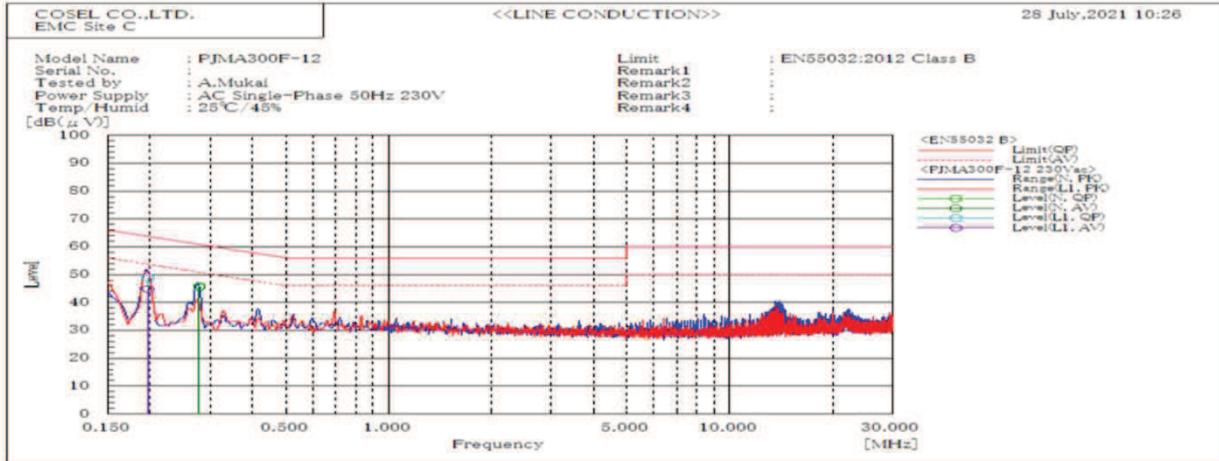


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.197	L1	48.8	44.8	63.7	53.7	14.9	8.9	Pass	
0.279	N	46	45.6	60.8	50.8	14.8	5.2	Pass	

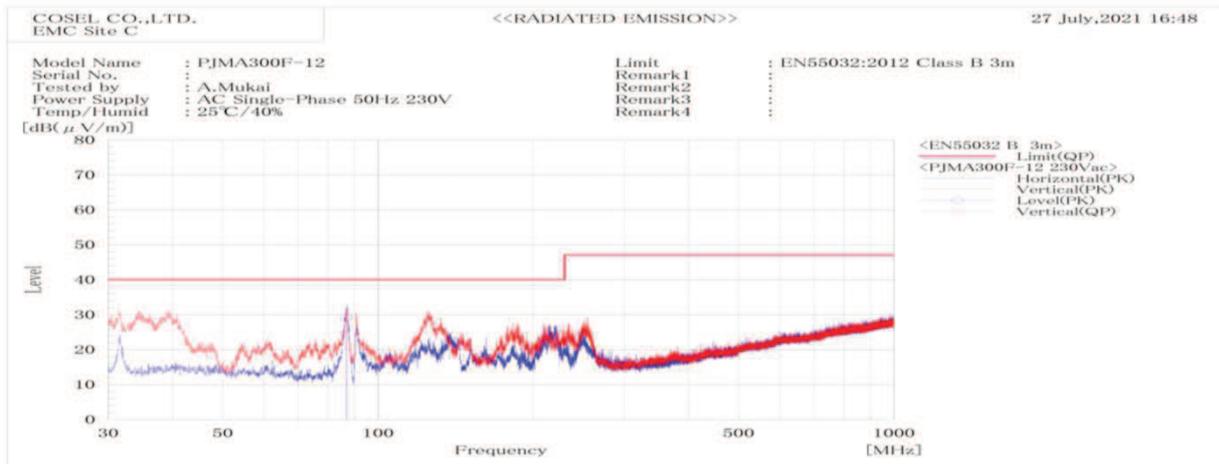


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)		Margin dB		Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP	QP						
86.795	V	Stable	29.4	40	10.6	Pass	100	348.7				
86.926	H	Stable	29	40	11	Pass	199.7	0				

DATA SHEET		Date	21-Sep-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

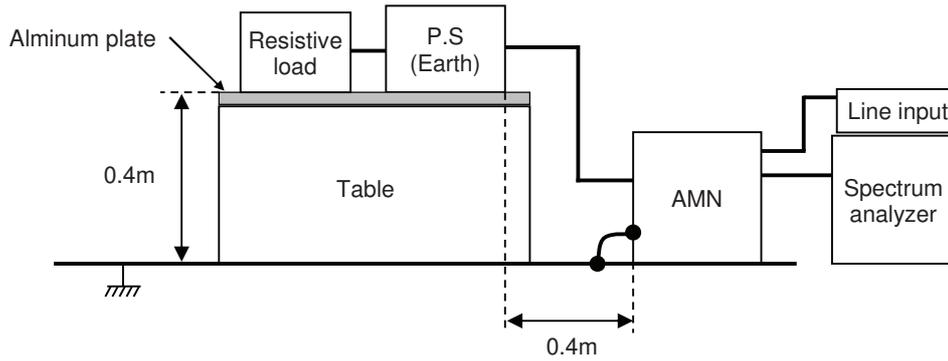

2. Radiated emission

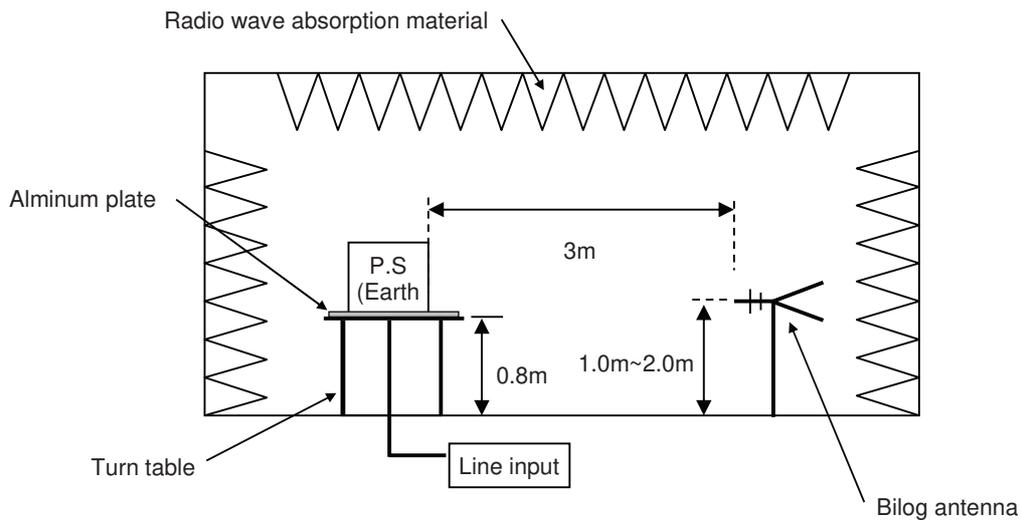

Conditions

Test : EMI
Model Name: PJMA300F-12

○Photographs of Test Set-Up

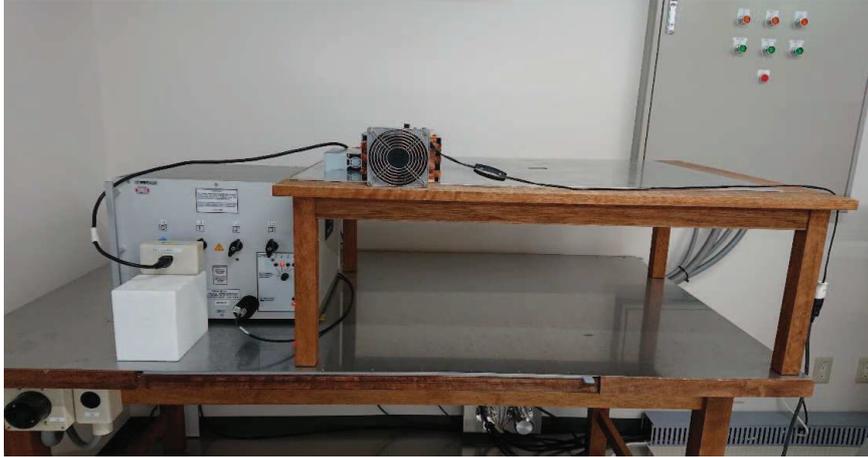
1.LINE CONDUCTION

Fig.1 LINE CONDUCTION

2.RADIATED EMISSION

Fig.2 RADIATED EMISSION