



DATA SHEET		Date	24-Jun-13
Model	PLA100F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

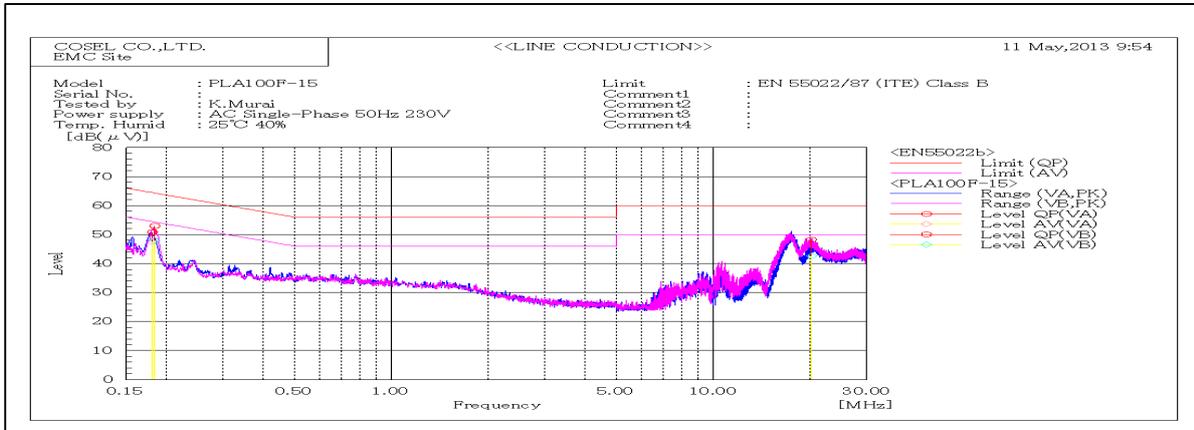


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18095	LA	30.7	27.4	20.1	50.8	47.5	64.4	54.4	13.6	6.9	Pass	
0.18417	LB	32.9	27.9	20.1	53	48	64.3	54.3	11.3	6.3	Pass	
20.20825	LB	27.3	21.7	20.9	48.2	42.6	60	50	11.8	7.4	Pass	

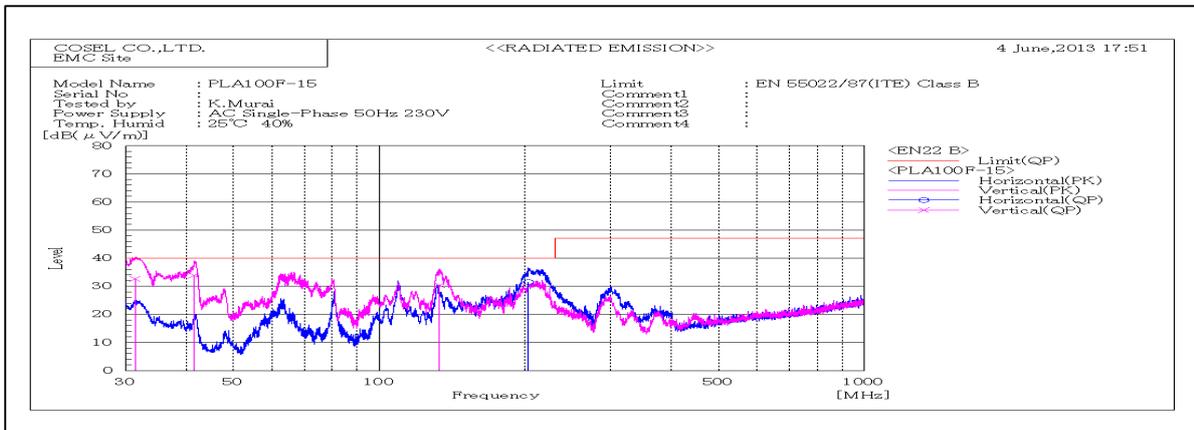

Frequency MHz	Polarization	Stability	Reading	Space Loss dB	Level	Limit	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV)		dB(mW)	dB(mW)					
			QP		QP	QP					
31.365	V	Stable	43.5	-10.9	32.6	40	7.4	Pass	159	58	
41.515	V	Stable	46.7	-12.8	33.9	40	6.1	Pass	100	193	
132.8	V	Stable	44.4	-14	30.4	40	9.6	Pass	100	232	
203	H	Stable	43.2	-11.7	31.5	40	8.5	Pass	159	58	

DATA SHEET		Date	24-Jun-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

1. Line conduction

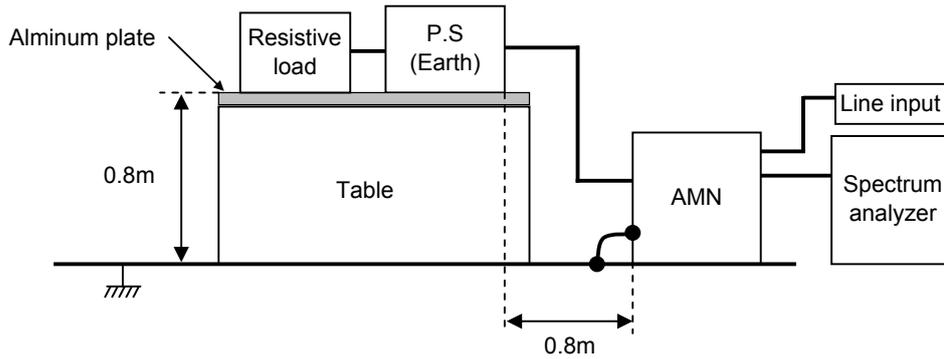

2. Radiated emission

