



## DATA SHEET

Model		PLA150F-24	Date	31-May-13
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	K.Murai

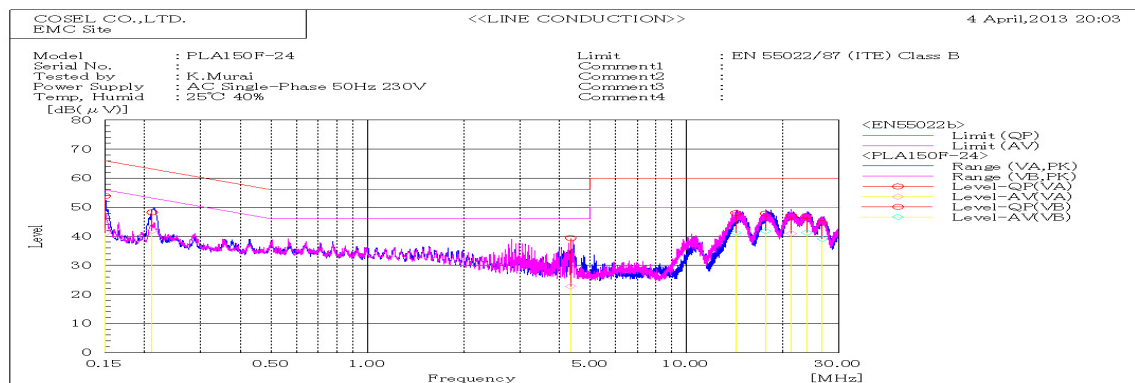


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.15001	LA	33.6	20.9	20.2	60.0	41.1	66	56	12.2	14.9	Pass	
0.21105	LA	28.2	21.8	20.1	60.0	41.9	63.2	53.2	14.9	11.3	Pass	
4.33517	LA	19.2	2.6	20.2	60.0	22.8	56	46	16.6	23.2	Pass	
14.28305	LB	27.3	20.5	20.7	48.0	41.2	60	50	12.0	8.8	Pass	
17.6761	LB	27.0	21.0	20.8	47.8	41.8	60	50	12.2	8.2	Pass	
21.32965	LA	26.1	20.0	21.0	60.0	41.0	60	50	12.9	9.0	Pass	
23.7992	LB	26.1	20.4	20.9	47.0	41.3	60	50	13.0	8.7	Pass	
26.6457	LB	23.8	18.3	20.8	44.6	39.1	60	50	15.4	10.9	Pass	

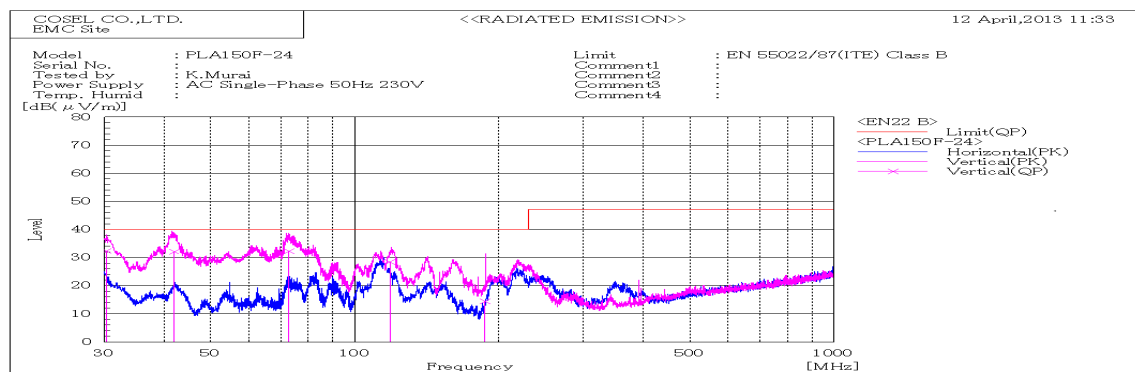

Frequency MHz	Polariz ation	Stabili ty	Readin g dB(μV)		Space Loss dB	Level dB(m V)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP			QP	QP	QP				
30.279	V	Stable	45.9		-13.5	32.4	40	7.6	Pass	104	178	
41.931	V	Stable	48.4		-16.3	32.1	40	7.9	Pass	101	330	
72.869	V	Stable	52.6		-20.3	32.3	40	7.7	Pass	135	342	
118.36	V	Stable	45.6		-17.2	28.4	40	11.6	Pass	104	353	
186.814	V	Stable	30.2		-15.8	14.4	40	25.6	Pass	108	355	

DATA SHEET		Date	31-May-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

## 1. Line conduction

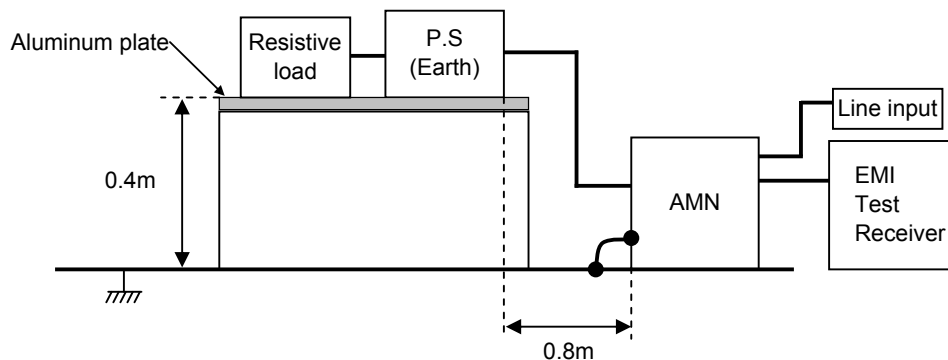

## 2. Radiated emission

