





DATA SHEET		Date	02-Jul-14
Model	PLA15F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

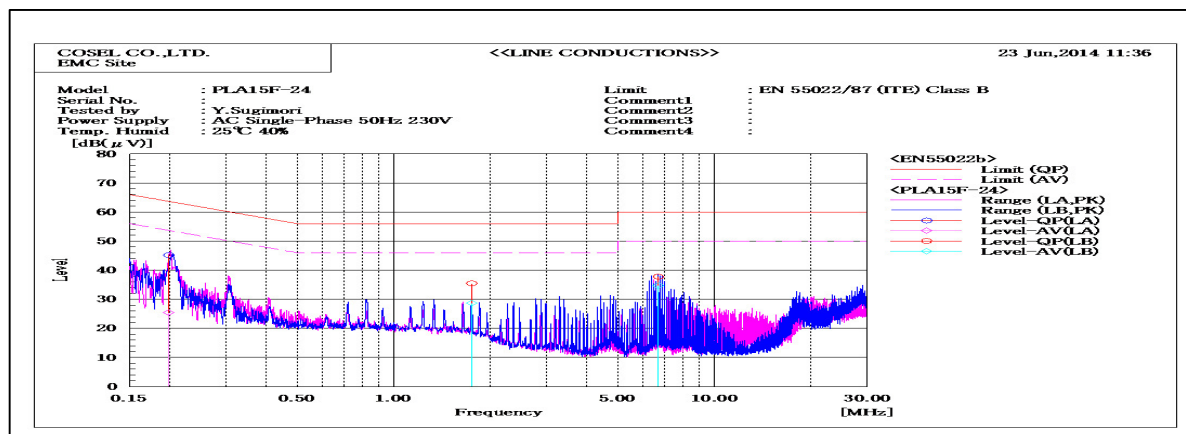


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.19891	LA	38.1	18.4	7.1	45.2	25.5	63.7	53.7	18.5	28.2	Pass	
6.69921	LB	29.2	26.1	8.6	37.8	34.7	60	50	22.2	15.3	Pass	
1.75254	LB	27.8	20.9	7.7	35.5	28.6	56	46	20.5	17.4	Pass	

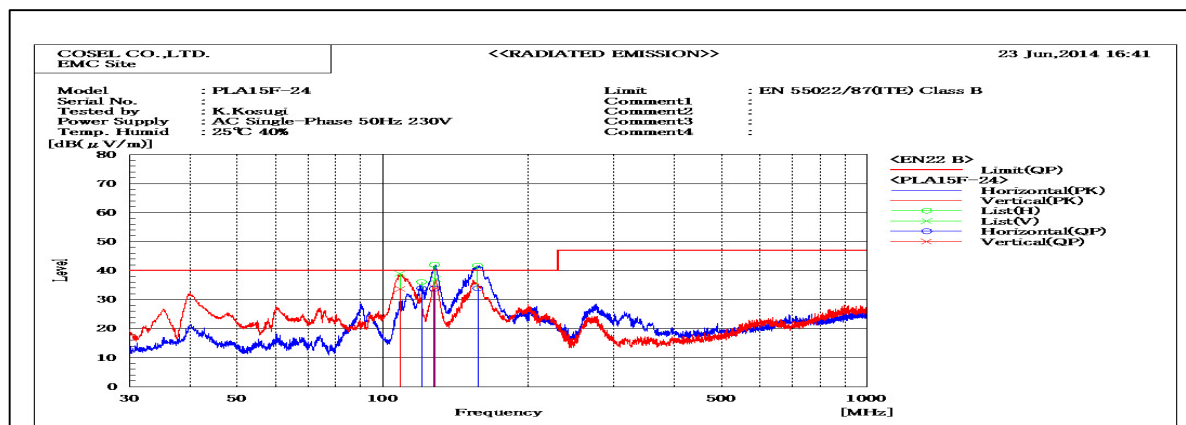

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
127.709	H	45.6	-11.8	33.8	40	6.2	Pass	200	201	
156.947	H	46.7	-12.8	33.9	40	6.1	Pass	192	342	
108.41	V	50.8	-17.1	33.7	40	6.3	Pass	100	11	
120.12	H	46	-12.2	33.8	40	6.2	Pass	200	305	
128.4	V	48.6	-14.7	33.9	40	6.1	Pass	100	311	

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

### 1. Line conduction

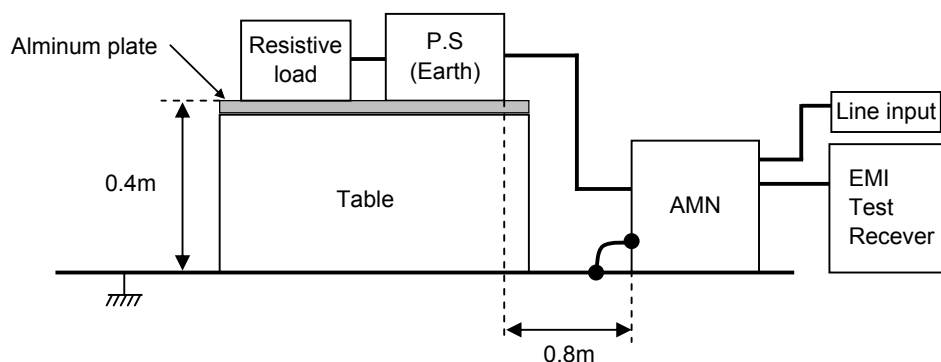

### 2. Radiated emission

