





DATA SHEET		Date	02-Jul-14
Model	PLA30F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

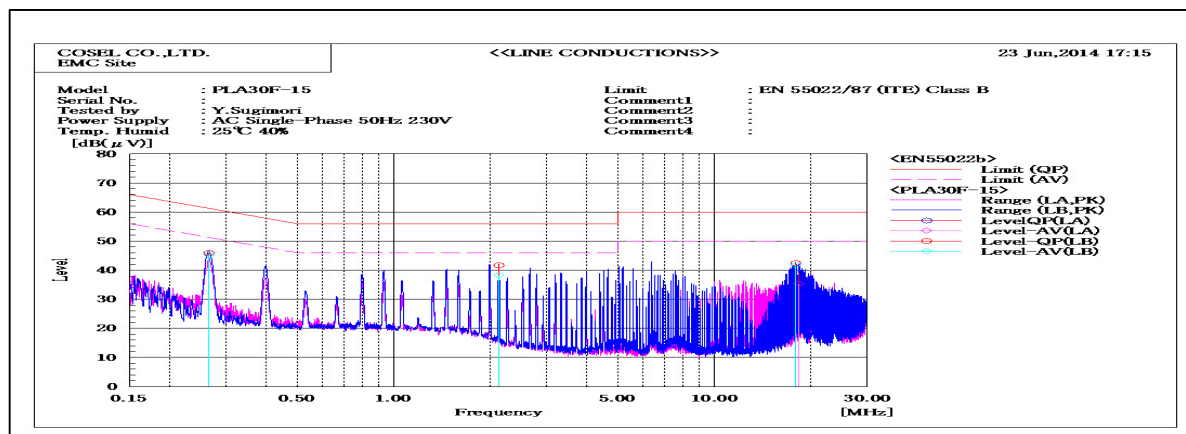


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
17.95925	LB	31.4	30.8	11	42.4	41.8	60	50	17.6	8.2	Pass	
18.3581	LA	27.6	23.8	11.6	39.2	35.4	60	50	20.8	14.6	Pass	
2.12595	LB	34	30.7	7.7	41.7	38.4	56	46	14.3	7.6	Pass	
0.26502	LB	38.7	38.1	7.2	45.9	45.3	61.3	51.3	15.4	6	Pass	

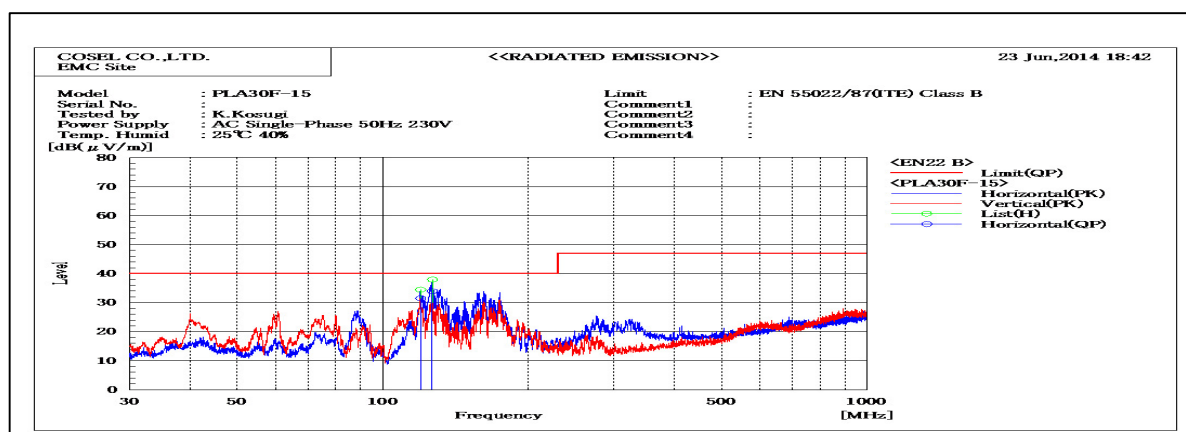

Frequency MHz	Polariz ation	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	AV					
126.458	H	45.8	-11.9	-11.9	33.9	40	6.1	Pass	175	184	
119.7	H	43.7	-12.2	-12.2	31.5	40	8.5	Pass	200	230	

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

1. Line conduction

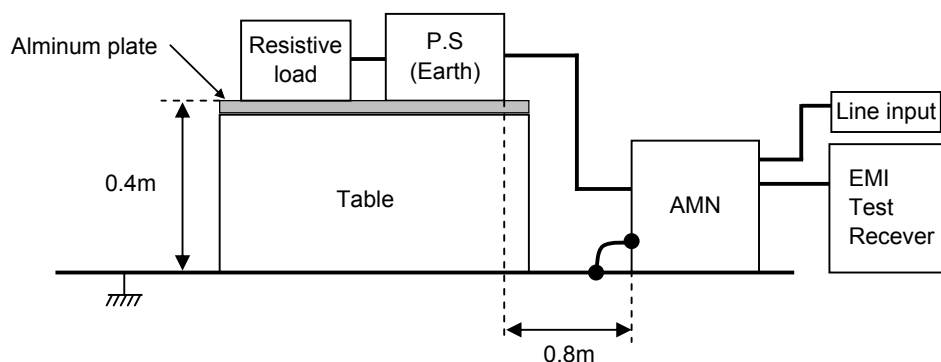

2. Radiated emission

