





DATA SHEET		Date	02-Jul-14
Model	PLA50F-15	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	Y.Sugimori

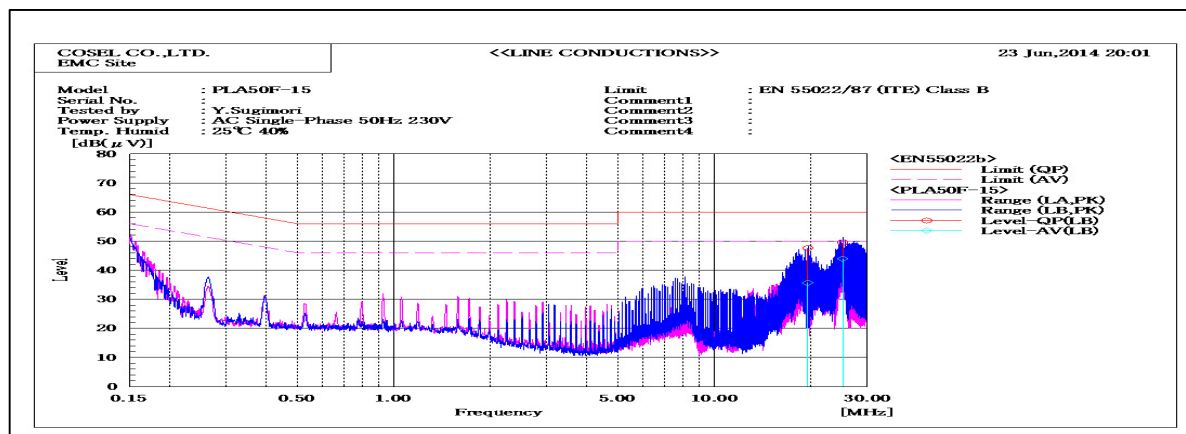


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
19.58935	LB	36.1	24.1	11.5	47.6	35.6	60	50	12.4	14.4	Pass	
25.1599	LB	36.9	31.3	12.6	49.5	43.9	60	50	10.5	6.1	Pass	

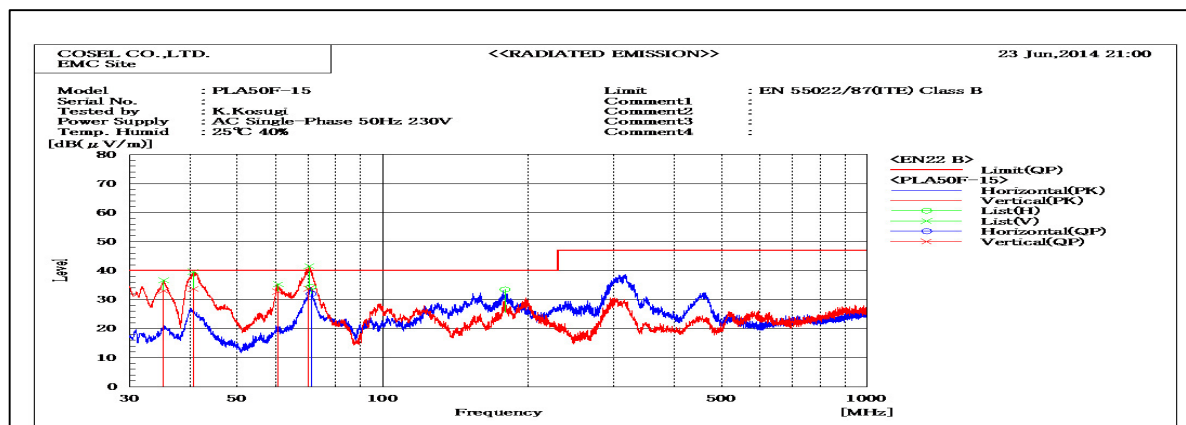

Frequency MHz	Polarization	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	AV					
70.268	V	51.6	-17.8	33.8	40	6.2	Pass	101	302		
40.608	V	47.4	-13.7	33.7	40	6.3	Pass	101	348		
71.102	H	48.3	-16.3	32	40	8	Pass	101	351		
35.29	V	47.9	-14.8	33.1	40	6.9	Pass	101	267		
60.681	V	47.6	-14.8	32.8	40	7.2	Pass	101	341		

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

1. Line conduction

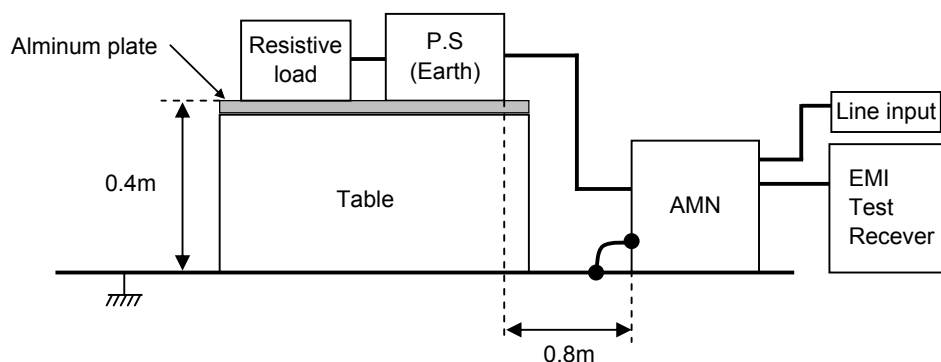

2. Radiated emission

