



DATA SHEET		Date	10-Aug-11
Model	PLA600F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

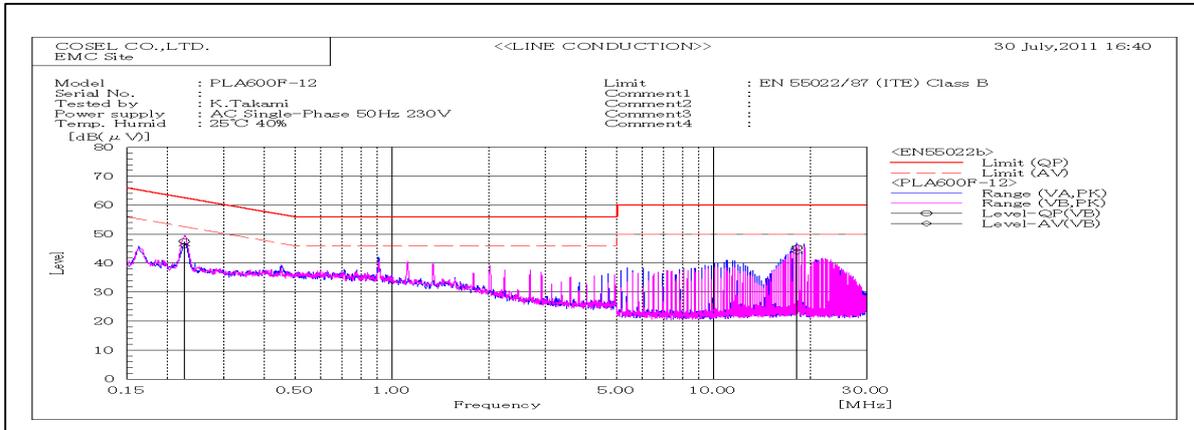


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.22576	VB	37.4	35.9	10.1	47.5	46	62.6	52.6	15.1	6.6	Pass	
18.1638	VB	34.6	33.1	10.8	45.4	43.9	60	50	14.6	6.1	Pass	

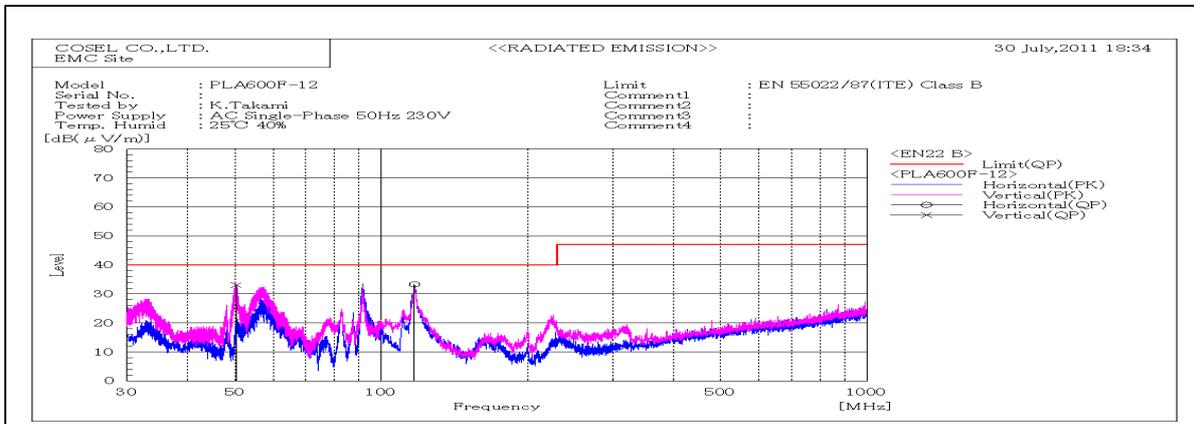

Frequency MHz	Polarization	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
				QP	QP	QP				
50.349	V	53.4	-20.3	33.1	40	6.9	Pass	104	149	
117.2	H	49.5	-16.2	33.3	40	6.7	Pass	154	88	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

1. Line conduction

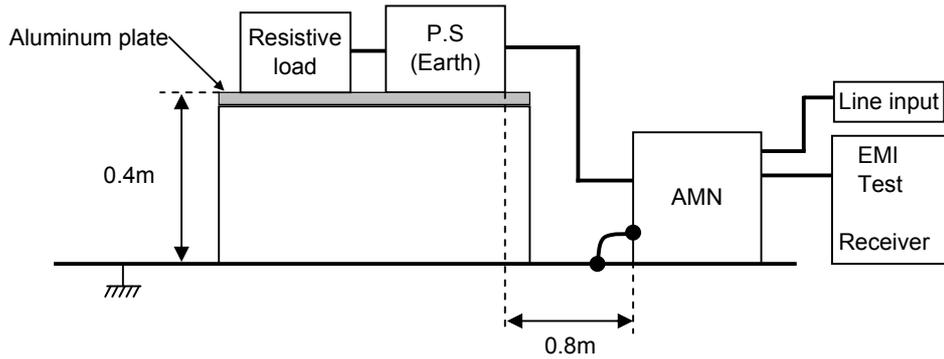

2. Radiated emission

