



DATA SHEET

Model		PLA600F-48	Date	10-Aug-11
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	K.Takami

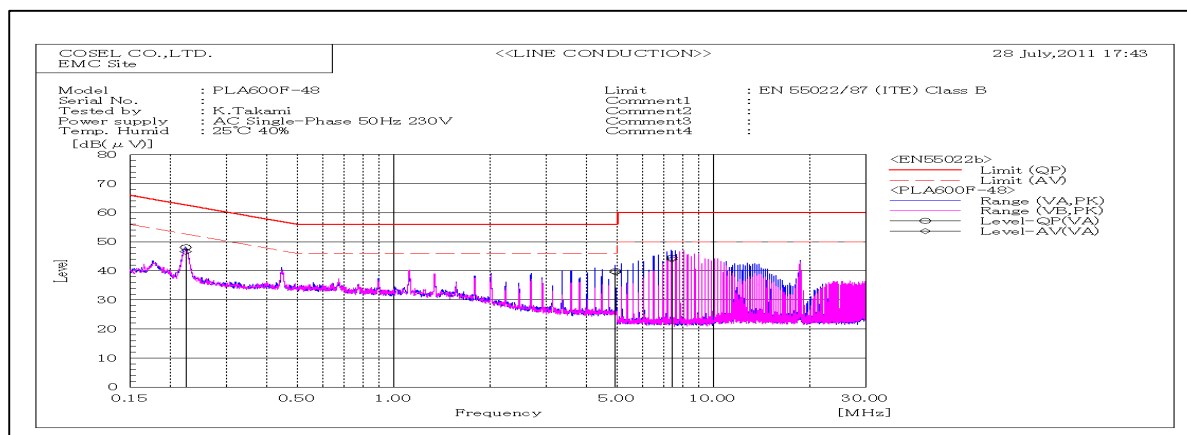


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.22358	VA	38	36.5	10.1	48.1	46.6	62.7	52.7	14.6	6.1	Pass	
4.93289	VA	29.6	29.2	10.3	39.9	39.5	56	46	16.1	6.5	Pass	
7.40067	VA	34.1	33.6	10.4	44.5	44	60	50	15.5	6	Pass	

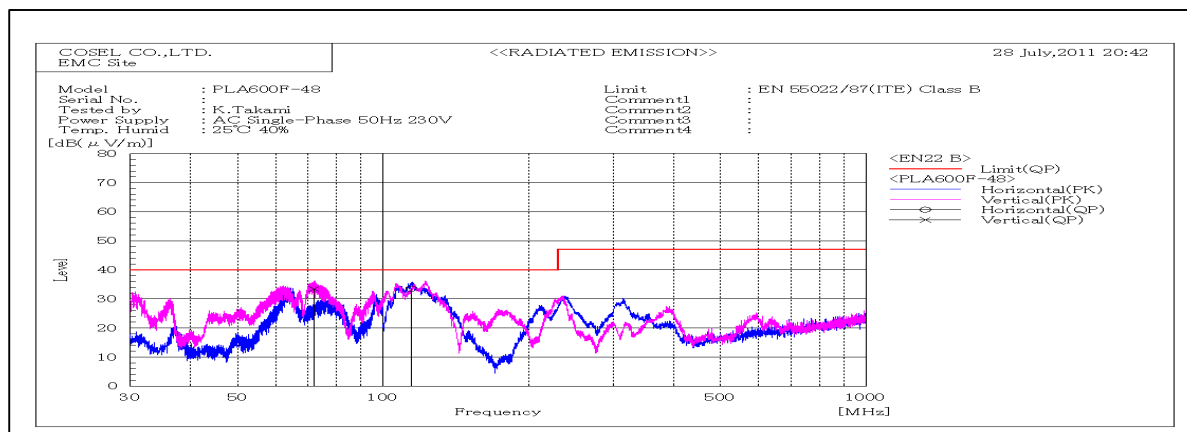

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
				QP	QP					
72.001	V	58.7	-25.3	33.4	40	6.6	Pass	153	147	
114.305	H	53.3	-19.8	33.5	40	6.5	Pass	104	306	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

1. Line conduction

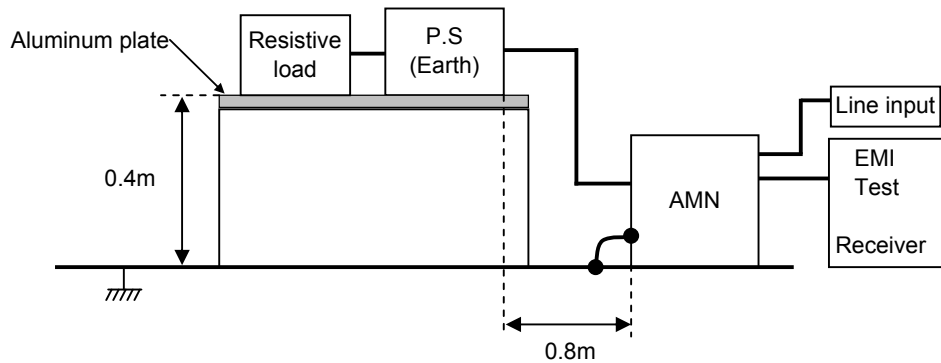

2. Radiated emission

