



DATA SHEET		Date	28-Jun-10
Model	PMA100F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

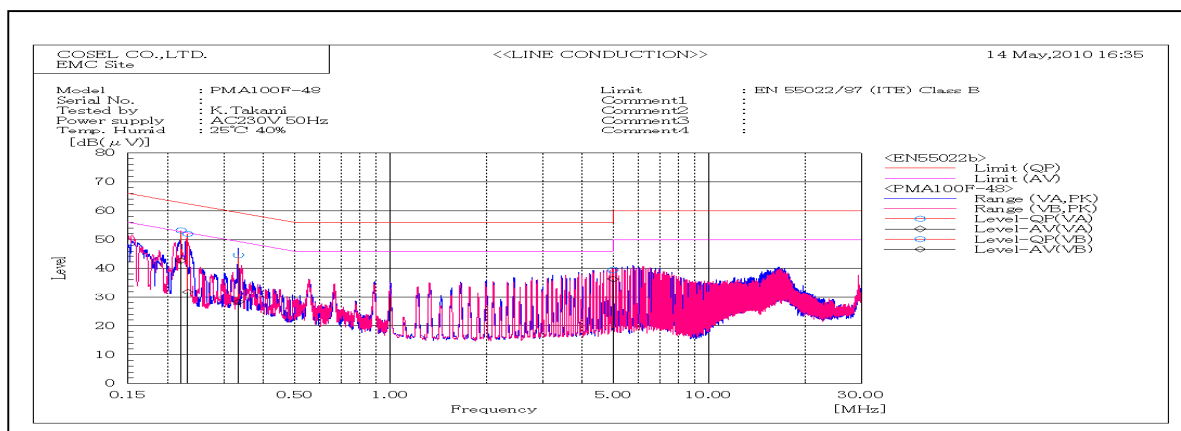

Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.22019		VA	43.1	32.4	10.1	53.2	42.5	62.8	52.8	9.6	10.3	Pass	
0.23117		VB	41.9	21.9	10.1	52	32	62.4	52.4	10.4	20.4	Pass	
0.33338		VA	34.3	18.2	10.1	44.4	28.3	59.4	49.4	15	21.1	Pass	
4.99213		VB	29	26	10.3	39.3	36.3	56	46	16.7	9.7	Pass	

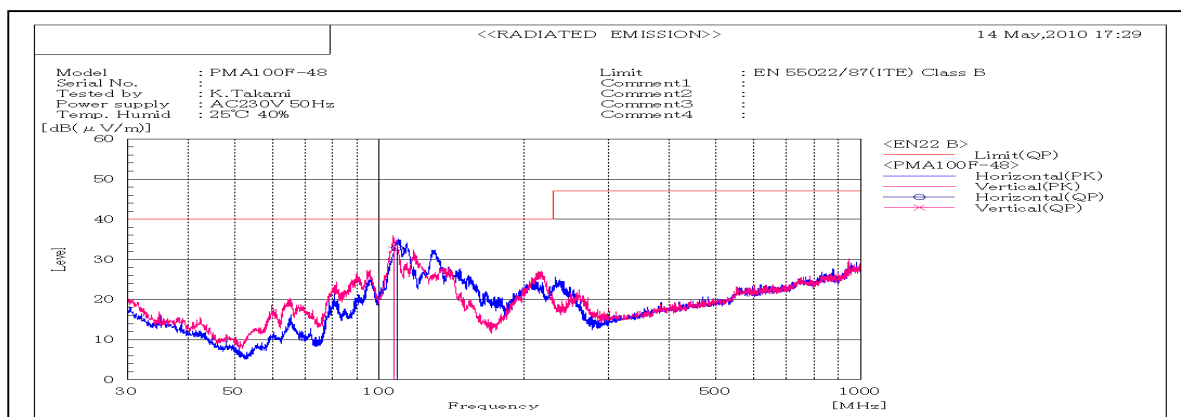

Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
107.426	V	Stable	52.9	-20.4		32.5	40	7.5	Pass	125	6	
109.032	H	Stable	53.1	-20.2		32.9	40	7.1	Pass	142	132	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

