



DATA SHEET		Date	28-Jun-10
Model	PMA15F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

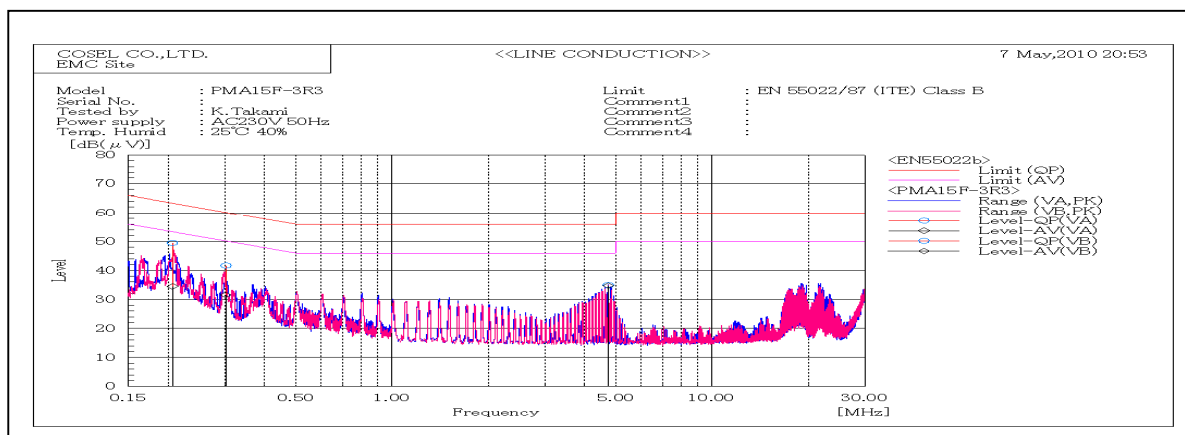

Frequency MHz	Harm	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.2058		VB	39.4	24.4	10.1	49.5	34.5	63.4	53.4	13.9	18.9	Pass	
0.30267		VB	31.7	21.6	10	41.7	31.6	60.2	50.2	18.5	18.6	Pass	
4.74472		VA	24.7	24.4	10.3	35	34.7	56	46	21	11.3	Pass	

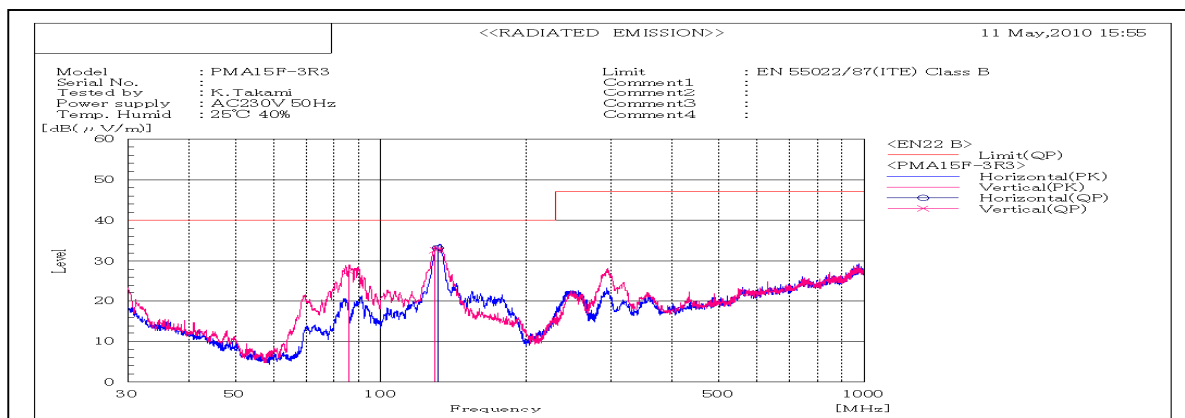

Frequency MHz	Polarization	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
85.864	V	Stable	51	-23.6	27.4	40	12.6	Pass	116	321	
129.63	V	Stable	52.3	-19.6	32.7	40	7.3	Pass	140	310	
131.264	H	Stable	52.8	-19.6	33.2	40	6.8	Pass	156	205	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

