



DATA SHEET		Date	28-Jun-10
Model	PMA60F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

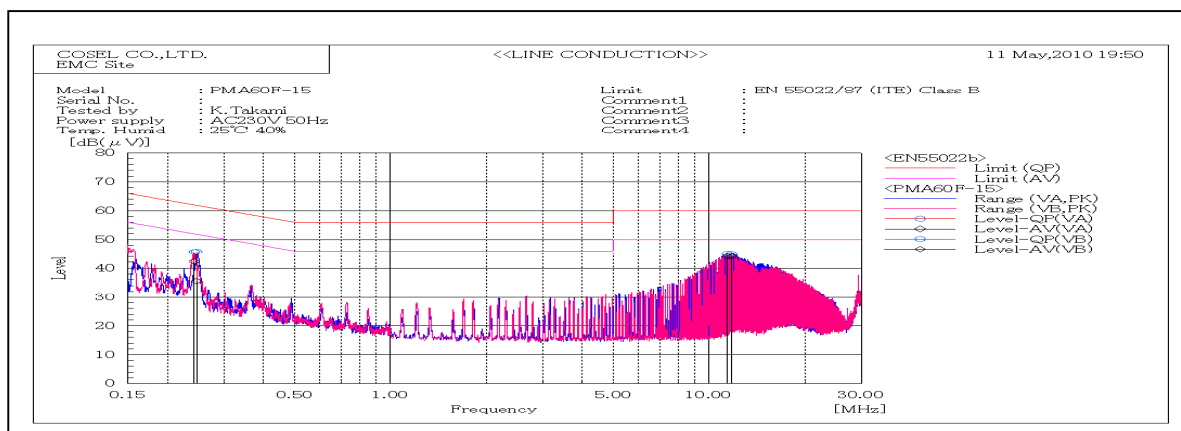

Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.24244		VB	35.5	32.1	10.1	45.6	42.2	62	52	16.4	9.8	Pass	
0.24647		VA	35.6	25.5	10.1	45.7	35.6	61.9	51.9	16.2	16.3	Pass	
11.3991		VA	34.4	33.4	10.6	45	44	60	50	15	6	Pass	
11.7611		VB	34.3	33.3	10.7	45	44	60	50	15	6	Pass	

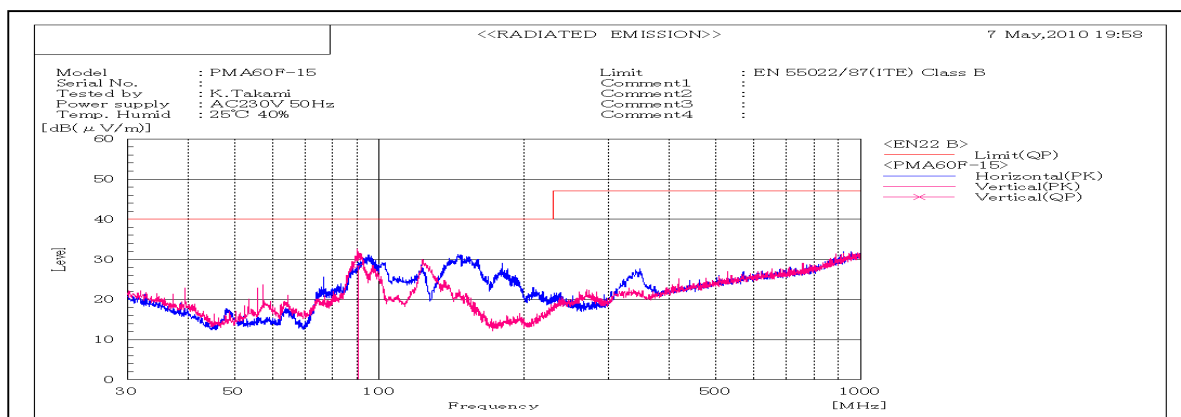

Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
90.273	V	Stable	47.2		-18.8	28.4		40	11.6	154	238	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

