



DATA SHEET		Date	01-Jul-10
Model	PMA60F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

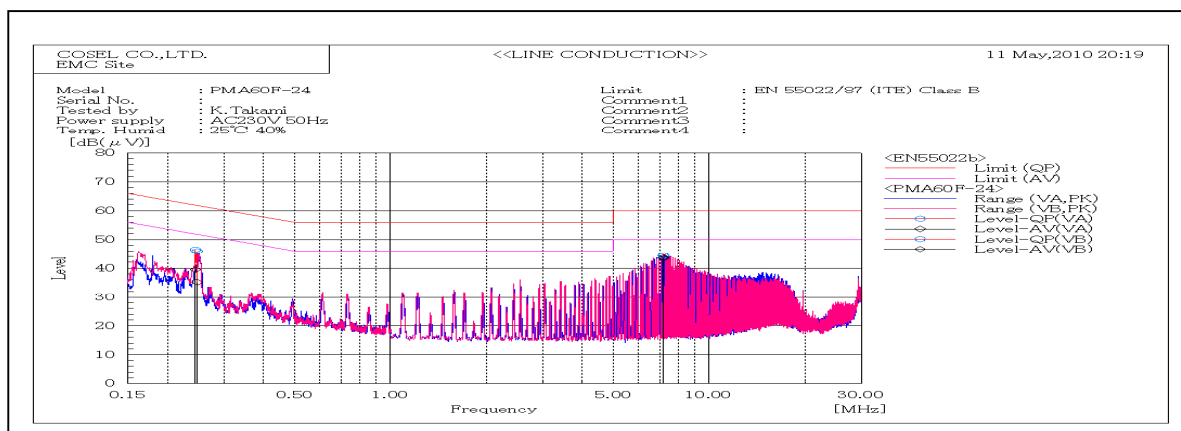

Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.24454		VB	36.4	29.4	10.1	46.5	39.5	61.9	51.9	15.4	12.4	Pass	
0.24754		VA	35.8	25.2	10.1	45.9	35.3	61.8	51.8	15.9	16.5	Pass	
7.19353		VB	34	33.2	10.4	44.4	43.6	60	50	15.6	6.4	Pass	
7.19398		VA	33.7	32.8	10.5	44.2	43.3	60	50	15.8	6.7	Pass	

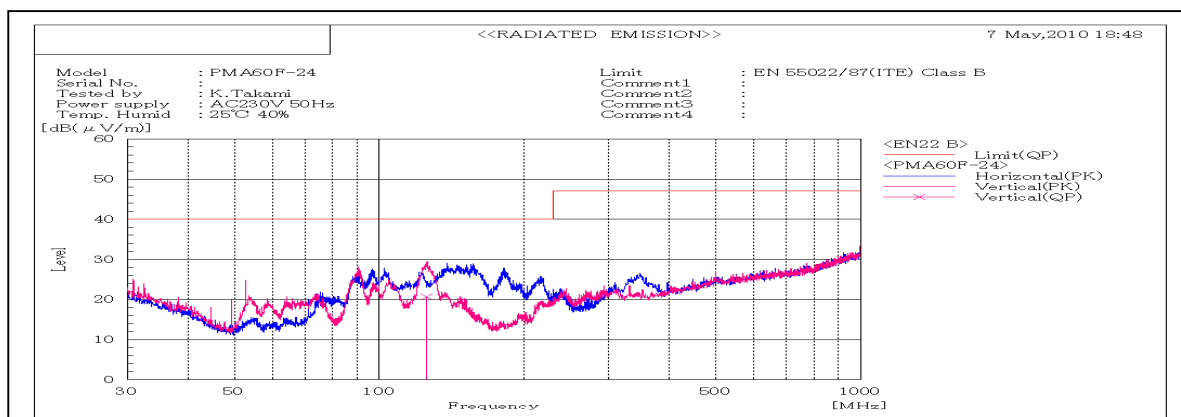


Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
125.368	V	Stable	36.4	-15.7		20.7	40	19.3	Pass	143	40	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

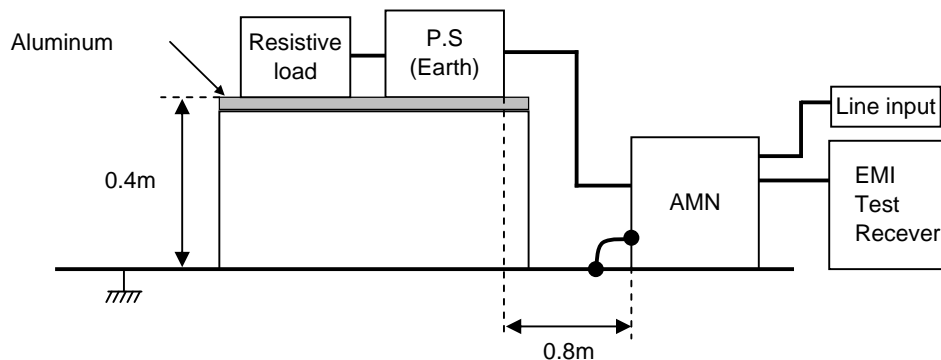

2. Radiated emission

