

TEST DATA OF SNDBS400B15

Regulated DC Power Supply
July 6, 2012

Approved by :

Takahiro Yoneda

Takahiro Yoneda

Design Manager

Prepared by :

Satoshi Kinoshita

Satoshi Kinoshita

Design Engineer

COSEL CO.,LTD.

CONTENTS

1. Input Current (by Input Voltage) ······	1
2. Input Current (by Load Current) ······	2
3. Input Power (by Load Current) ······	3
4. Efficiency (by Input Voltage) ······	4
5. Efficiency (by Load Current) ······	5
6. Line Regulation ······	6
7. Load Regulation ······	7
8. Dynamic Load Response ······	8
9. Ripple Voltage (by Load Current) ······	9
10. Ripple-Noise ······	10
11. Ripple Voltage (by Ambient Temperature) ······	11
12. Ambient Temperature Drift ······	12
13. Output Voltage Accuracy ······	13
14. Time Lapse Drift ······	14
15. Rise and Fall Time ······	15
16. Minimum Input Voltage for Regulated Output Voltage ······	16
17. Overcurrent Protection ······	17
18. Overvoltage Protection ······	18
19. Figure of Testing Circuitry ······	19

(Final Page 19)

COSEL

Model	SNDBS400B15																																																																																	
Item	Input Current (by Input Voltage)	Temperature Testing Circuitry	25°C Figure A																																																																															
Object	—	—	—																																																																															
1.Graph																																																																																		
<p>The graph plots Input Current [A] on the y-axis (0.0 to 5.0) against Input Voltage [V] on the x-axis (0 to 500). Three curves are shown: Load 100% (triangles), Load 50% (squares), and Load 0% (circles). A slanted line indicates the rated input voltage range.</p> <table border="1"> <thead> <tr> <th>Input Voltage [V]</th> <th>Load 0% [A]</th> <th>Load 50% [A]</th> <th>Load 100% [A]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>50</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>100</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>150</td><td>0.004</td><td>0.004</td><td>0.004</td></tr> <tr><td>165</td><td>0.021</td><td>1.380</td><td>2.892</td></tr> <tr><td>170</td><td>0.021</td><td>1.337</td><td>2.808</td></tr> <tr><td>180</td><td>0.021</td><td>1.259</td><td>2.637</td></tr> <tr><td>200</td><td>0.020</td><td>1.130</td><td>2.358</td></tr> <tr><td>250</td><td>0.020</td><td>0.909</td><td>1.875</td></tr> <tr><td>280</td><td>0.020</td><td>0.816</td><td>1.676</td></tr> <tr><td>300</td><td>0.019</td><td>0.765</td><td>1.565</td></tr> <tr><td>350</td><td>0.020</td><td>0.663</td><td>1.350</td></tr> <tr><td>400</td><td>0.020</td><td>0.588</td><td>1.189</td></tr> <tr><td>420</td><td>0.020</td><td>0.563</td><td>1.137</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]	0	0.000	0.000	0.000	50	0.000	0.000	0.000	100	0.003	0.003	0.003	150	0.004	0.004	0.004	165	0.021	1.380	2.892	170	0.021	1.337	2.808	180	0.021	1.259	2.637	200	0.020	1.130	2.358	250	0.020	0.909	1.875	280	0.020	0.816	1.676	300	0.019	0.765	1.565	350	0.020	0.663	1.350	400	0.020	0.588	1.189	420	0.020	0.563	1.137	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-						
Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]																																																																															
0	0.000	0.000	0.000																																																																															
50	0.000	0.000	0.000																																																																															
100	0.003	0.003	0.003																																																																															
150	0.004	0.004	0.004																																																																															
165	0.021	1.380	2.892																																																																															
170	0.021	1.337	2.808																																																																															
180	0.021	1.259	2.637																																																																															
200	0.020	1.130	2.358																																																																															
250	0.020	0.909	1.875																																																																															
280	0.020	0.816	1.676																																																																															
300	0.019	0.765	1.565																																																																															
350	0.020	0.663	1.350																																																																															
400	0.020	0.588	1.189																																																																															
420	0.020	0.563	1.137																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
Note: Slanted line shows the range of the rated input voltage.			2.Values																																																																															
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>50</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>100</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>150</td><td>0.004</td><td>0.004</td><td>0.004</td></tr> <tr><td>165</td><td>0.021</td><td>1.380</td><td>2.892</td></tr> <tr><td>170</td><td>0.021</td><td>1.337</td><td>2.808</td></tr> <tr><td>180</td><td>0.021</td><td>1.259</td><td>2.637</td></tr> <tr><td>200</td><td>0.020</td><td>1.130</td><td>2.358</td></tr> <tr><td>250</td><td>0.020</td><td>0.909</td><td>1.875</td></tr> <tr><td>280</td><td>0.020</td><td>0.816</td><td>1.676</td></tr> <tr><td>300</td><td>0.019</td><td>0.765</td><td>1.565</td></tr> <tr><td>350</td><td>0.020</td><td>0.663</td><td>1.350</td></tr> <tr><td>400</td><td>0.020</td><td>0.588</td><td>1.189</td></tr> <tr><td>420</td><td>0.020</td><td>0.563</td><td>1.137</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	50	0.000	0.000	0.000	100	0.003	0.003	0.003	150	0.004	0.004	0.004	165	0.021	1.380	2.892	170	0.021	1.337	2.808	180	0.021	1.259	2.637	200	0.020	1.130	2.358	250	0.020	0.909	1.875	280	0.020	0.816	1.676	300	0.019	0.765	1.565	350	0.020	0.663	1.350	400	0.020	0.588	1.189	420	0.020	0.563	1.137	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-			
Input Voltage [V]		Input Current [A]																																																																																
	Load 0%	Load 50%	Load 100%																																																																															
0	0.000	0.000	0.000																																																																															
50	0.000	0.000	0.000																																																																															
100	0.003	0.003	0.003																																																																															
150	0.004	0.004	0.004																																																																															
165	0.021	1.380	2.892																																																																															
170	0.021	1.337	2.808																																																																															
180	0.021	1.259	2.637																																																																															
200	0.020	1.130	2.358																																																																															
250	0.020	0.909	1.875																																																																															
280	0.020	0.816	1.676																																																																															
300	0.019	0.765	1.565																																																																															
350	0.020	0.663	1.350																																																																															
400	0.020	0.588	1.189																																																																															
420	0.020	0.563	1.137																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															

COSEL

Model	SNDBS400B15																																																							
Item	Input Current (by Load Current)	Temperature Testing Circuitry	25°C Figure A																																																					
Object	—	—	—																																																					
1.Graph	—△— Input Volt. 200V ---□--- Input Volt. 280V ---○--- Input Volt. 400V	2.Values																																																						
<p>Note: Slanted line shows the range of the rated load current.</p>			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.020</td><td>0.020</td><td>0.020</td></tr> <tr><td>4.0</td><td>0.353</td><td>0.261</td><td>0.194</td></tr> <tr><td>8.0</td><td>0.676</td><td>0.493</td><td>0.360</td></tr> <tr><td>12.0</td><td>1.008</td><td>0.730</td><td>0.527</td></tr> <tr><td>16.0</td><td>1.350</td><td>0.971</td><td>0.696</td></tr> <tr><td>20.0</td><td>1.702</td><td>1.219</td><td>0.870</td></tr> <tr><td>24.0</td><td>2.072</td><td>1.476</td><td>1.050</td></tr> <tr><td>27.0</td><td>2.358</td><td>1.676</td><td>1.189</td></tr> <tr><td>29.7</td><td>2.622</td><td>1.856</td><td>1.310</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	0.020	0.020	0.020	4.0	0.353	0.261	0.194	8.0	0.676	0.493	0.360	12.0	1.008	0.730	0.527	16.0	1.350	0.971	0.696	20.0	1.702	1.219	0.870	24.0	2.072	1.476	1.050	27.0	2.358	1.676	1.189	29.7	2.622	1.856	1.310	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																					
0.0	0.020	0.020	0.020																																																					
4.0	0.353	0.261	0.194																																																					
8.0	0.676	0.493	0.360																																																					
12.0	1.008	0.730	0.527																																																					
16.0	1.350	0.971	0.696																																																					
20.0	1.702	1.219	0.870																																																					
24.0	2.072	1.476	1.050																																																					
27.0	2.358	1.676	1.189																																																					
29.7	2.622	1.856	1.310																																																					
--	-	-	-																																																					
--	-	-	-																																																					

COSEL


Model	SNDBS400B15																																																					
Item	Input Power (by Load Current)																																																					
Object																																																						
1.Graph																																																						
			2. Values																																																			
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>4.1</td><td>5.6</td><td>8.2</td></tr> <tr> <td>4.0</td><td>70.4</td><td>73.1</td><td>77.6</td></tr> <tr> <td>8.0</td><td>135.0</td><td>138.0</td><td>144.1</td></tr> <tr> <td>12.0</td><td>201.6</td><td>204.2</td><td>211.0</td></tr> <tr> <td>16.0</td><td>269.8</td><td>271.9</td><td>278.6</td></tr> <tr> <td>20.0</td><td>340.1</td><td>341.3</td><td>348.0</td></tr> <tr> <td>24.0</td><td>414.0</td><td>413.3</td><td>420.0</td></tr> <tr> <td>27.0</td><td>471.0</td><td>468.7</td><td>476.0</td></tr> <tr> <td>29.7</td><td>524.0</td><td>519.6</td><td>524.0</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	4.1	5.6	8.2	4.0	70.4	73.1	77.6	8.0	135.0	138.0	144.1	12.0	201.6	204.2	211.0	16.0	269.8	271.9	278.6	20.0	340.1	341.3	348.0	24.0	414.0	413.3	420.0	27.0	471.0	468.7	476.0	29.7	524.0	519.6	524.0	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	4.1	5.6	8.2																																																			
4.0	70.4	73.1	77.6																																																			
8.0	135.0	138.0	144.1																																																			
12.0	201.6	204.2	211.0																																																			
16.0	269.8	271.9	278.6																																																			
20.0	340.1	341.3	348.0																																																			
24.0	414.0	413.3	420.0																																																			
27.0	471.0	468.7	476.0																																																			
29.7	524.0	519.6	524.0																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						

COSEL

Model	SNDBS400B15
Item	Efficiency (by Input Voltage)
Object	_____

Temperature 25°C
 Testing Circuitry Figure A

1.Graph

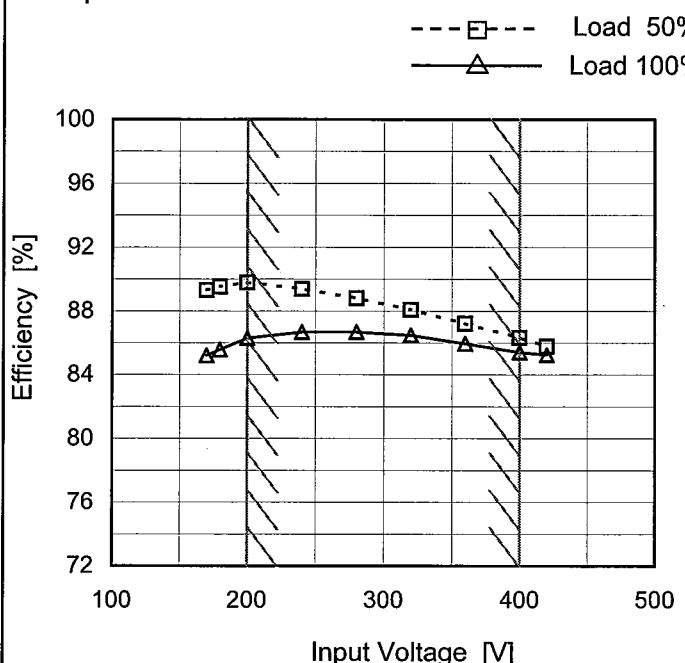

2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
170	89.3	85.2
180	89.5	85.6
200	89.8	86.3
240	89.4	86.7
280	88.8	86.7
320	88.1	86.5
360	87.2	86.0
400	86.3	85.4
420	85.8	85.2

Note: Slanted line shows the range of the rated input voltage.

COSEL

Model	SNDBS400B15																																																					
Item	Efficiency (by Load Current)																																																					
Object	_____																																																					
1.Graph																																																						
<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 200V Input Volt. 280V Input Volt. 400V <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [200V] (%)</th> <th>Efficiency [280V] (%)</th> <th>Efficiency [400V] (%)</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>4.0</td><td>86.0</td><td>82.9</td><td>78.1</td></tr> <tr><td>8.0</td><td>89.5</td><td>87.5</td><td>83.9</td></tr> <tr><td>12.0</td><td>89.8</td><td>88.7</td><td>85.9</td></tr> <tr><td>16.0</td><td>89.4</td><td>88.7</td><td>86.6</td></tr> <tr><td>20.0</td><td>88.5</td><td>88.2</td><td>86.6</td></tr> <tr><td>24.0</td><td>87.3</td><td>87.5</td><td>86.1</td></tr> <tr><td>27.0</td><td>86.3</td><td>86.7</td><td>85.4</td></tr> <tr><td>29.7</td><td>85.3</td><td>86.1</td><td>85.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [200V] (%)	Efficiency [280V] (%)	Efficiency [400V] (%)	0.0	-	-	-	4.0	86.0	82.9	78.1	8.0	89.5	87.5	83.9	12.0	89.8	88.7	85.9	16.0	89.4	88.7	86.6	20.0	88.5	88.2	86.6	24.0	87.3	87.5	86.1	27.0	86.3	86.7	85.4	29.7	85.3	86.1	85.4	--	-	-	-	--	-	-	-	25°C Testing Circuitry Figure A					
Load Current [A]	Efficiency [200V] (%)	Efficiency [280V] (%)	Efficiency [400V] (%)																																																			
0.0	-	-	-																																																			
4.0	86.0	82.9	78.1																																																			
8.0	89.5	87.5	83.9																																																			
12.0	89.8	88.7	85.9																																																			
16.0	89.4	88.7	86.6																																																			
20.0	88.5	88.2	86.6																																																			
24.0	87.3	87.5	86.1																																																			
27.0	86.3	86.7	85.4																																																			
29.7	85.3	86.1	85.4																																																			
--	-	-	-																																																			
--	-	-	-																																																			
2.Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>4.0</td><td>86.0</td><td>82.9</td><td>78.1</td></tr> <tr><td>8.0</td><td>89.5</td><td>87.5</td><td>83.9</td></tr> <tr><td>12.0</td><td>89.8</td><td>88.7</td><td>85.9</td></tr> <tr><td>16.0</td><td>89.4</td><td>88.7</td><td>86.6</td></tr> <tr><td>20.0</td><td>88.5</td><td>88.2</td><td>86.6</td></tr> <tr><td>24.0</td><td>87.3</td><td>87.5</td><td>86.1</td></tr> <tr><td>27.0</td><td>86.3</td><td>86.7</td><td>85.4</td></tr> <tr><td>29.7</td><td>85.3</td><td>86.1</td><td>85.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	-	-	-	4.0	86.0	82.9	78.1	8.0	89.5	87.5	83.9	12.0	89.8	88.7	85.9	16.0	89.4	88.7	86.6	20.0	88.5	88.2	86.6	24.0	87.3	87.5	86.1	27.0	86.3	86.7	85.4	29.7	85.3	86.1	85.4	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	-	-	-																																																			
4.0	86.0	82.9	78.1																																																			
8.0	89.5	87.5	83.9																																																			
12.0	89.8	88.7	85.9																																																			
16.0	89.4	88.7	86.6																																																			
20.0	88.5	88.2	86.6																																																			
24.0	87.3	87.5	86.1																																																			
27.0	86.3	86.7	85.4																																																			
29.7	85.3	86.1	85.4																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						


COSEL

Model	SNDBS400B15
Item	Line Regulation
Object	+15V27A

Temperature 25°C
 Testing Circuitry Figure A

1.Graph

---□--- Load 50%
 —△— Load 100%

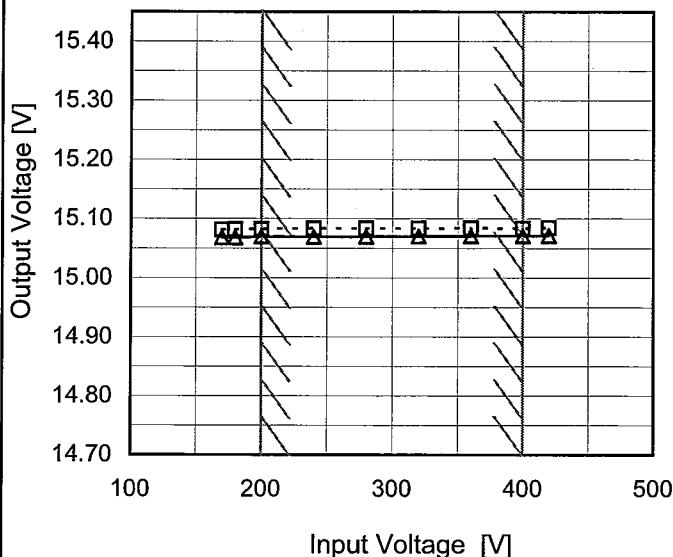



2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
170	15.081	15.068
180	15.082	15.068
200	15.082	15.070
240	15.083	15.070
280	15.083	15.070
320	15.084	15.070
360	15.084	15.071
400	15.084	15.071
420	15.085	15.071



Note: Slanted line shows the range of the rated input voltage.

COSEL

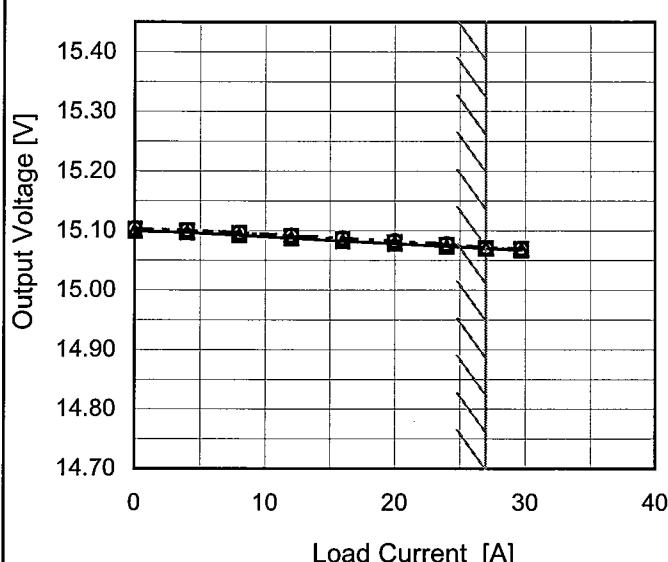Model	SNDBS400B15					
Item	Load Regulation					
Object	+15V27A					
1.Graph						
 <p>Legend:</p> <ul style="list-style-type: none"> — △ — Input Volt. 200V - - □ - - Input Volt. 280V - · ○ - - Input Volt. 400V 						
Note: Slanted line shows the range of the rated load current.						
Temperature 25°C Testing Circuitry Figure A						
2.Values						
Load Current [A]	Output Voltage [V]					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]			
0.0	15.100	15.103	15.104			
4.0	15.097	15.100	15.101			
8.0	15.092	15.095	15.097			
12.0	15.087	15.091	15.092			
16.0	15.083	15.085	15.087			
20.0	15.078	15.080	15.082			
24.0	15.073	15.076	15.078			
27.0	15.070	15.070	15.071			
29.7	15.067	15.069	15.070			
--	-	-	-			
--	-	-	-			

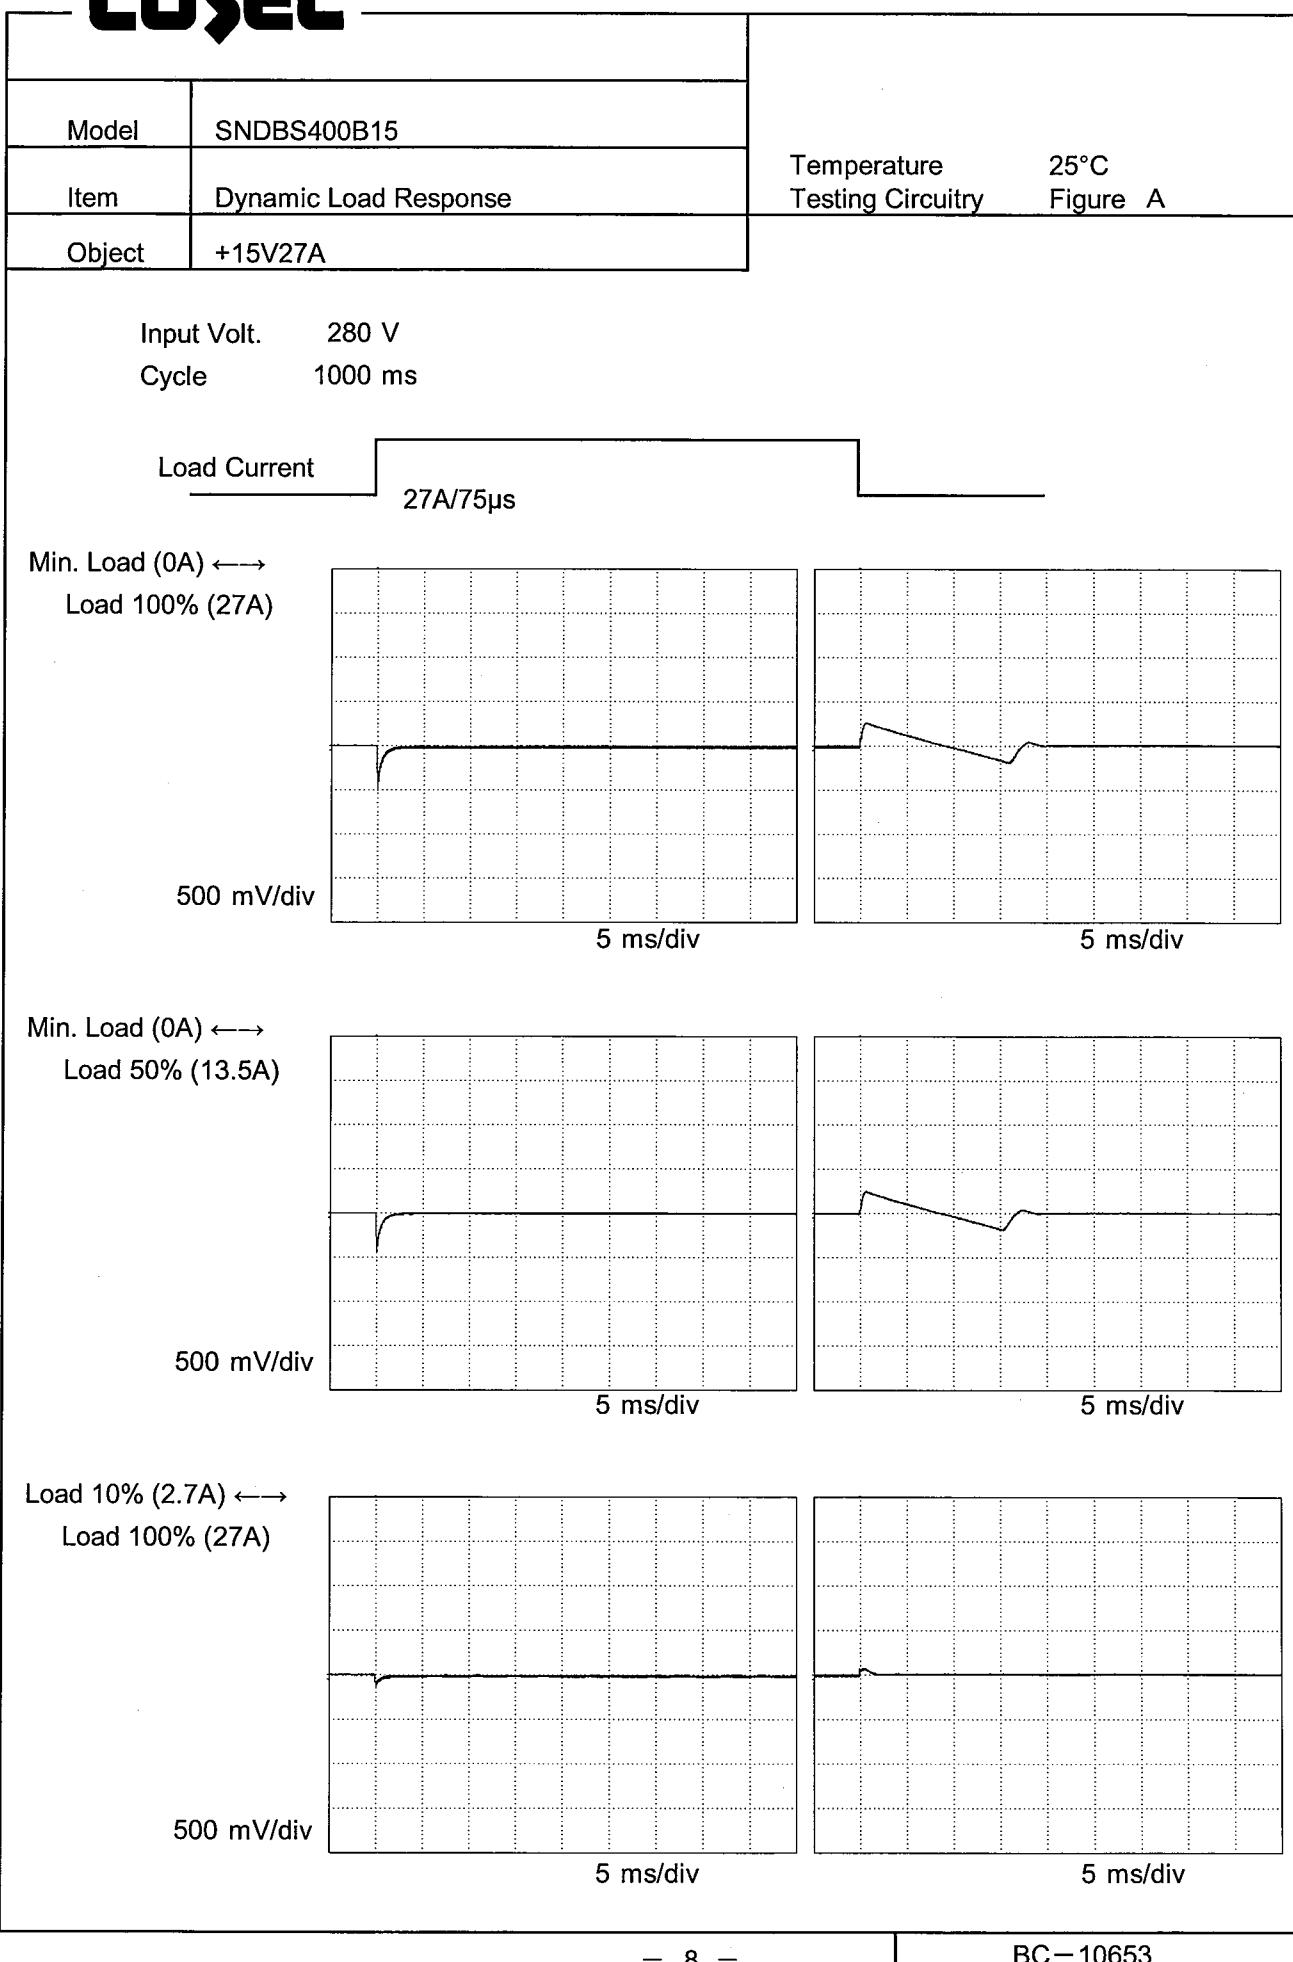COSEL

COSEL

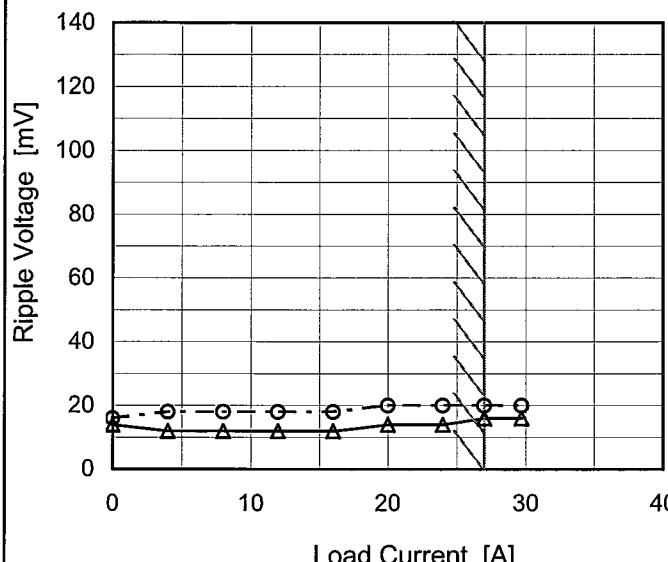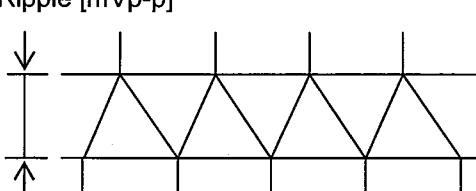Model	SNDBS400B15																																							
Item	Ripple Voltage (by Load Current)	Temperature 25°C Testing Circuitry Figure B																																						
Object	+15V27A																																							
1.Graph																																								
<p style="text-align: center;"> Input Volt. 200V Input Volt. 400V </p> 																																								
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> 																																								
<p>Fig.Complex Ripple Wave Form</p>																																								
<p>2.Values</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 200 [V]</th> <th>Input Volt. 400 [V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td> <td>14</td> <td>16</td> </tr> <tr> <td>4.0</td> <td>12</td> <td>18</td> </tr> <tr> <td>8.0</td> <td>12</td> <td>18</td> </tr> <tr> <td>12.0</td> <td>12</td> <td>18</td> </tr> <tr> <td>16.0</td> <td>12</td> <td>18</td> </tr> <tr> <td>20.0</td> <td>14</td> <td>20</td> </tr> <tr> <td>24.0</td> <td>14</td> <td>20</td> </tr> <tr> <td>27.0</td> <td>16</td> <td>20</td> </tr> <tr> <td>29.7</td> <td>16</td> <td>20</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>			Load Current [A]	Ripple Voltage [mV]		Input Volt. 200 [V]	Input Volt. 400 [V]	0.0	14	16	4.0	12	18	8.0	12	18	12.0	12	18	16.0	12	18	20.0	14	20	24.0	14	20	27.0	16	20	29.7	16	20	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 200 [V]	Input Volt. 400 [V]																																						
0.0	14	16																																						
4.0	12	18																																						
8.0	12	18																																						
12.0	12	18																																						
16.0	12	18																																						
20.0	14	20																																						
24.0	14	20																																						
27.0	16	20																																						
29.7	16	20																																						
--	-	-																																						
--	-	-																																						

COSEL


Model	SNDBS400B15																																								
Item	Ripple-Noise	Temperature 25°C Testing Circuitry Figure B																																							
Object	+15V27A																																								
1.Graph																																									
<p>Y-axis: Ripple-Noise [mV] X-axis: Load Current [A]</p> <p>Legend: —△— Input Volt. 200V -○--- Input Volt. 400V </p>		2.Values																																							
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 200 [V]</th> <th>Input Volt. 400 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>20</td><td>22</td></tr> <tr><td>4.0</td><td>18</td><td>24</td></tr> <tr><td>8.0</td><td>20</td><td>26</td></tr> <tr><td>12.0</td><td>20</td><td>28</td></tr> <tr><td>16.0</td><td>22</td><td>28</td></tr> <tr><td>20.0</td><td>24</td><td>28</td></tr> <tr><td>24.0</td><td>26</td><td>30</td></tr> <tr><td>27.0</td><td>28</td><td>30</td></tr> <tr><td>29.7</td><td>28</td><td>32</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 200 [V]	Input Volt. 400 [V]	0.0	20	22	4.0	18	24	8.0	20	26	12.0	20	28	16.0	22	28	20.0	24	28	24.0	26	30	27.0	28	30	29.7	28	32	--	-	-	--	-	-	
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 200 [V]	Input Volt. 400 [V]																																							
0.0	20	22																																							
4.0	18	24																																							
8.0	20	26																																							
12.0	20	28																																							
16.0	22	28																																							
20.0	24	28																																							
24.0	26	30																																							
27.0	28	30																																							
29.7	28	32																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																									
<p>Ripple Noise[mVp-p]</p>																																									
<p>Fig.Complex Ripple Noise Wave Form</p>																																									

COSEL

Model	SNDBS400B15
Item	Ripple Voltage (by Ambient Temp.)
Object	+15V27A

Testing Circuitry Figure B

1.Graph

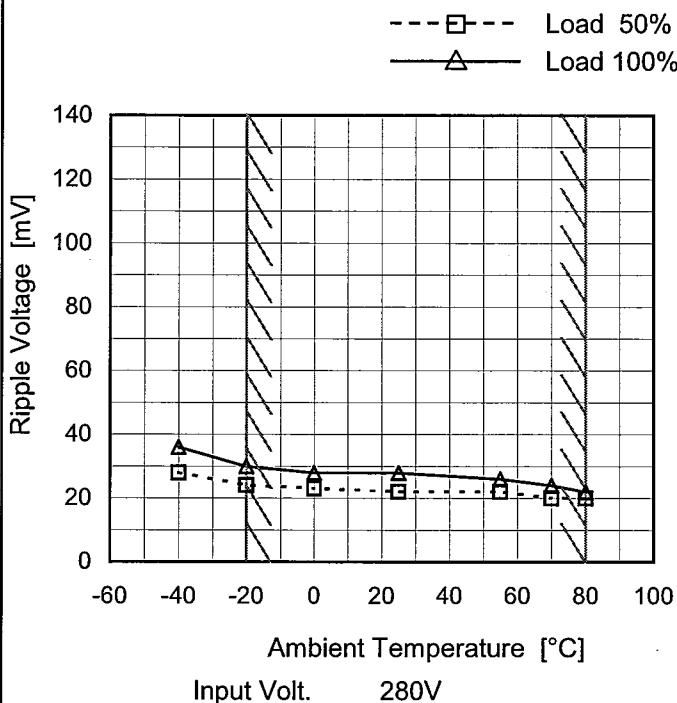

2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	28	36
-20	24	30
0	23	28
25	22	28
55	22	26
70	20	24
80	20	22
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

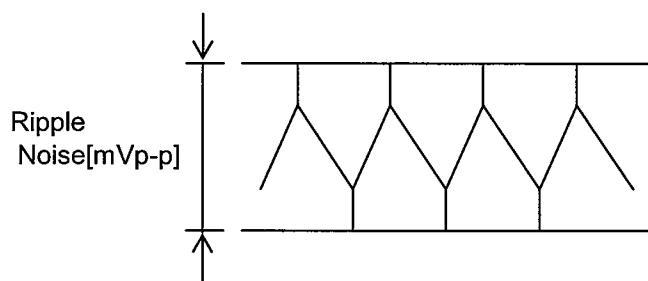
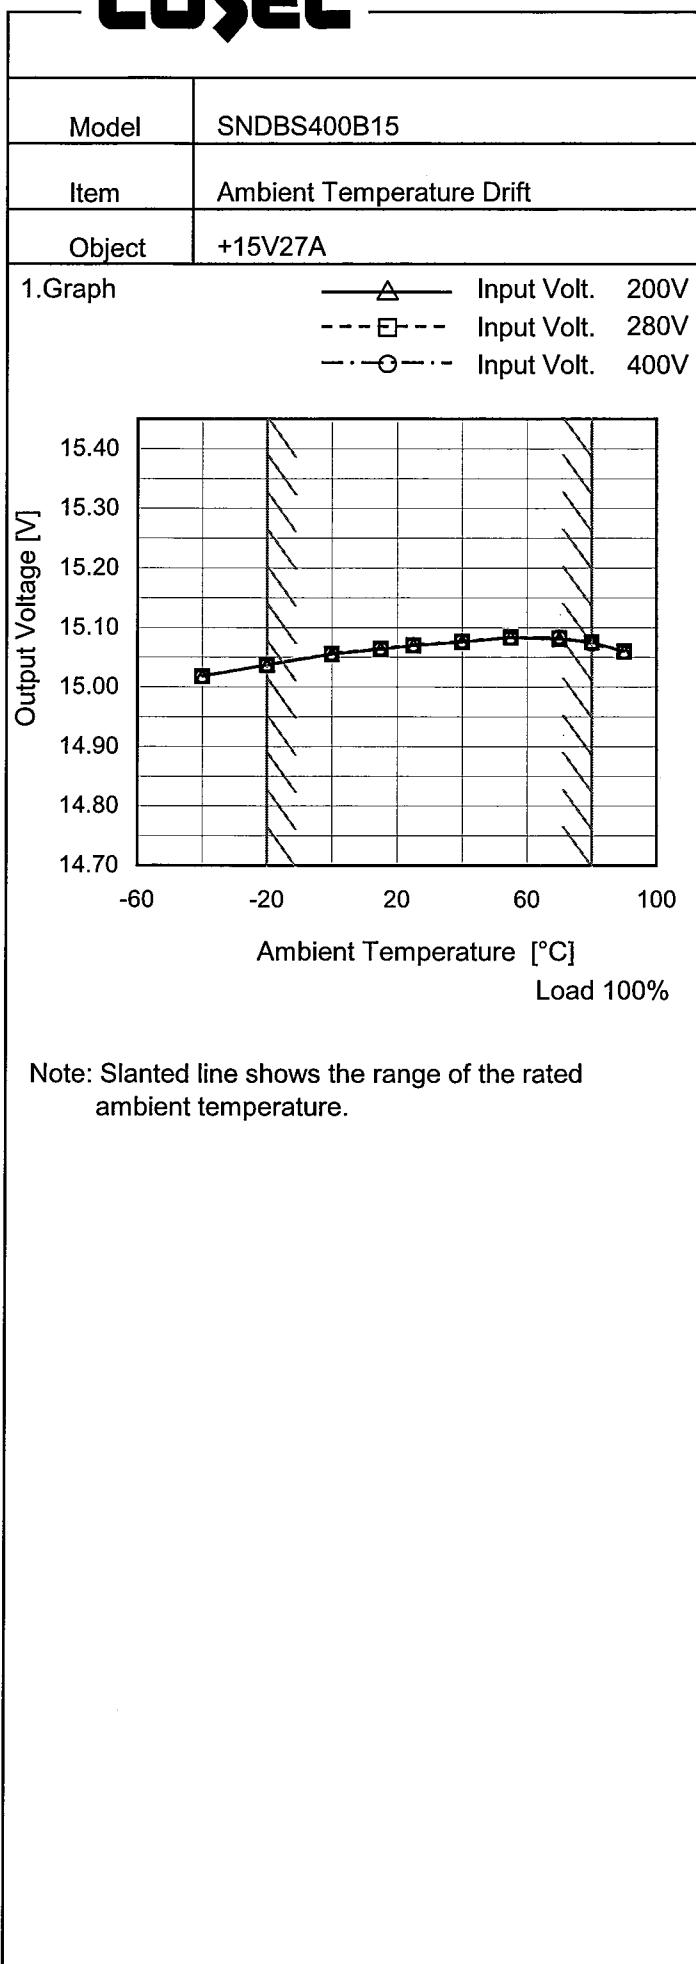


Fig.Complex Ripple Noise Wave Form

COSEL

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
-40	15.018	15.018	15.018
-20	15.037	15.037	15.037
0	15.056	15.056	15.056
15	15.064	15.064	15.065
25	15.070	15.070	15.071
40	15.076	15.077	15.077
55	15.083	15.084	15.083
70	15.081	15.082	15.084
80	15.076	15.075	15.073
90	15.060	15.060	15.059
--	-	-	-



Model	SNDBS400B15	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+15V27A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20 - 80°C

Input Voltage : 200 - 400V

Load Current : 0 - 27A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	55	400	0	15.134	±41	±0.3
Minimum Voltage	-20	200	27	15.053		

COSEL

Model	SNDBS400B15
Item	Time Lapse Drift
Object	+15V27A


Temperature 25°C
 Testing Circuitry Figure A

1.Graph

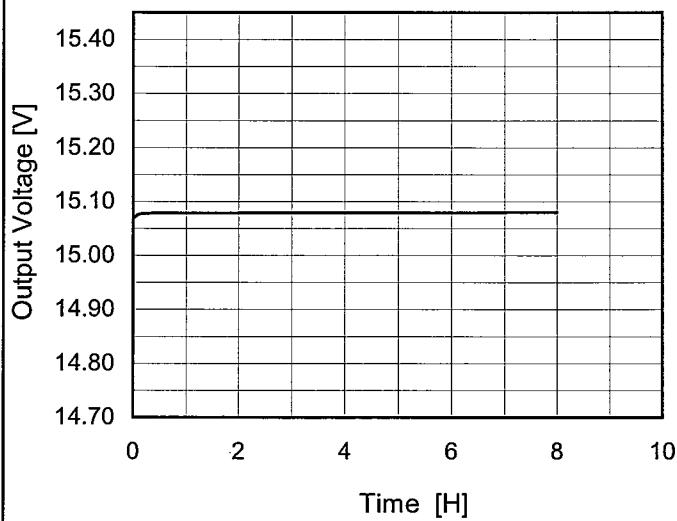

2.Values


Time since start [H]	Output Voltage [V]
0.0	15.071
0.5	15.079
1.0	15.079
2.0	15.079
3.0	15.080
4.0	15.079
5.0	15.079
6.0	15.079
7.0	15.080
8.0	15.081

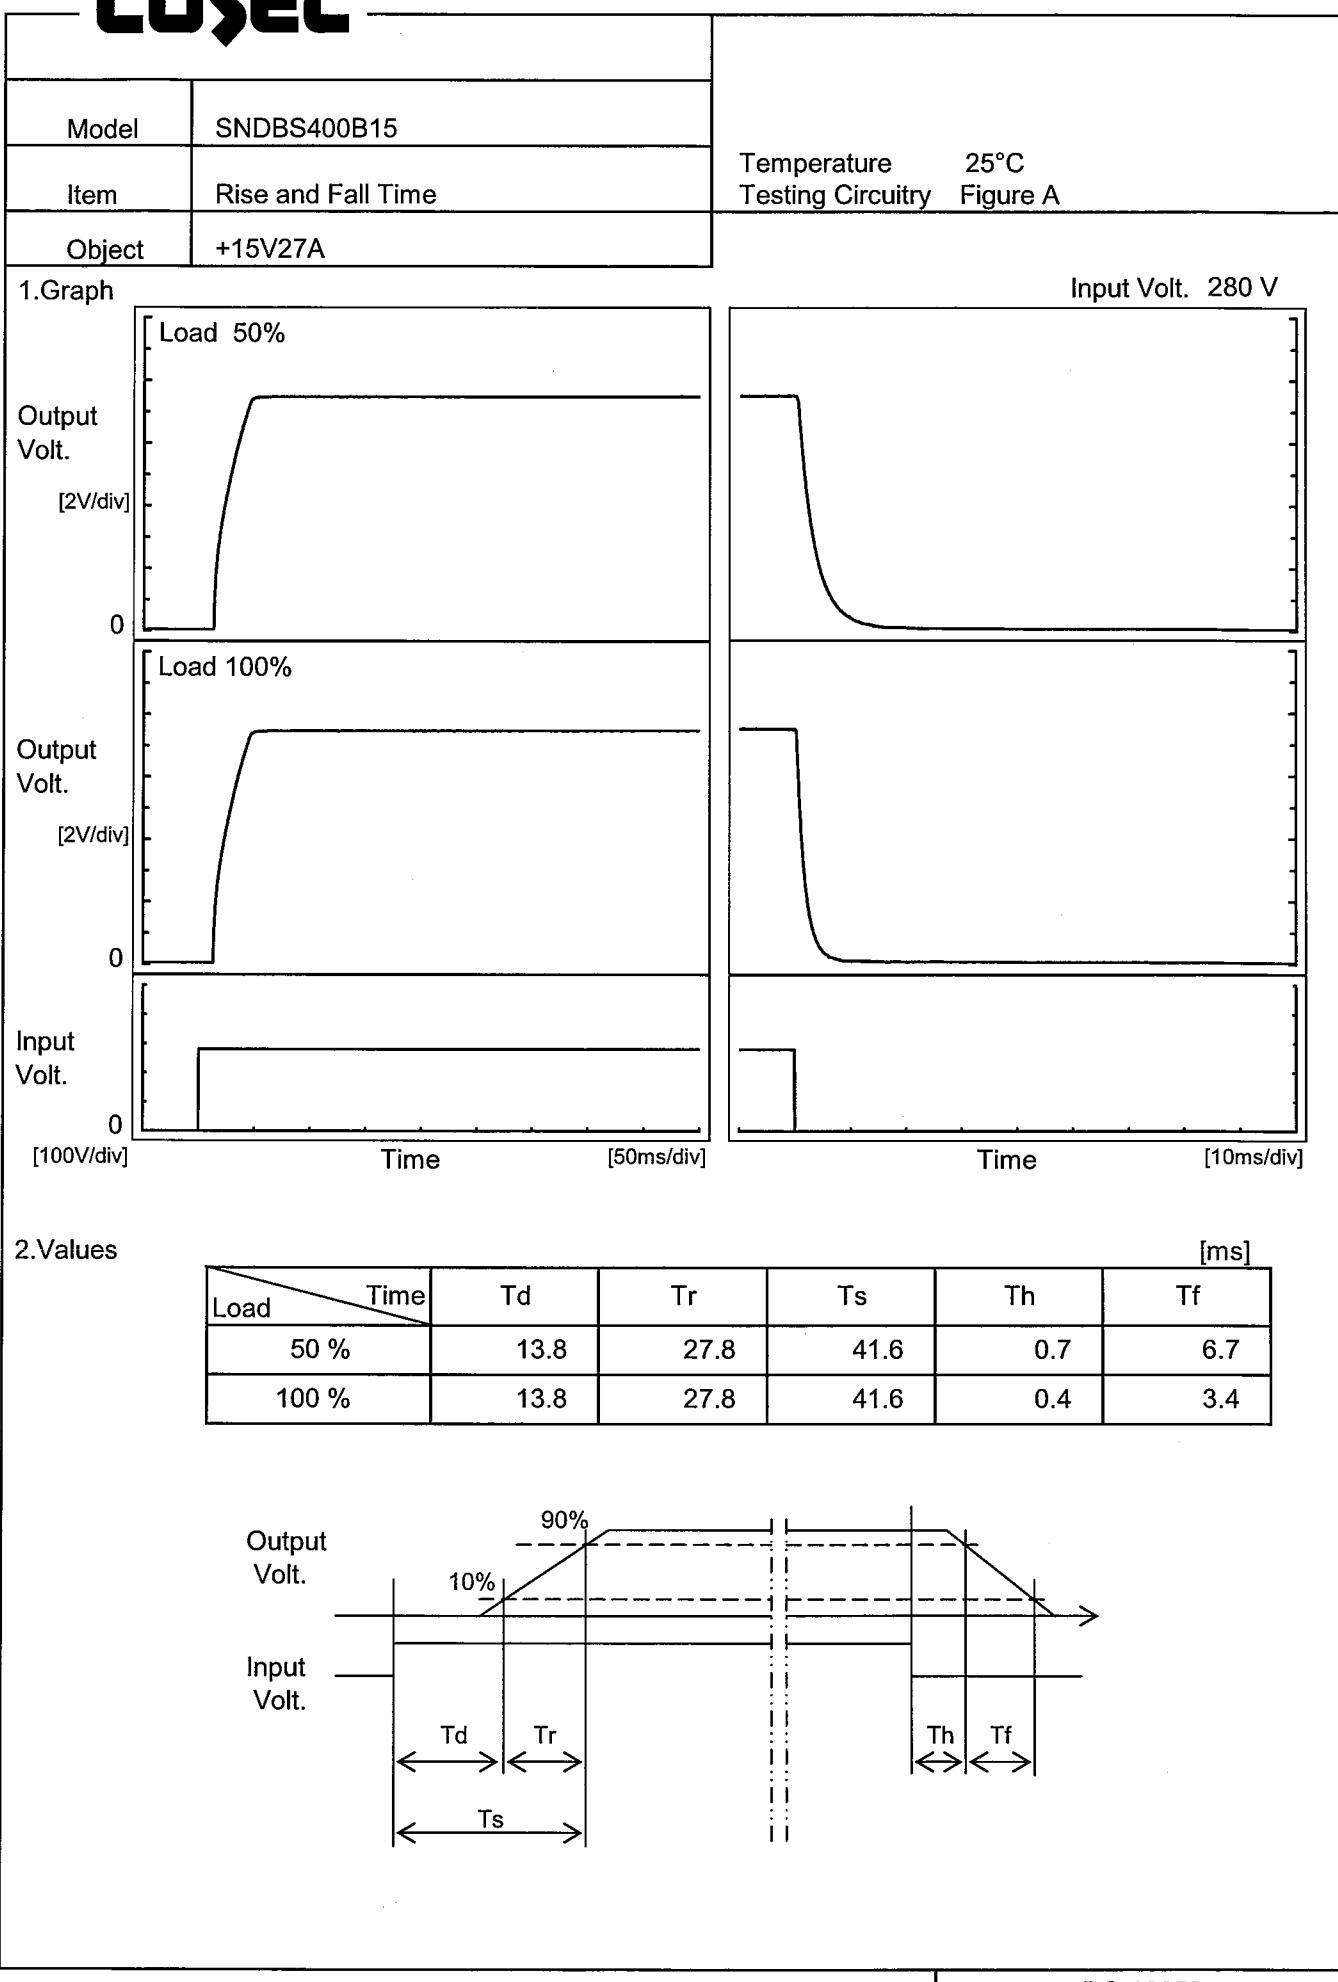coSEL

COSEL

Model	SNDBS400B15
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+15V27A

1. Graph

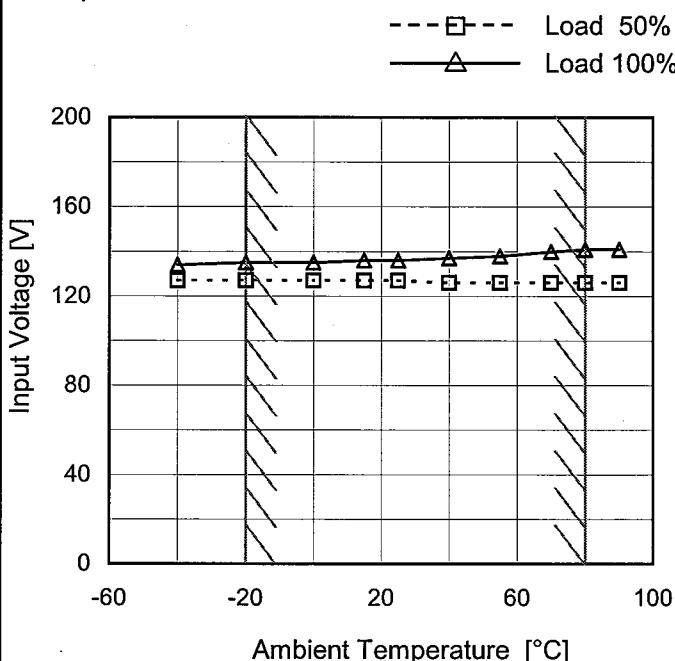

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A


2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-40	127	134
-20	127	135
0	127	135
15	127	136
25	127	136
40	126	137
55	126	138
70	126	140
80	126	141
90	126	141
--	-	-

Model	SNDBS400B15
Item	Overcurrent Protection
Object	+15V27A

Temperature 25°C
Testing Circuitry Figure A

2. Values

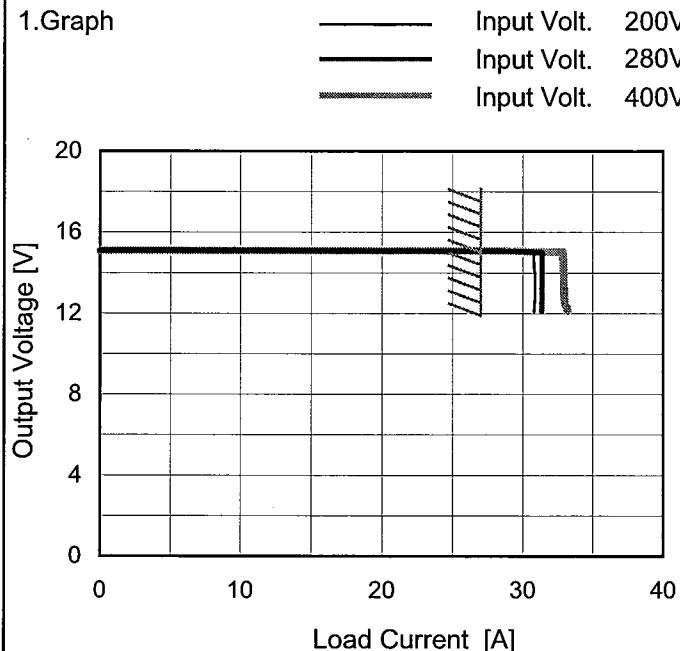

Note: Slanted line shows the range of the rated load current.

Intermittent operation occurs when the output voltage is from 12V to 0V


COSEL

Model SNDBS400B15

Item Overvoltage Protection

Object +15V27A

1. Graph

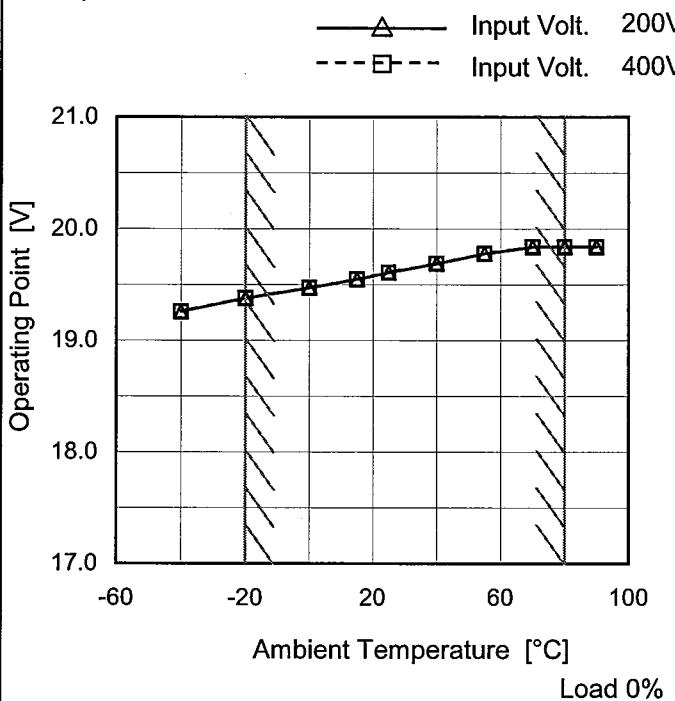

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 200[V]	Input Volt. 400[V]
-40	19.26	19.26
-20	19.38	19.38
0	19.47	19.47
15	19.55	19.55
25	19.61	19.61
40	19.69	19.69
55	19.78	19.78
70	19.84	19.84
80	19.84	19.84
90	19.84	19.84
--	-	-

COSEL

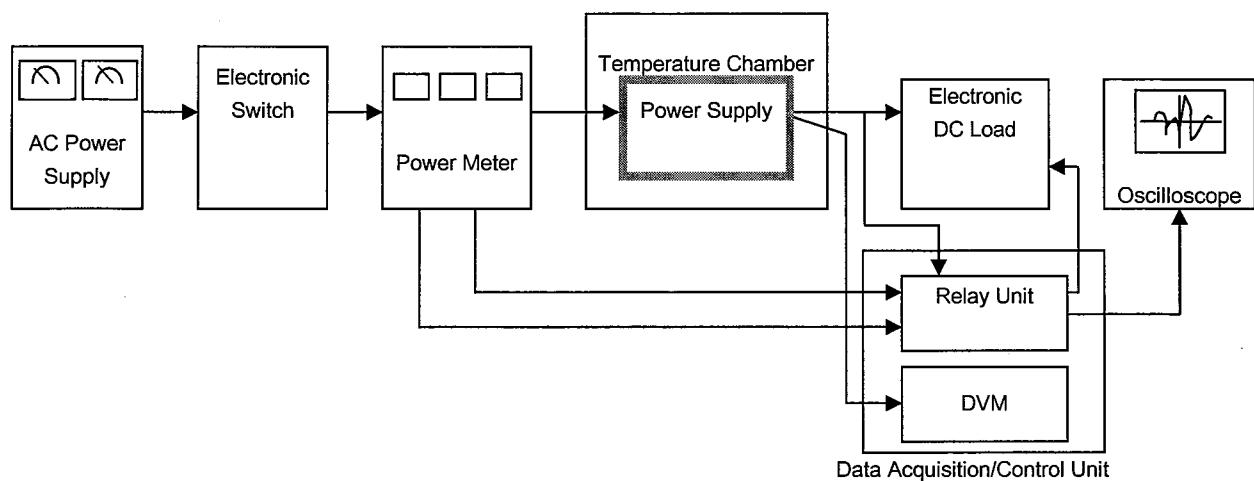


Figure A

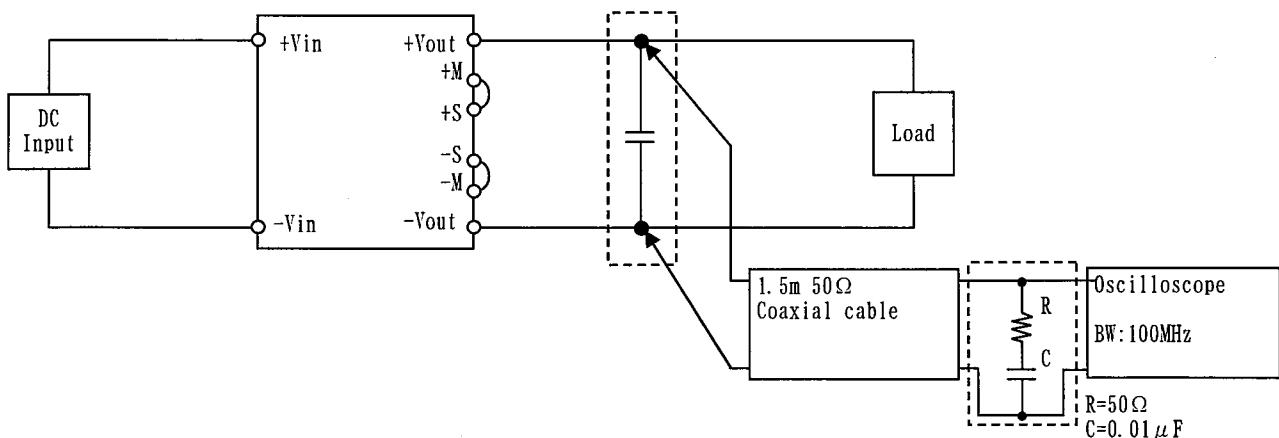


Figure B (Ripple and Ripple noise Characteristic)