


SNDHS100A series EMI/EMS Test resultApproved : Takahiro Yoneda
Takahiro YonedaPrepared : Tadashi Arai
Tadashi Arai


No.	Test item	Conditions	Conditions of Acceptability	Result
1	Line conduction	(1) Rated input DC110V (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1) Meets the undermentioned standard. FCC Part15 classA, VCCI classA CISPR22 classA, EN55022-A EN55011-A	ok
2	Radiated emission	(1) Rated input DC110V (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1) Meets the undermentioned standard. FCC Part15 classA, VCCI classA CISPR22 classA, EN55022-A EN55011-A	ok
3	Static electricity immunity test (EN61000-4-2)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Contact discharge voltage 8[kV] (EN61000-4-2 Level 4)	(1) No protection circuit failure. (2) No output voltage drop with control circuit failure. (3) No any other function failure	ok
4	Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Testing field strength (Level 3) ① 10[V/m] (80MHz to 1.0GHz) ② 3[V/m] (1.4GHz to 2.0GHz) ③ 1[V/m] (2.0GHz to 2.7GHz)	(1) No protection circuit failure. (2) No output voltage drop with control circuit failure. (3) No any other function failure	ok
5	Electrical fast transient/ burst immunity test (EN61000-4-4)	(1) Rated input (DC110V/AC90V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Test peak voltage 2[kV] (Level 3) (5) Testing circuitry Fig.2	(1) No protection circuit failure. (2) No output voltage drop with control circuit failure. (3) No any other function failure	ok
6	Surge immunity test (EN61000-4-5)	(1) Rated input (DC110V/AC90V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4)-1 Test voltage Line to line 2[kV] (Level 3) Line to earth 4[kV] (Level 4) Testing circuitry Fig.1 (4)-2 Test voltage Line to line 2[kV] (Level 3) Line to earth 2[kV] (Level 3) Testing circuitry Fig.2	(1) The power supply is not stop (2) Circuit does not malfunction. (3) No abnormality of the insulation destruction etc. (4) Parts are no damaged.	ok
7	Immunity to conducted disturbances, induced by radio-frequency fields (EN61000-4-6)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Voltage level (e.m.f.) 10[V] (Level 3)	(1) No protection circuit failure. (2) No output voltage drop with control circuit failure. (3) No any other function failure	ok

COSEL

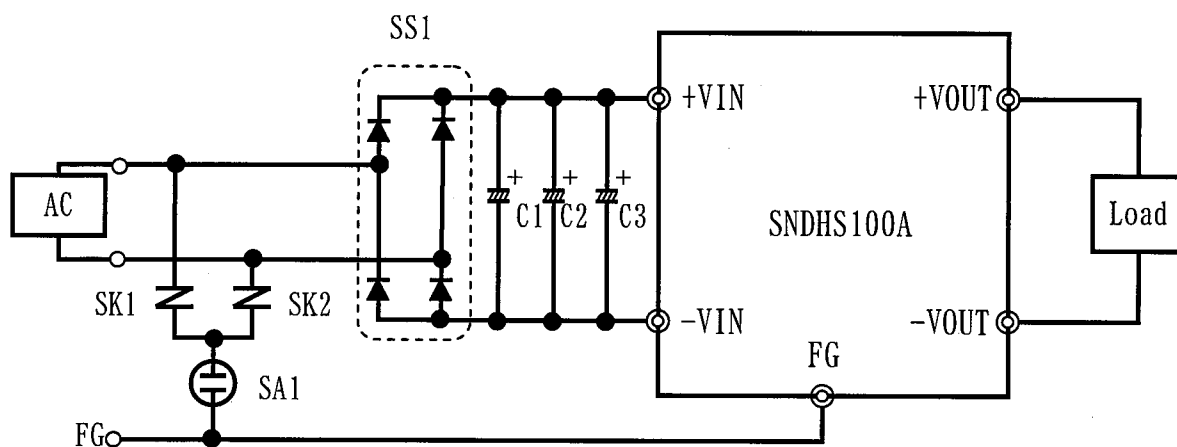

SS1 : D10XB60 (SHINDENGEN)
 C1, C2, C3 : 100 μ F
 SA1 : DSA-302MA (MITSUBISHI MATERIALS CORP.)
 SK1, SK2 : TND14V-471K (NIPPON CHEMI-CON)

Fig.1 Testing circuitry

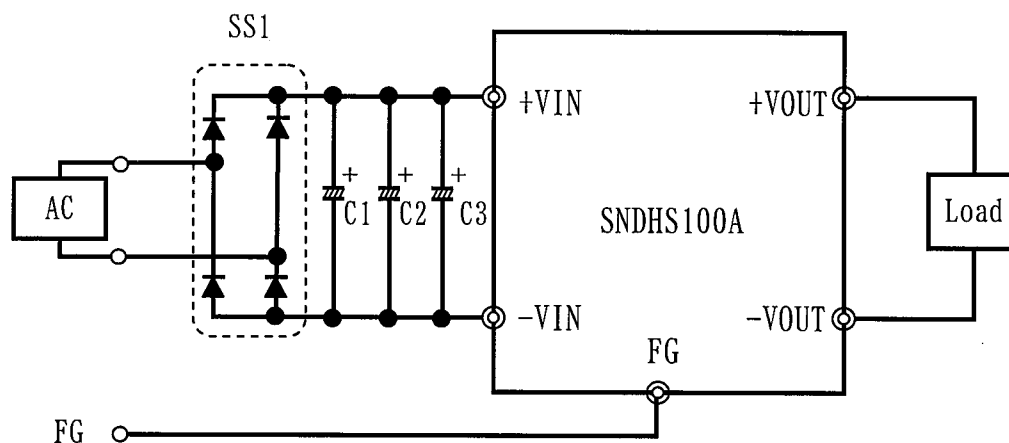

SS1 : D10XB60 (SHINDENGEN)
 C1, C2, C3 : 100 μ F

Fig.2 Testing circuitry