



DATA SHEET		Date	01-Nov-11
Model	SPLFA100F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

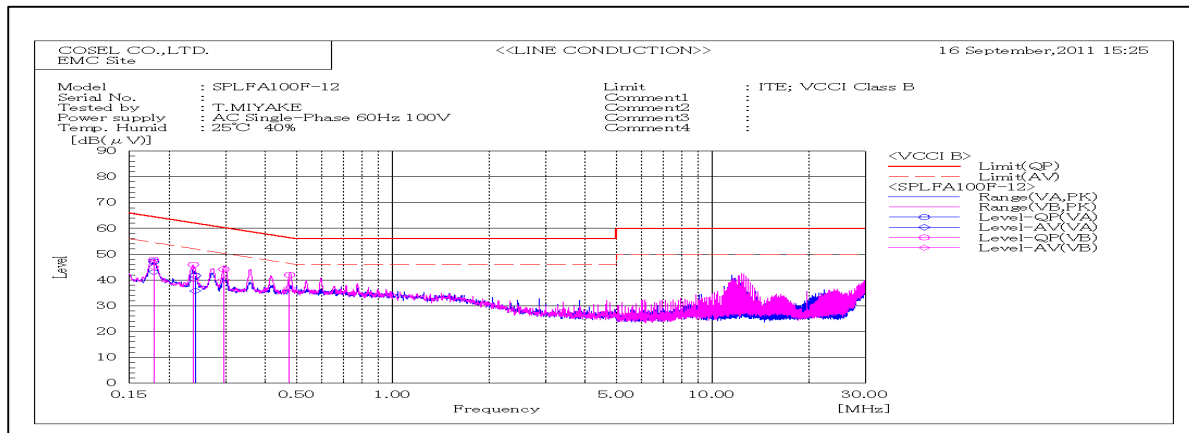


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17879	VA	27.0	22.8	20.2	47.2	43.0	64.5	54.5	17.3	11.5	Pass	
0.17881	VB	27.7	24.9	20.2	47.9	45.1	64.5	54.5	16.6	9.4	Pass	
0.23784	VB	25.8	20.3	20.1	45.9	40.4	62.2	52.2	16.3	11.8	Pass	
0.24109	VA	21.6	15.7	20.1	41.7	35.8	62.1	52.1	20.4	16.3	Pass	
0.29629	VB	24.1	20.1	20.1	44.2	40.2	60.3	50.3	16.1	10.1	Pass	
0.47601	VB	22.0	17.0	20.0	42.0	37.0	56.4	46.4	14.4	9.4	Pass	

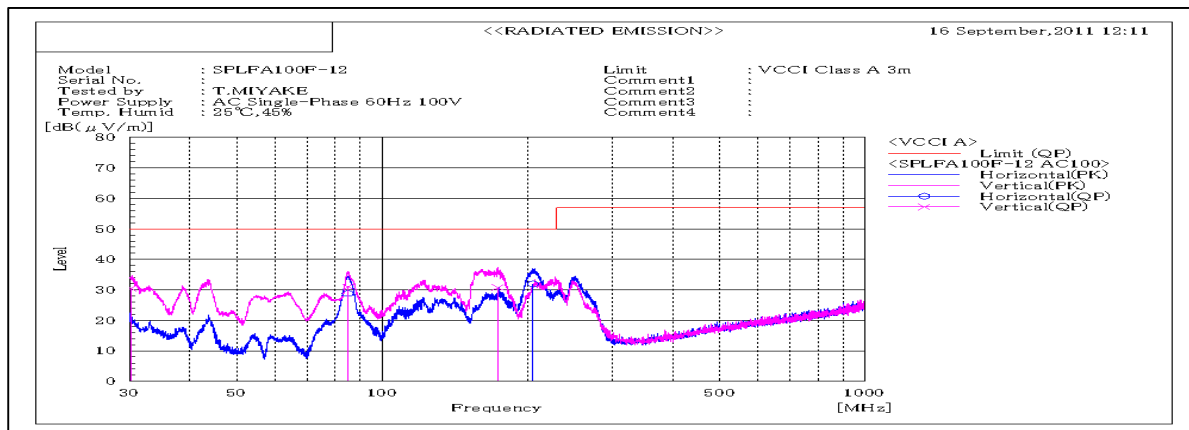

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP					
30.20900	V	44.0	-13.5	30.5	50.0	19.5	Pass	101	184	
84.90100	H	52.5	-23.7	28.8	50.0	21.2	Pass	155	256	
85.08600	V	54.7	-23.7	31.0	50.0	19.0	Pass	100	315	
173.60400	V	53.0	-22.2	30.8	50.0	19.2	Pass	120	324	
205.48100	H	53.8	-21.9	31.9	50.0	18.1	Pass	111	99	

DATA SHEET		Date	01-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

## 1. Line conduction

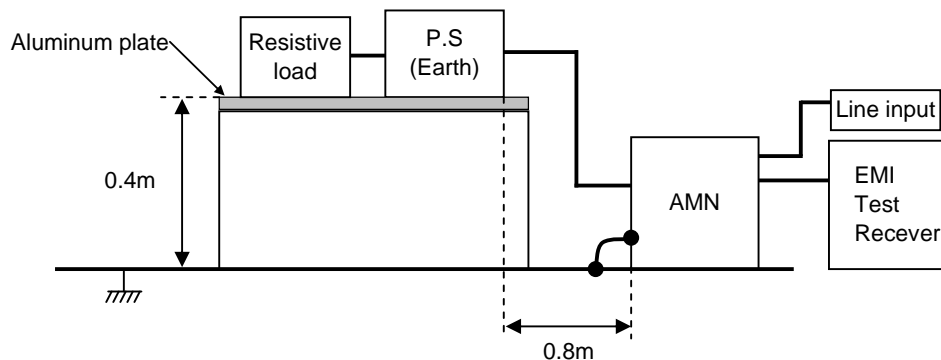

## 2. Radiated emission

