



DATA SHEET		Date	01-Nov-11
Model	SPLFA100F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

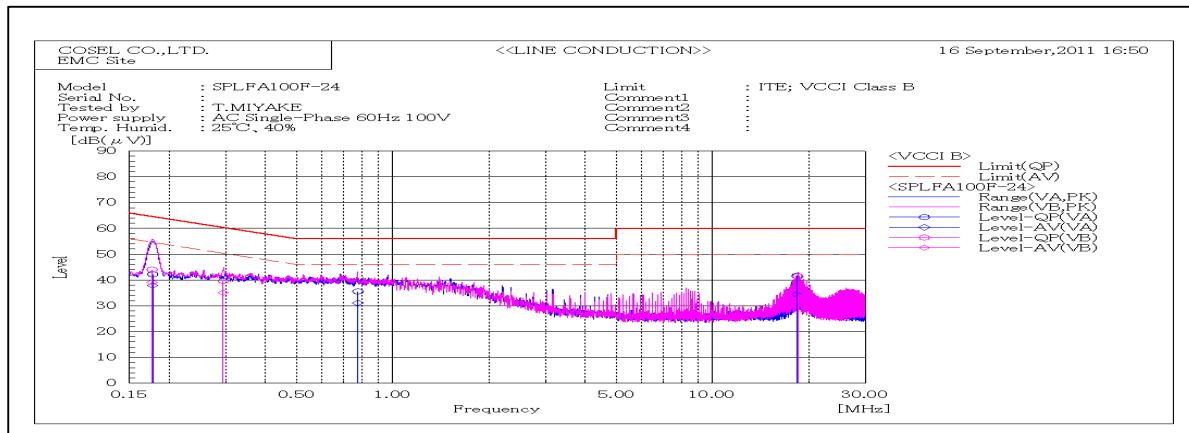


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17681	VA	22.0	17.7	20.2	42.2	37.9	64.6	54.6	22.4	16.7	Pass	
0.17731	VB	23.9	18.9	20.2	44.1	39.1	64.6	54.6	20.5	15.5	Pass	
0.29498	VB	19.5	15.0	20.1	39.6	35.1	60.4	50.4	20.8	15.3	Pass	
0.77858	VA	15.4	10.9	20.2	35.6	31.1	56.0	46.0	20.4	14.9	Pass	
18.36975	VA	20.4	13.2	21.2	41.6	34.4	60.0	50.0	18.4	15.6	Pass	
18.4737	VB	20.3	13.3	21.2	41.5	34.5	60.0	50.0	18.5	15.5	Pass	

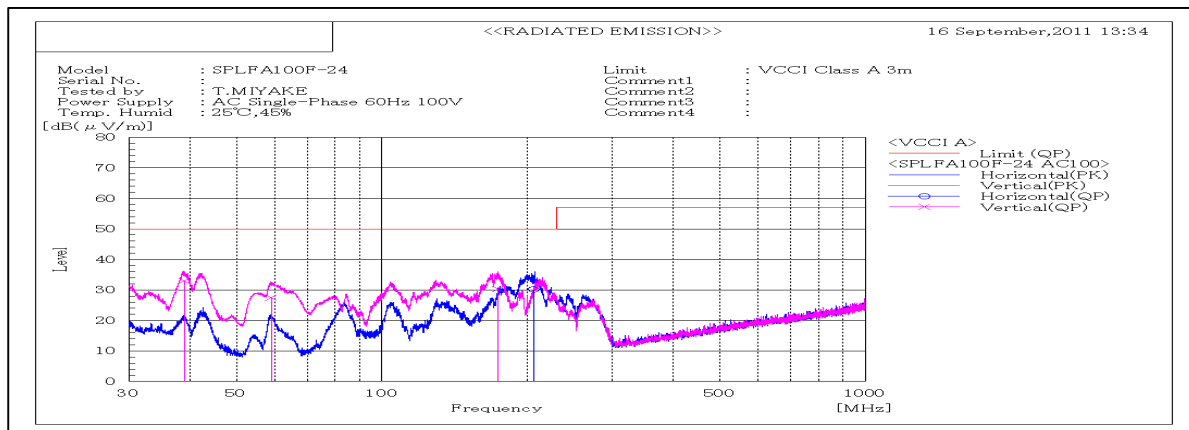

Frequency MHz	Polariz ation	Stabili ty	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
38.988	V	Stable	51	-18	33	50	17	Pass	100	208	
59.047	V	Stable	53.6	-26.1	27.5	50	22.5	Pass	100	0	
173.85	V	Stable	52.5	-22.2	30.3	50	19.7	Pass	102	196	
206.067	H	Stable	52	-21.9	30.1	50	19.9	Pass	126	101	

DATA SHEET		Date	01-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

1. Line conduction

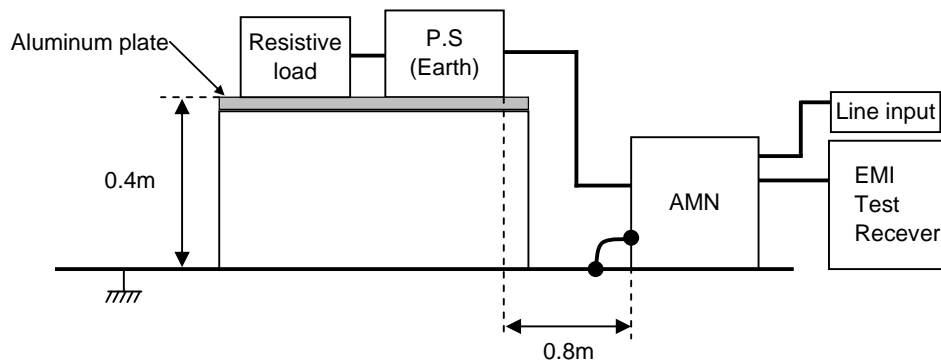

2. Radiated emission

