



DATA SHEET		Date	01-Nov-11
Model	SPLFA150F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.MIYAKE

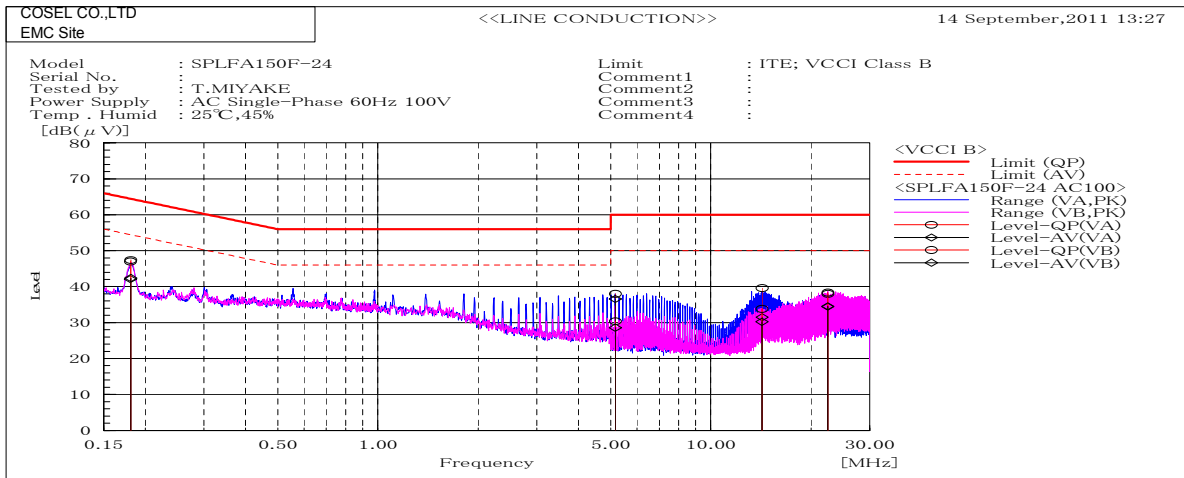


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18049	VA	36.8	31.9	10.2	47.0	42.1	64.5	54.5	17.5	12.4	Pass	
0.18097	VB	37.2	32.2	10.2	47.4	42.4	64.4	54.4	17.0	12.0	Pass	
5.16588	VA	27.7	26.3	10.3	38.0	36.6	60.0	50.0	22.0	13.4	Pass	
5.16606	VB	20.1	18.3	10.3	30.4	28.6	60.0	50.0	29.6	21.4	Pass	
14.24225	VB	23.2	19.6	10.6	33.8	30.2	60.0	50.0	26.2	19.8	Pass	
14.26705	VA	28.9	20.8	10.7	39.6	31.5	60.0	50.0	20.4	18.5	Pass	
22.47670	VA	27.0	23.4	11.0	38.0	34.4	60.0	50.0	22.0	15.6	Pass	
22.47780	VB	27.4	23.6	10.9	38.3	34.5	60.0	50.0	21.7	15.5	Pass	

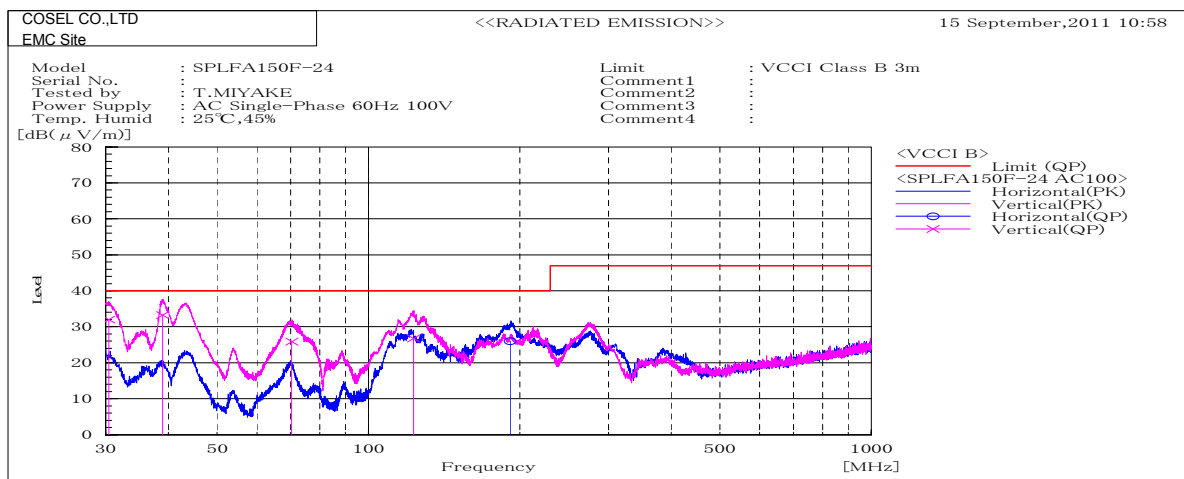

Frequency MHz	Polariz ation	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
30.44600	V	45.6	-13.6	32.0	40.0	8.0	Pass	123	153	
38.94300	V	51.2	-18.0	33.2	40.0	6.8	Pass	114	242	
70.40000	V	51.4	-25.5	25.9	40.0	14.1	Pass	116	0	
122.93700	V	46.4	-19.6	26.8	40.0	13.2	Pass	101	1	
191.38400	H	48.2	-22.2	26.0	40.0	14.0	Pass	115	96	

DATA SHEET		Date	01-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.MIYAKE

## 1. Line conduction

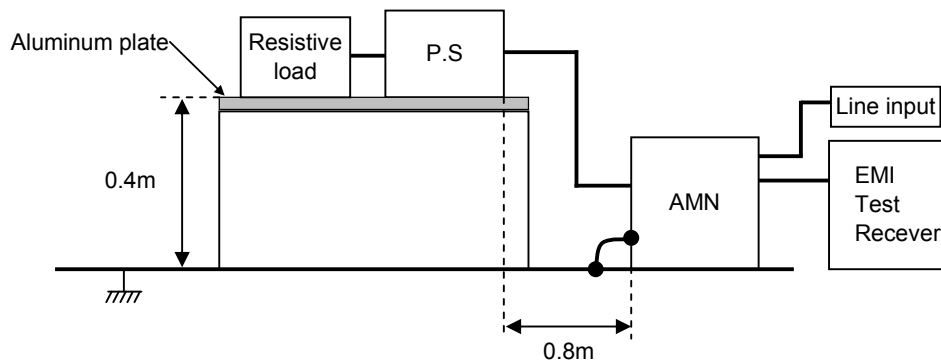

## 2. Radiated emission

