



DATA SHEET		Date	25-May-11
Model	SPLFA30F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Kitamura

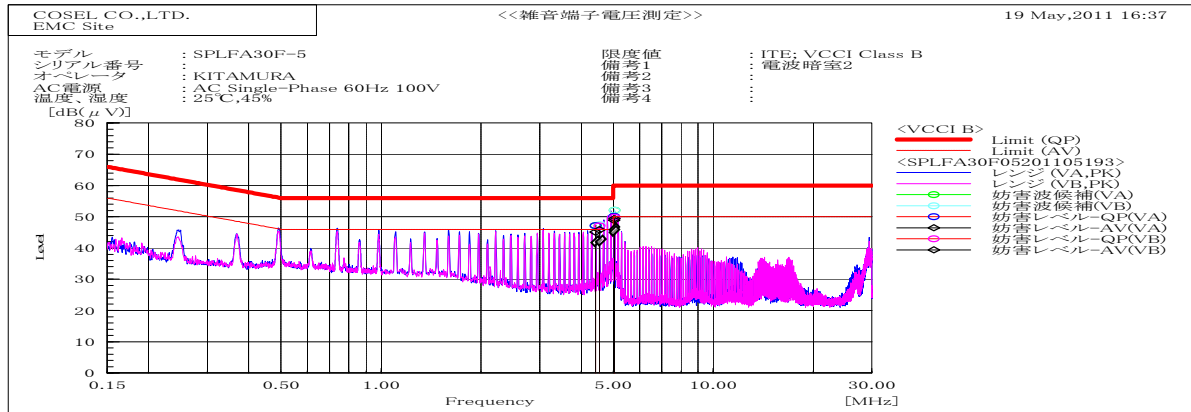


Frequency MHz	Line Phas	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
4.4259	VA	36.9	28.9	10.2	47.1	39.1	56	46	8.9	6.9	Pass	
4.54902	VB	36.8	29.6	10.3	47.1	39.9	56	46	8.9	6.1	Pass	
5.03713	VB	39.6	33.5	10.3	49.9	43.8	60	50	10.1	6.2	Pass	
5.0396	VA	39.8	33.2	10.3	50.1	43.5	60	50	9.9	6.5	Pass	

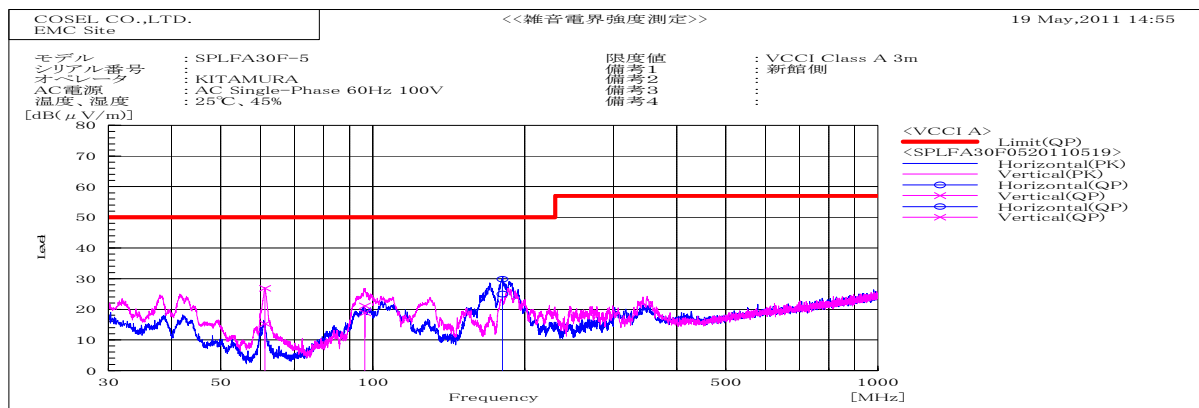

Frequency MHz	Polarization	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	QP	QP				
61.185	V	41.4	-26.1	15.3	50	34.7	Pass	159	104		
96.675	V	41	-22.1	18.9	50	31.1	Pass	100	34		
180.5	H	52.1	-22.3	29.8	50	20.2	Pass	159	18		

DATA SHEET		Date	25-May-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Kitamura

1. Line conduction

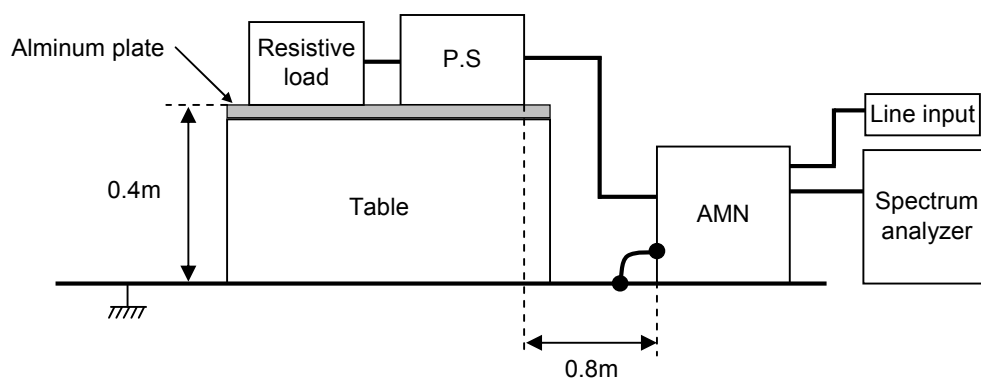

2. Radiated emission

