



DATA SHEET				Date	25-May-11
Model	SPLFA75F-24			Temp.	25 degreeC
Test	EMI			Humid.	40 %RH
	Line conduction & Radiated emission			Tested by	H.Kitamura

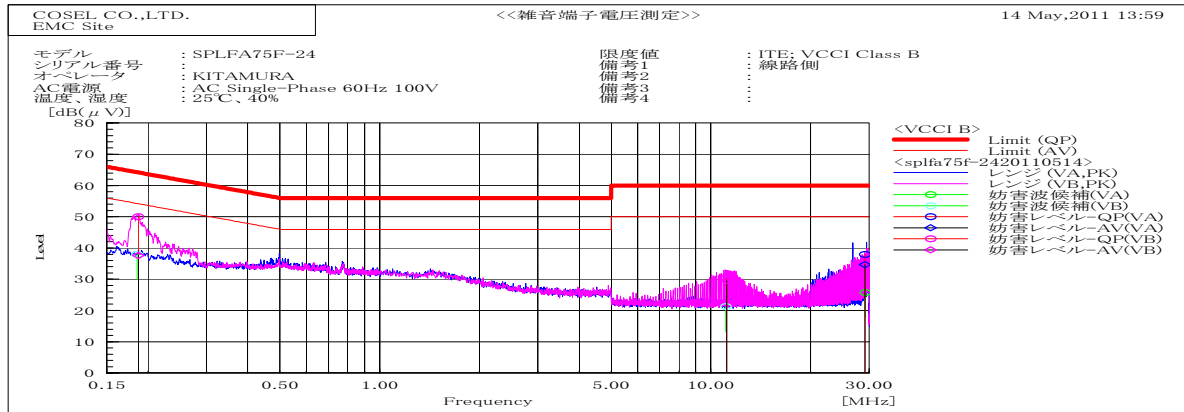


Frequency MHz	Line Phas	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18686	VB	39.9	27.4	10.2	50.1	37.6	64.2	54.2	14.1	16.6	Pass	
11.1407	VB	20.1	19.2	10.4	30.5	29.6	60	50	29.5	20.4	Pass	
29.22115	VA	26.9	23.7	11	37.9	34.7	60	50	22.1	15.3	Pass	

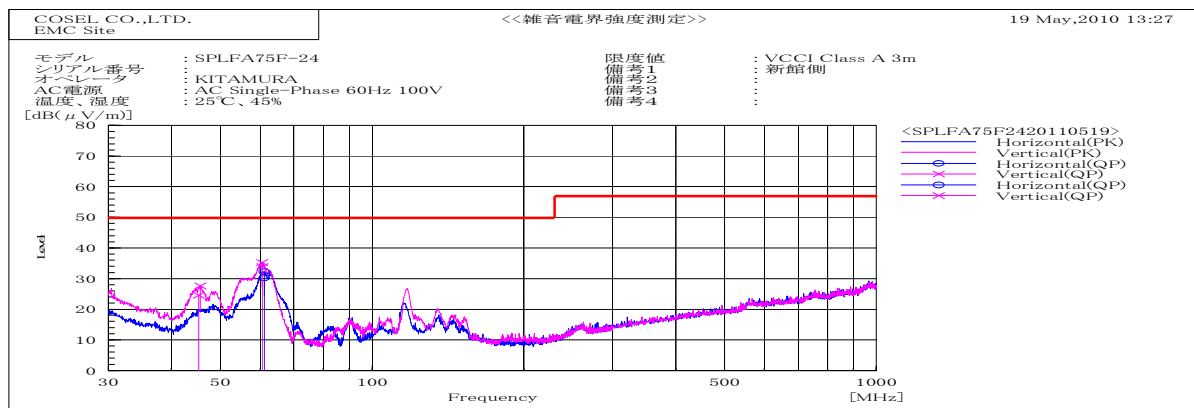

Frequency MHz	Polarization	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	AV					
45.61	V	49.4	21.7	-21.7	27.7	50	22.3	Pass	101	214	
60.45	V	61	25.7	-25.7	35.3	50	14.7	Pass	101	269	
61.08	H	58	25.7	-25.7	32.3	50	17.7	Pass	159	96	

DATA SHEET		Date	25-May-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Kitamura

1. Line conduction

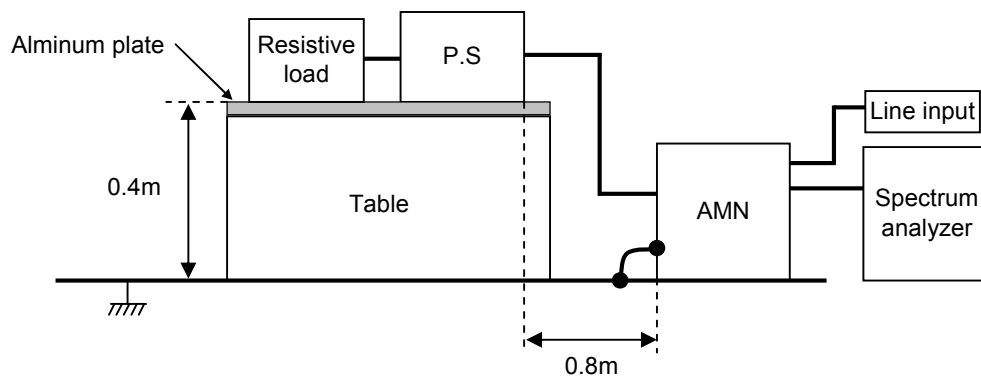

2. Radiated emission

