



DATA SHEET		Date	25-May-11
Model	SPLFA75F-5	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Kitamura

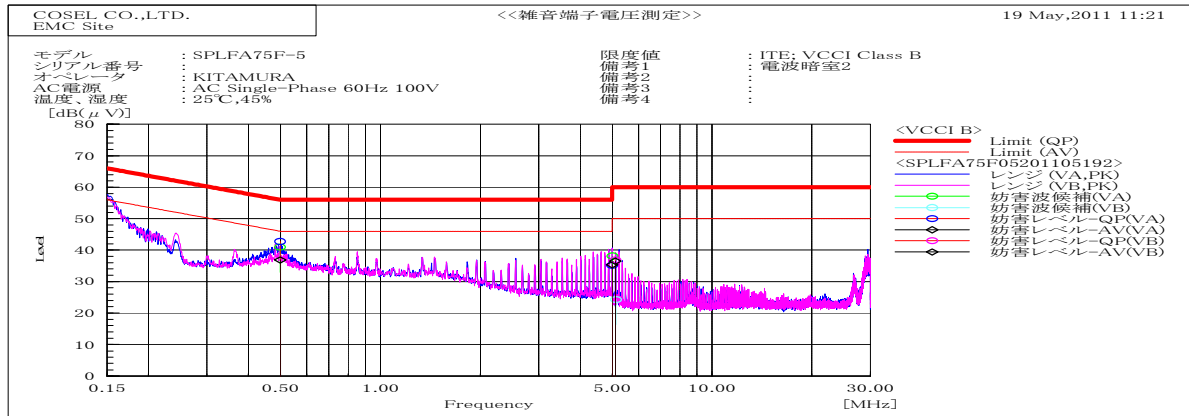


Frequency MHz	Line Phas	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.49917	VA	32.6	26.8	10.1	42.7	36.9	56	46	13.3	9.1	Pass	
4.99694	VA	24.9	25.1	10.3	35.2	35.4	56	46	20.8	10.6	Pass	
5.11363	VB	26.6	26.2	10.3	36.9	36.5	60	50	23.1	13.5	Pass	

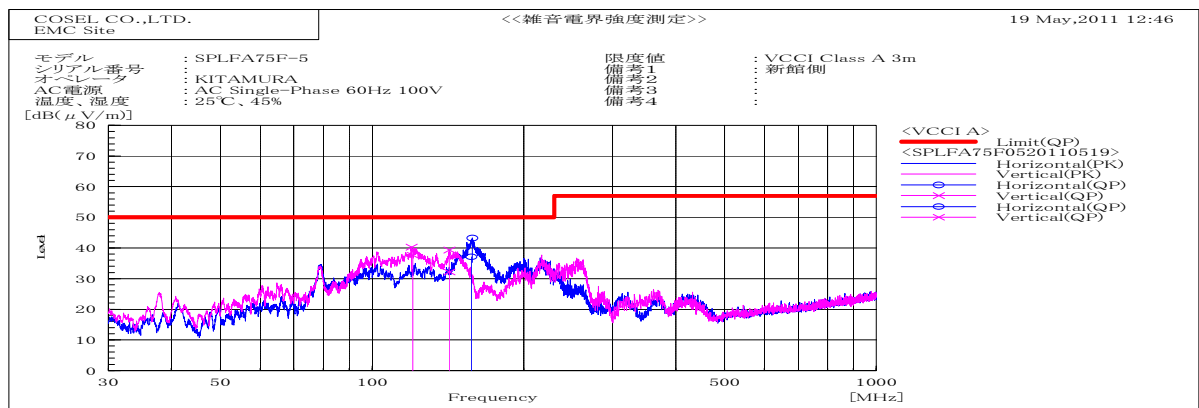

Frequency MHz	Polarization	Reading dB(μV)		Space Loss dB	Level dB(mW)		Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	AV		QP				
119.7	V	59.8	-19.5	40.3	50	9.7	Pass	100	107			
142.3	V	59.3	-20	39.3	50	10.7	Pass	159	95			
158	H	64	-20.8	43.2	50	6.8	Pass	159	351			

DATA SHEET		Date	25-May-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Kitamura

1. Line conduction

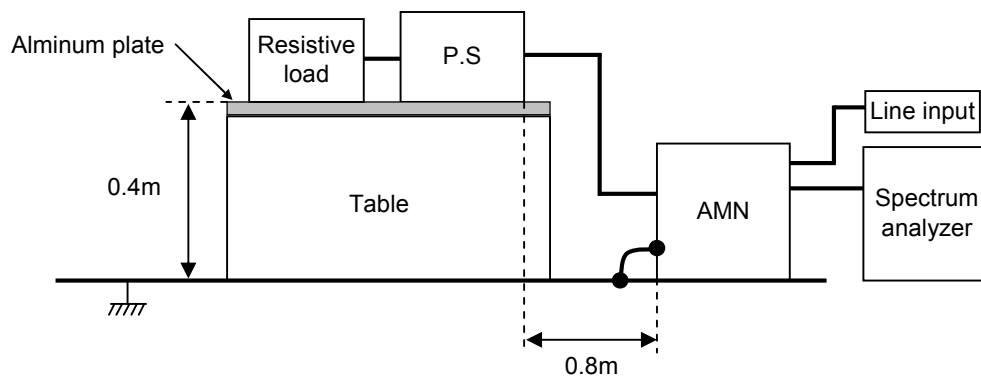

2. Radiated emission

