



RADIATED EMISSION

Model Name : STA5000T

Model No. : -

Serial No. : -

Temperature : 25deg C

Detector : PEAK

Bands : 3

Polarization : Hori. & Vert.

Limit1: [EN 55022] Class A<3m>

Limit2: [EN 55022] Class B<3m>(-10dB)


Humidity : 45%

Comment : DC-DC converter DBS400B05 10Units

Tested by : K.Tajima

Date : 2000/6/7 22:24

EMI Receiver(s) : R3261A,ESPC

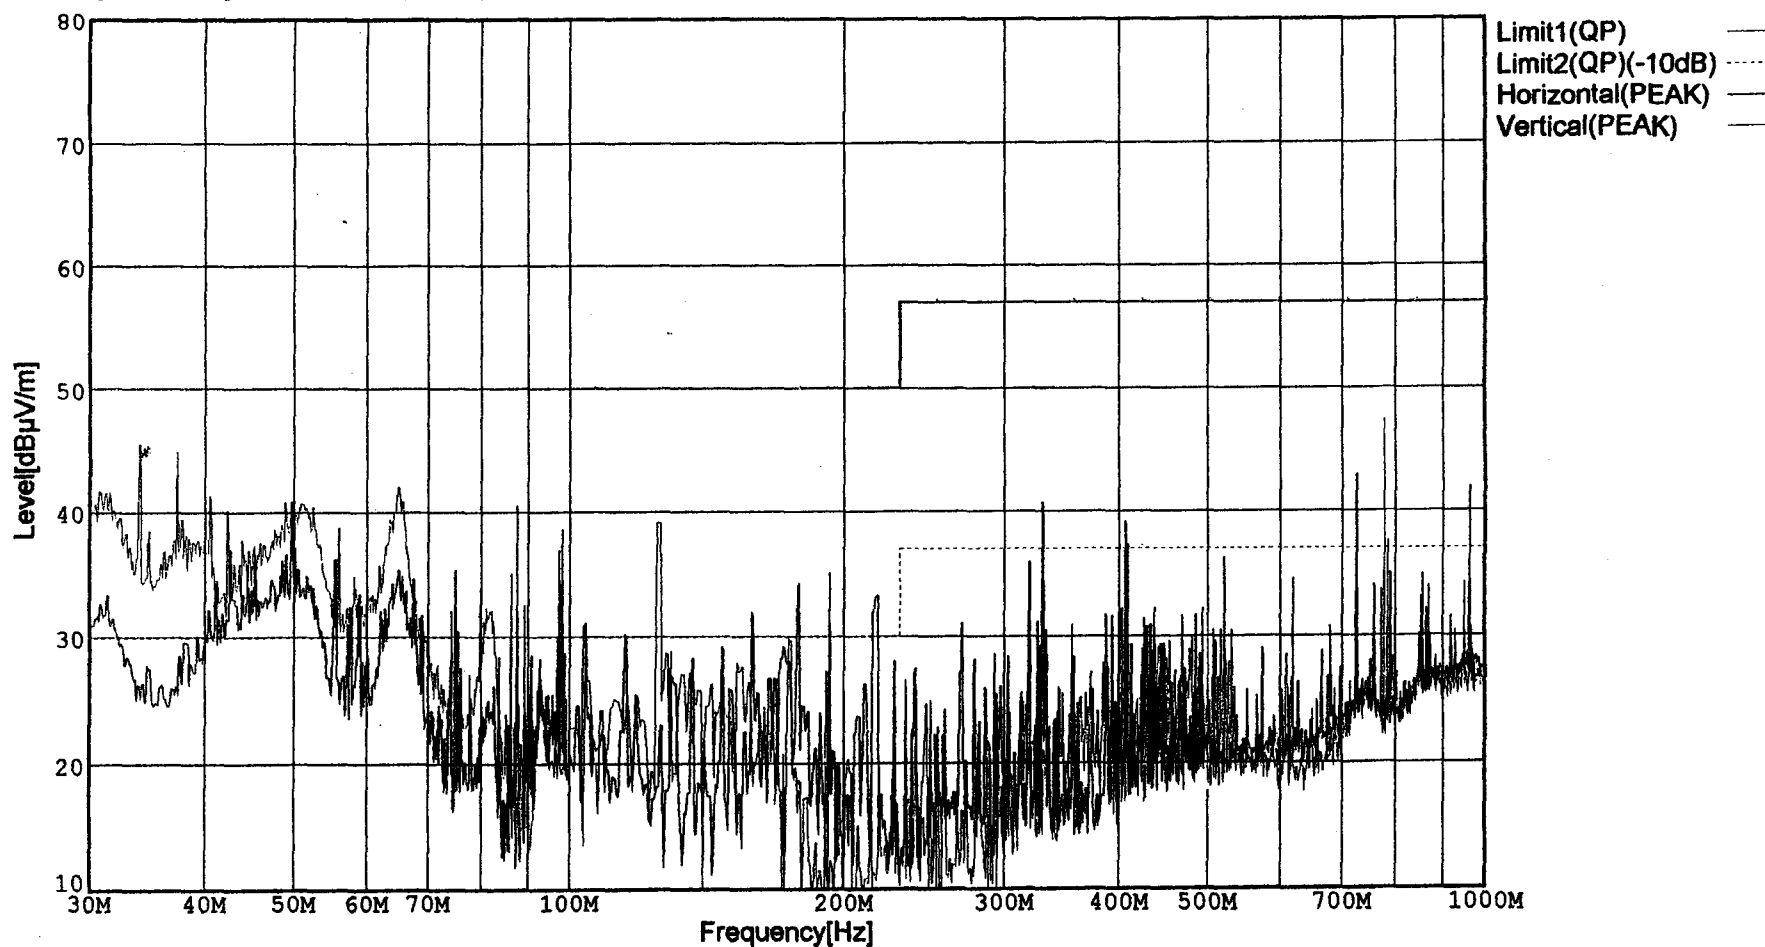



LINE CONDUCTION

Model Name : STA5000T

Humidity : 45%

Model No. : -

Comment : DC-DC converter DBS400B05 10Units

Serial No. : -

Tested by : K.Tajima

Temperature : 25deg C

Detector : PEAK/QP/Ave.

Date : 2000/6/7 19:38


Points : 3

EMI Receiver(s) : R3261A,ESPC

Line Mode : VA/VC

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)

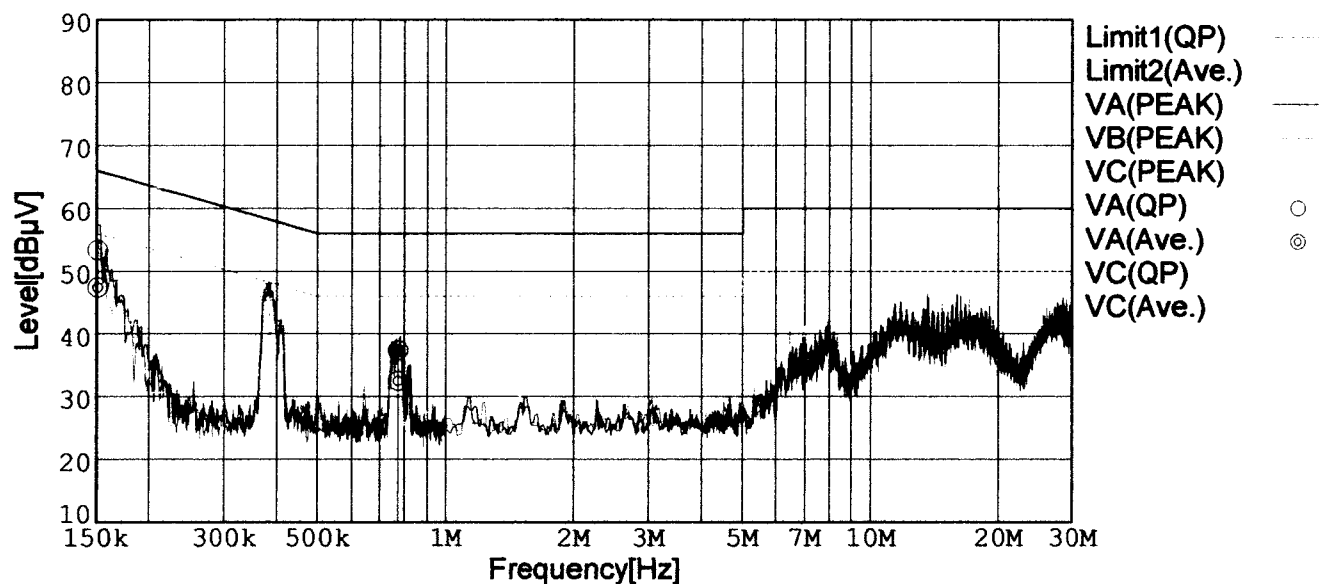

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1506	43.0	37.0	10.3	53.3	47.3	VA	66.0	56.0	12.7	8.7
0.7718	27.2	22.4	10.1	37.3	32.5	VA	56.0	46.0	18.7	13.5
0.3842	36.0	31.4	10.2	46.2	41.6	VC	58.2	48.2	12.0	6.6