

TEST DATA OF TAC-04-□□□

Noise Filter

Sep. 11 , 2017

Approved by : Tadayuki Noda
Tadayuki Noda Design Manager

Prepared by : Issei Okuno
Issei Okuno Design Engineer

COSEL CO.,LTD.





CONTENTS

1.Attenuation Characteristics	1
2.Leakage Current	3
3.Figure of Testing Circuitry	4
(Final Page 4)	


COSEL

Model	TAC-04-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

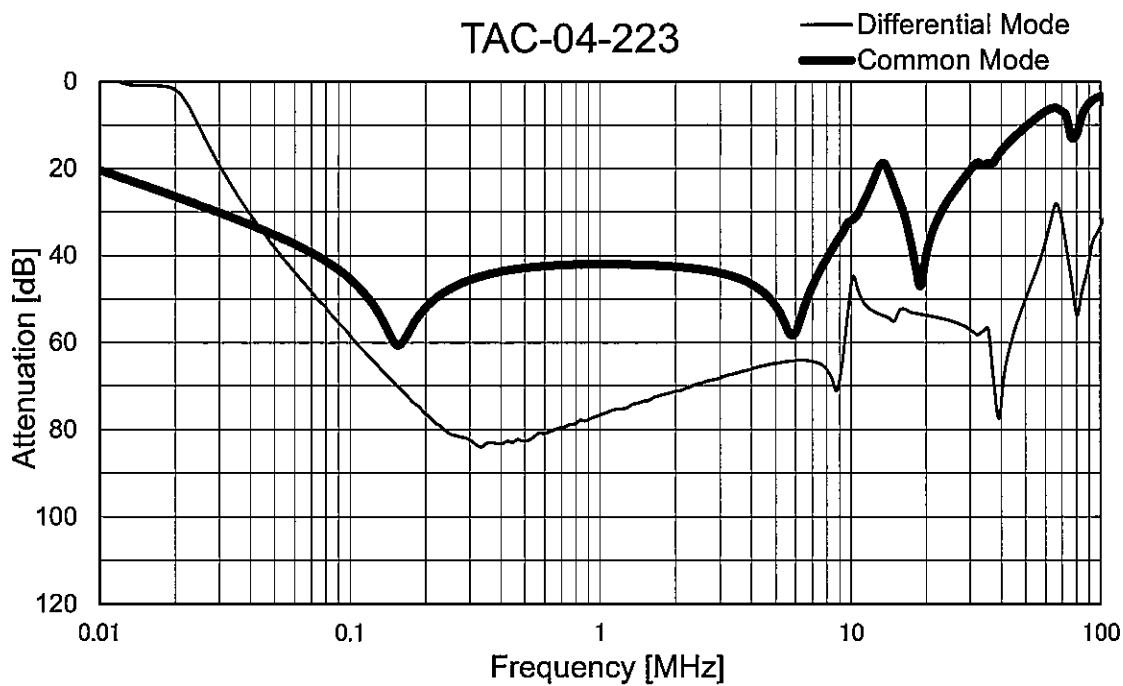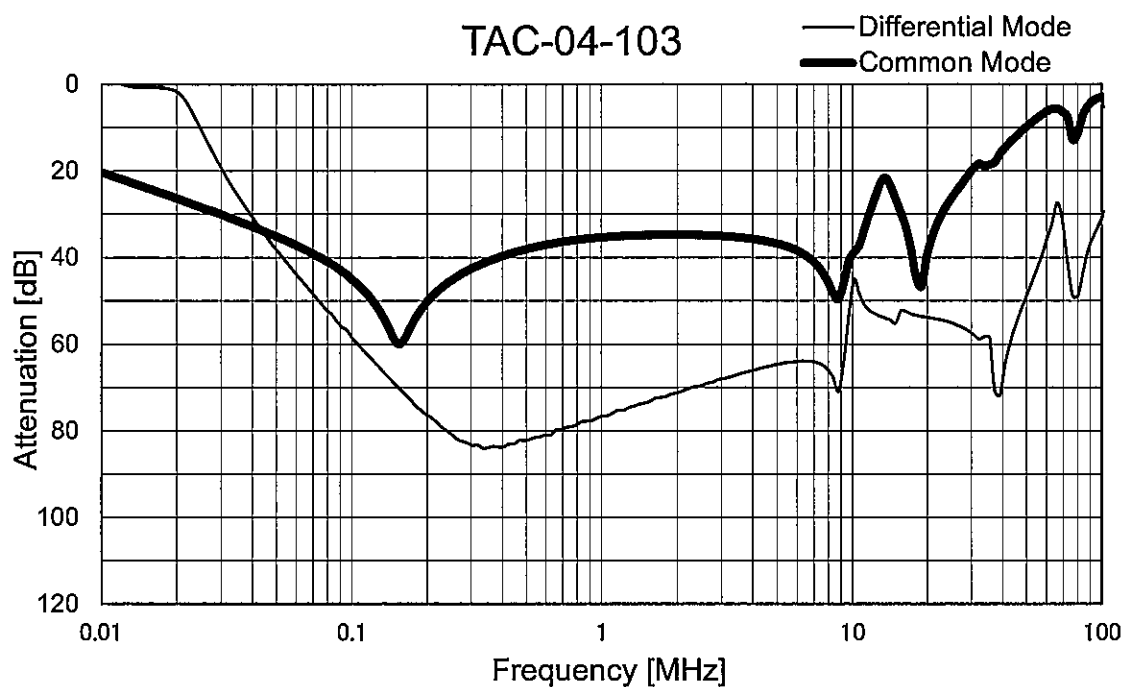



Model	TAC-04-□□□	Temperature 25°C Testing Circuitry Figure A
Item	Attenuation Characteristics	
Object	_____	

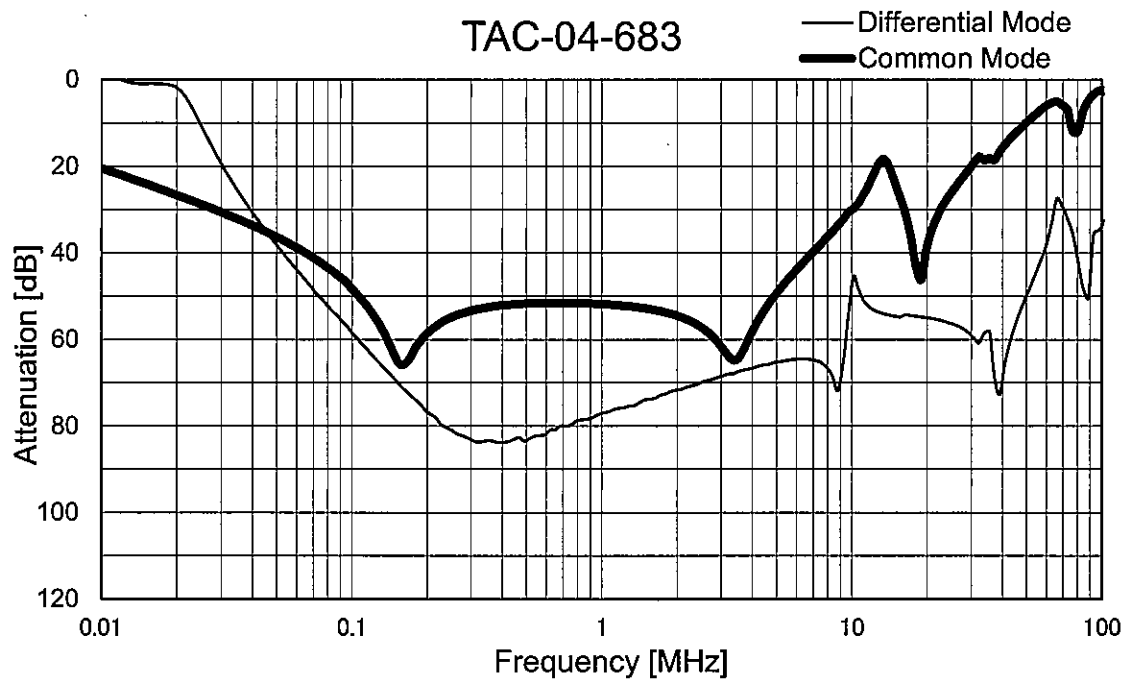



		Temperature 25°C Testing Circuitry Figure B
Model	TAC-04-□□□	
Item	Leakage Current	
Object	_____	

1.Results

[mA]

Model	Standards	Input Volt.				Note
		200[V]	250[V]	400[V]	500[V]	
TAC-04-103	UL1283	0.23	0.28	0.45	0.57	
TAC-04-223	UL1283	0.52	0.65	1.0	1.3	
TAC-04-683	UL1283	1.4	1.8	2.8	3.6	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

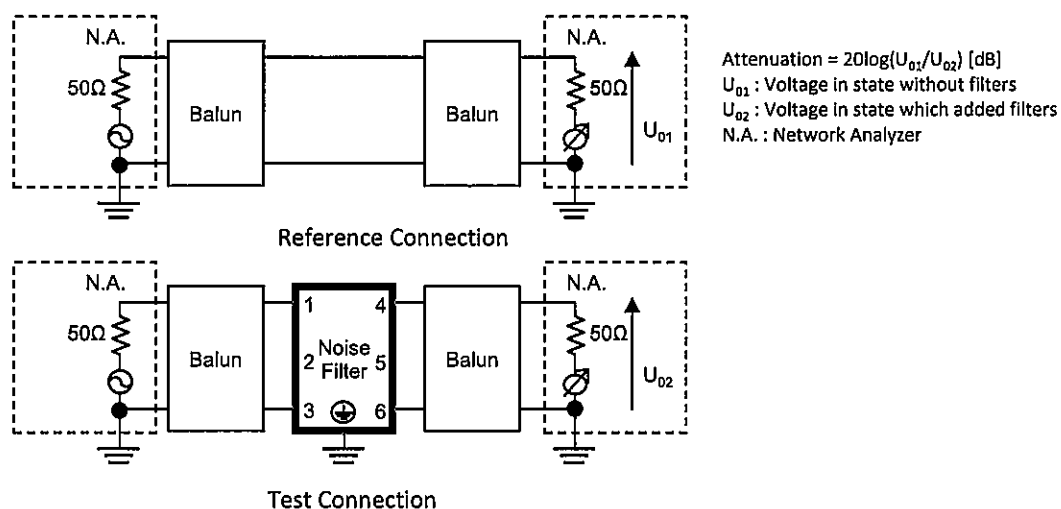


Figure A - 1 Differential mode attenuation measurement

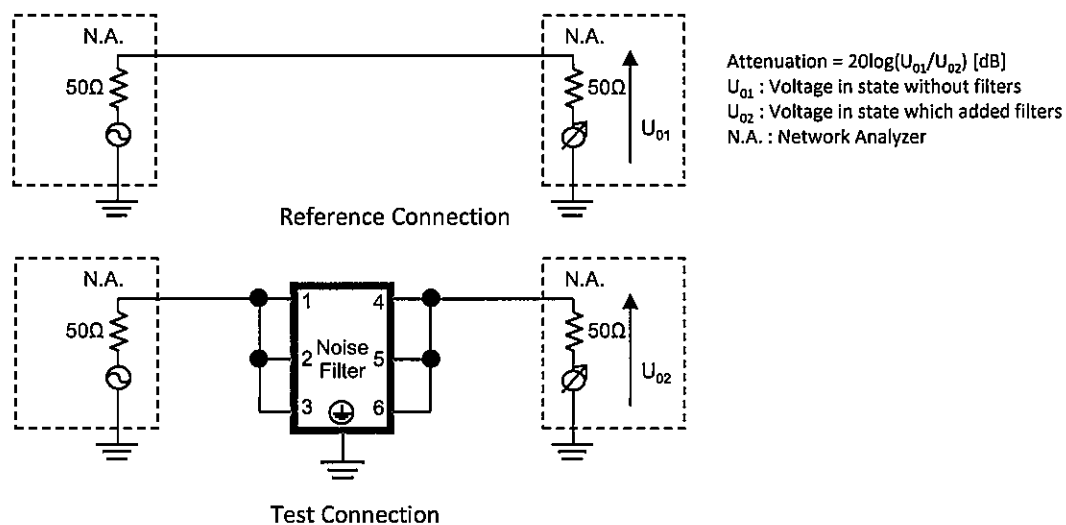


Figure A - 2 Common mode attenuation measurement

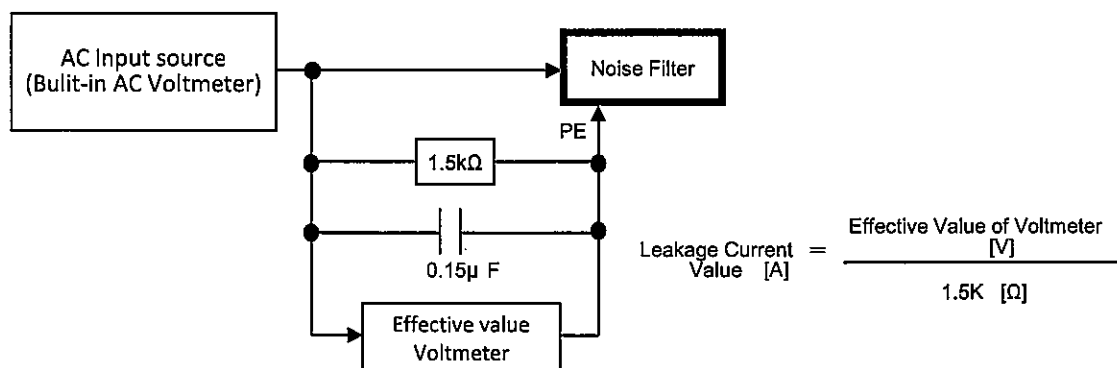


Figure B Leakage current measurement (UL1283)