

TEST DATA OF TBC-60-□□□**Noise Filter**

Oct. 31. 2011

Approved by : Toshio Watanabe
Toshio Watanabe Design Manager

Prepared by : Yuichi Uozu
Yuichi Uozu Design Engineer



COSEL CO.,LTD.

CONTENTS

1.Attenuation Characteristics 1
2.Leakage Current 3
3.Figure of Testing Circuitry 4
(Final Page 4)




| | | | |
|--------|-----------------------------|-------------------|----------|
| Model | TBC-60-□□□ | Temperature | 25°C |
| Item | Attenuation Characteristics | Testing Circuitry | Figure A |
| Object | _____ | | |

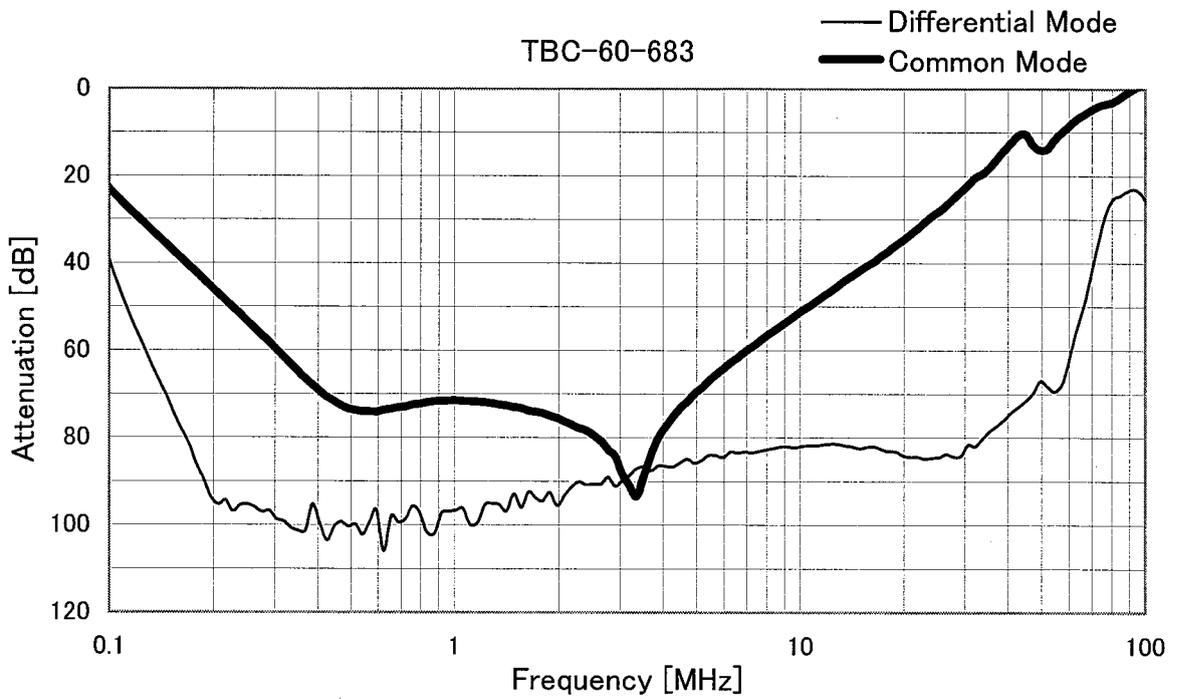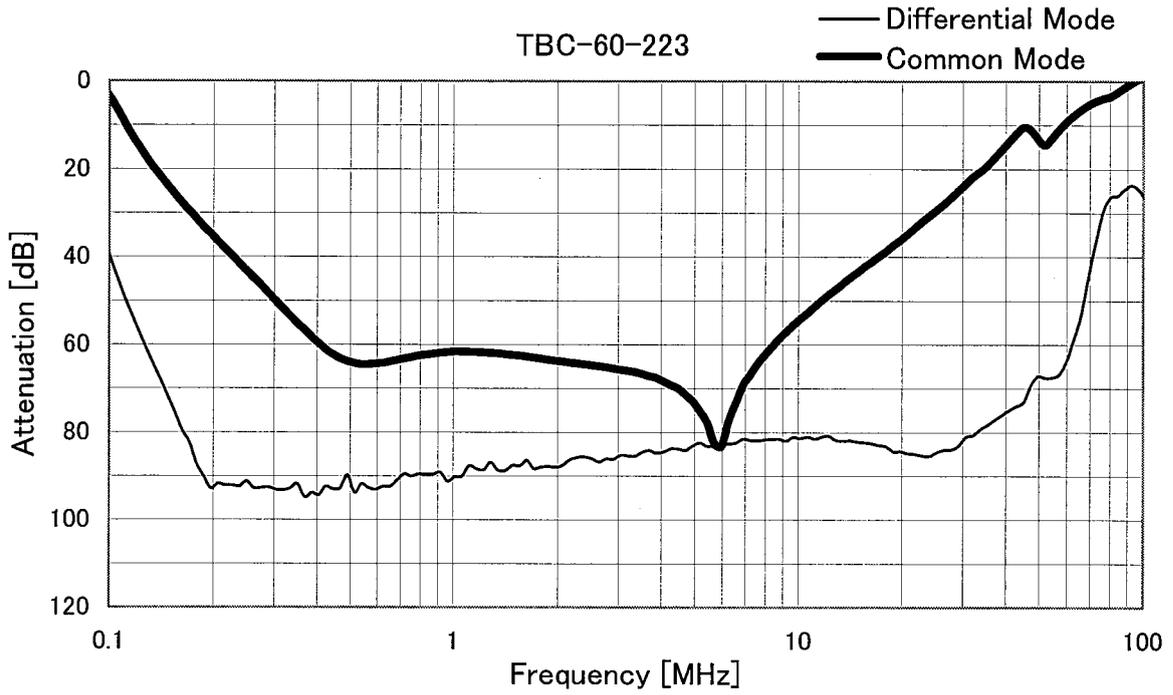



| | | | | |
|--------|--|-----------------------------|-------------------|----------|
| Model | | TBC-60-□□□ | Temperature | 25°C |
| Item | | Attenuation Characteristics | Testing Circuitry | Figure A |
| Object | | _____ | | |

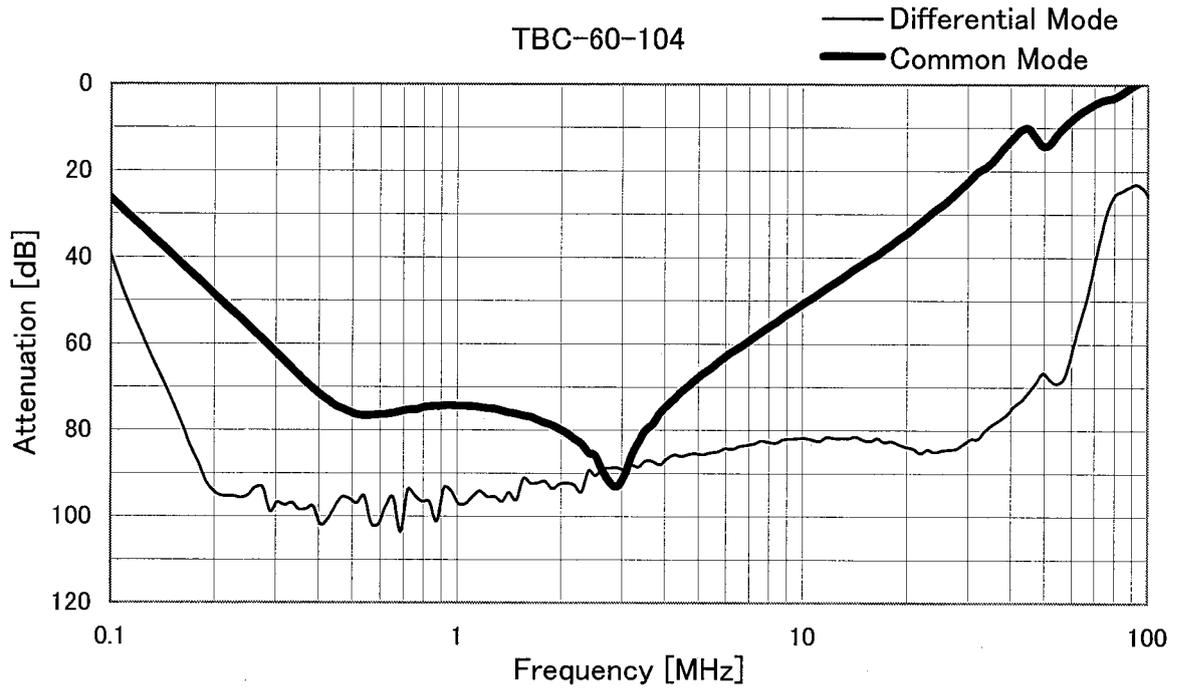



| | | | |
|--------|--|-----------------|--|
| Model | | TBC-60-□□□ | Temperature 25°C Testing Circuitry Figure B |
| Item | | Leakage Current | |
| Object | | _____ | |

1.Results

[mA]

| Model | Standards | Input Volt. | | | | | Note |
|------------|-----------|-------------|---------|---------|---------|---------|------|
| | | 200 [V] | 250 [V] | 400 [V] | 480 [V] | 500 [V] | |
| TBC-60-223 | UL1283 | 0.52 | 0.69 | 1.2 | 1.4 | 1.4 | |
| TBC-60-683 | UL1283 | 1.4 | 1.8 | 2.8 | 3.5 | 3.6 | |
| TBC-60-104 | UL1283 | 2.1 | 2.6 | 4.3 | 5.1 | 5.3 | |

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

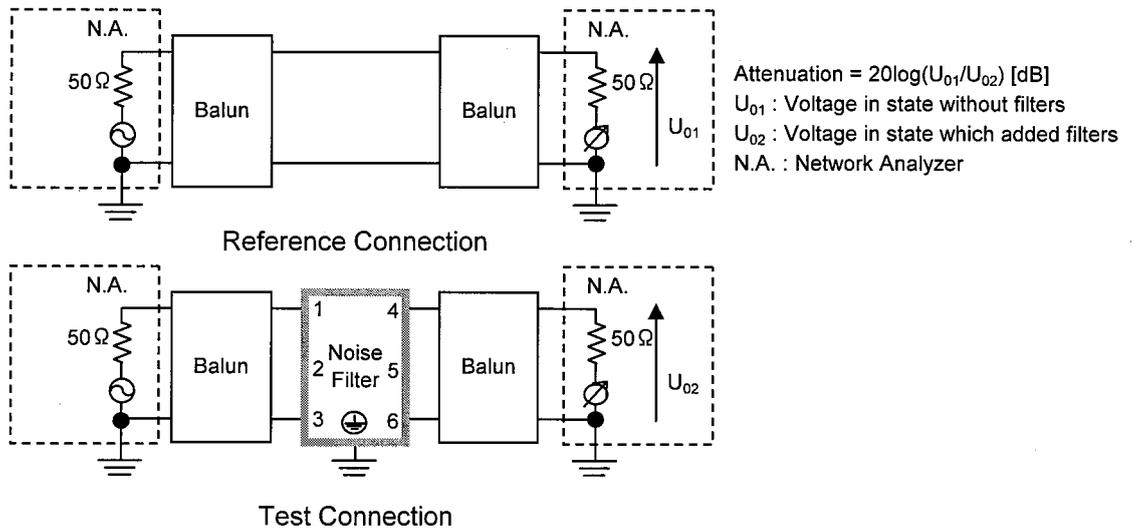


Figure A - 1 Differential mode attenuation measurement

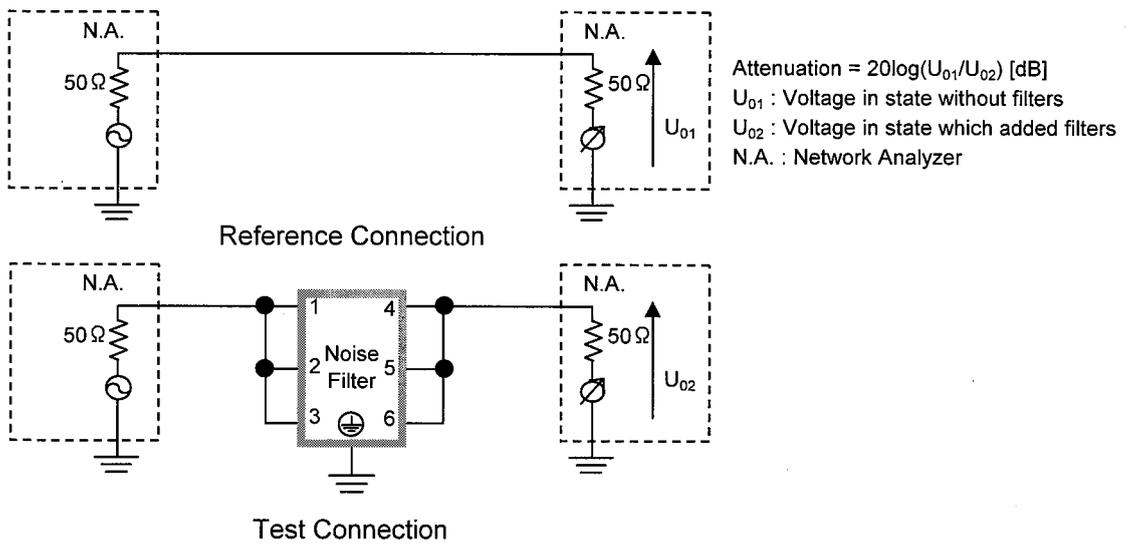


Figure A - 2 Common mode attenuation measurement

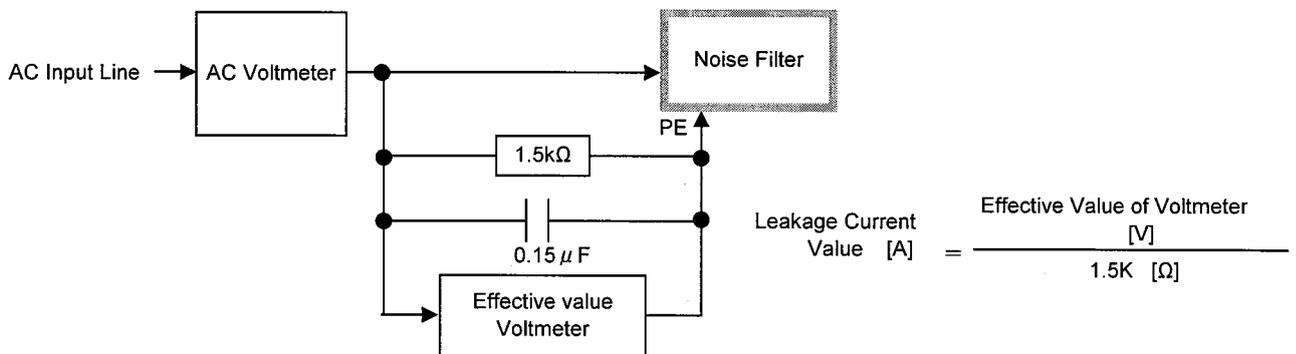


Figure B Leakage current measurement (UL1283)