



DATA SHEET		Date	17-Jul-20
Model	TUNS1200F48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Sawai

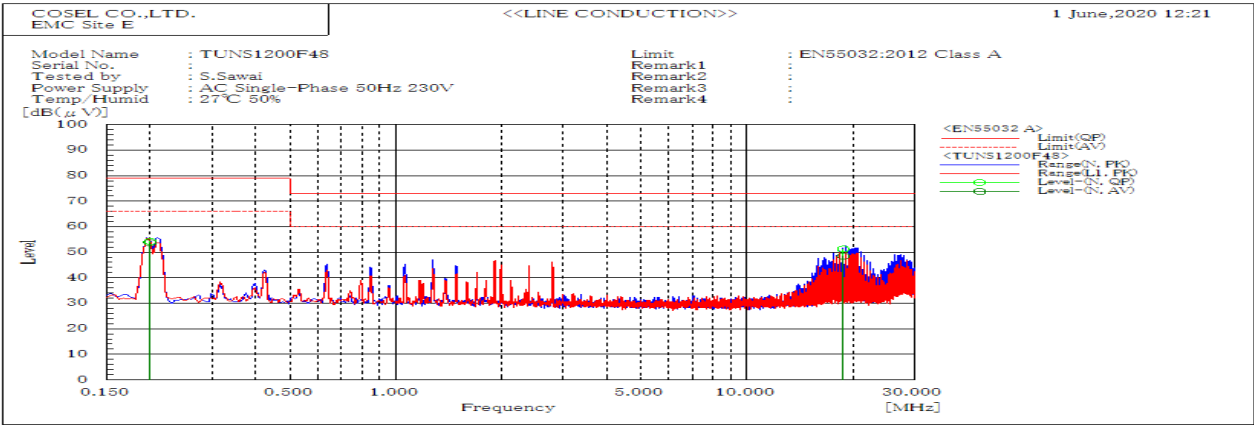


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.2	N	54.2	53.7	79	66	24.8	12.3	Pass	
18.792	N	51.2	48.4	73	60	21.8	11.6	Pass	

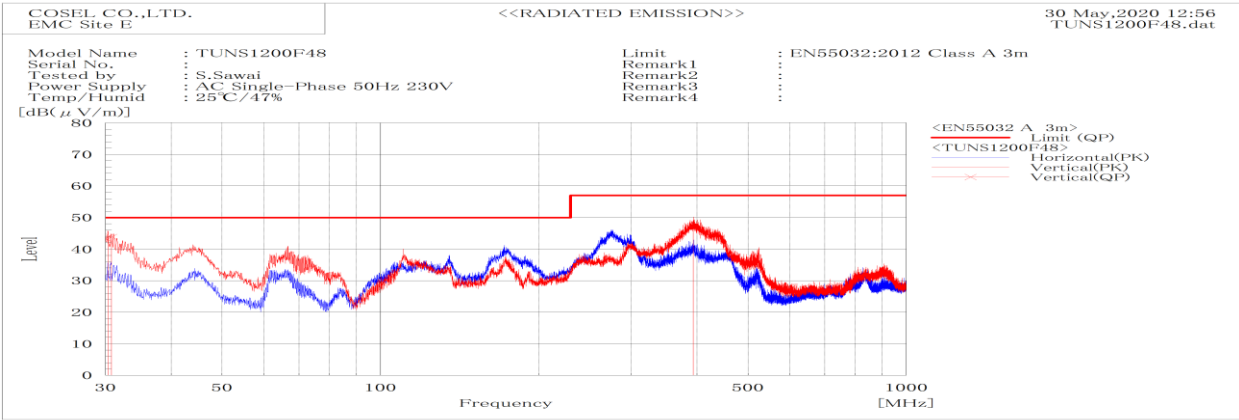

Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.013	V	Stable	43.4	50	6.6	Pass	105.3	341.5	
30.367	V	Stable	44	50	6	Pass	101.4	112.9	
30.792	V	Stable	43.8	50	6.2	Pass	101.4	316.3	
393.639	V	Stable	47.3	57	9.7	Pass	125.3	246.9	

DATA SHEET		Date	17-Jul-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Sawai

1. Line conduction

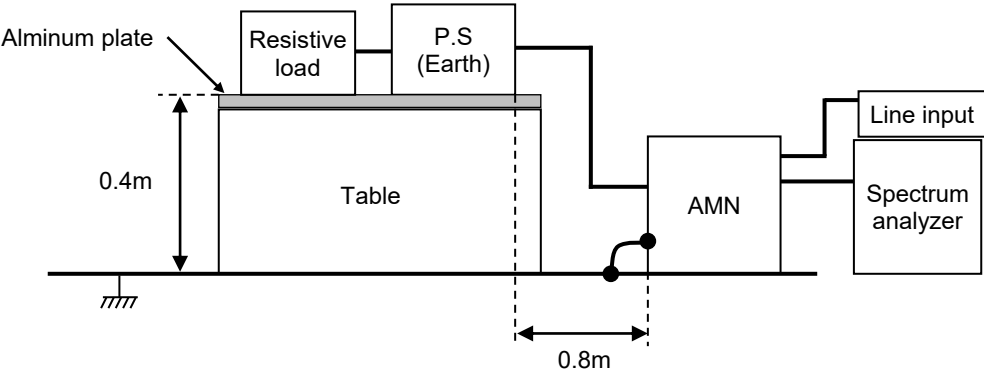

2. Radiated emission

