

Date : Nov.6,2015

Temperature increase of main components: 主要部品温度上昇

Model: TUXS150F series

1. Conditions

- (1) Input : AC 85 ~ 264 [V]
 (2) Output : Rated output
 (3) Aluminum base plate temp : 85 [°C] (Fig1.1)
 (4) Ambient temp : 25 [°C]

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			50V							
1	Input Diode	SS101	22.4						150	Junction Temp.
2	Choke Coil(PFC)	L201	13.5						150	
3	Rectified Diode(PFC)	D201	18.2						150	Junction Temp.
4	Switching Moss-FET	TR201	13						150	Junction Temp.
5	Switching Moss-FET	TR301	8.6						150	Junction Temp.
6	Transformer	T301	19						155	
7	Switching Moss-FET	TR501	22.4						150	Junction Temp.
8	Choke Coil(Output)	L501	7.7						150	Junction Temp.
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

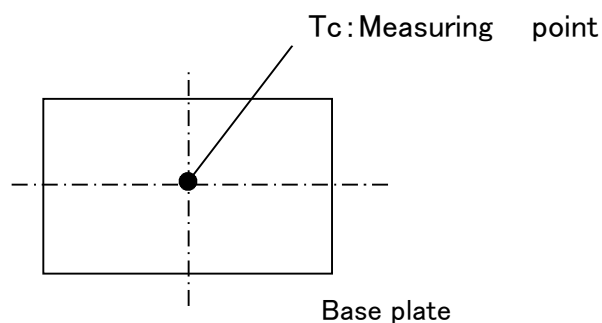


Fig.1.1 Measuring point of aluminum base plate temperature

* All information presented herein are not guaranteed.