


UMA30F-15 Expected Life (Aluminum electrolytic capacitor)

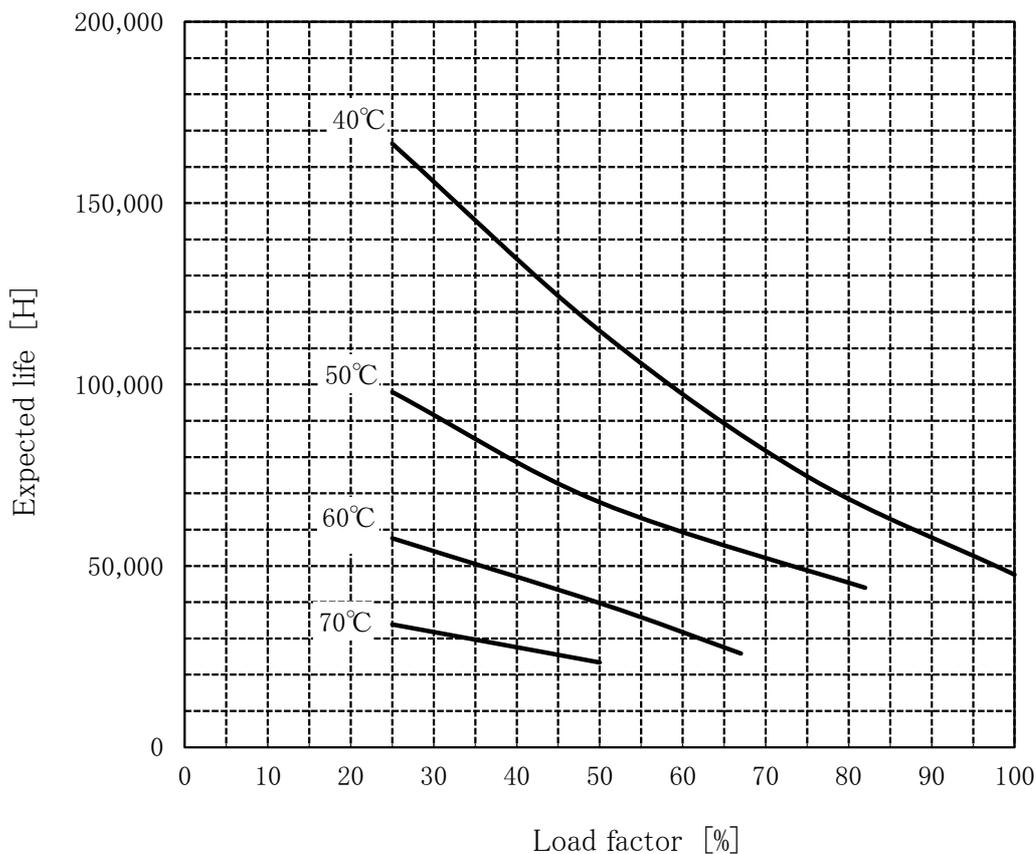

- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions


(1)Input voltage AC100-264V 50Hz

(2)Output voltage/
current

| DC OUTPUT | Load factor | | | |
|-----------|-------------|-------|-------|-------|
| | 100% | 75% | 50% | 25% |
| 15V | 2.00A | 1.50A | 1.00A | 0.50A |
| — | — | — | — | — |
| — | — | — | — | — |

(3)Cooling method Convection

(4)Mounting method Refer below

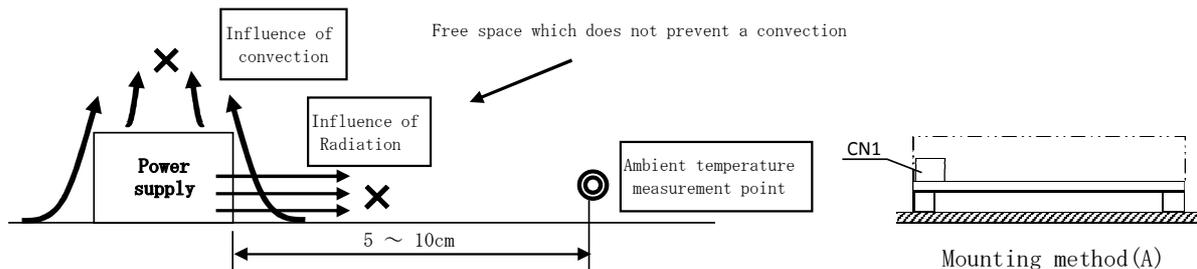

With the ambient temperature of graph, it measures in the environment of a figure.