

RADIATED EMISSION

Model Name : YAS1012E

Model No. :

Serial No. :

Detector : PEAK

Bands : 3

Polarization : Hori. & Vert.

Limit1: [EN 55022] Class B<3m>


Temperature : 25deg C

Humidity : 50%

Comment : AC 230V, LOAD 100%

Date : 1999/1/11 20:19

EMI Receiver(s) : R3261A

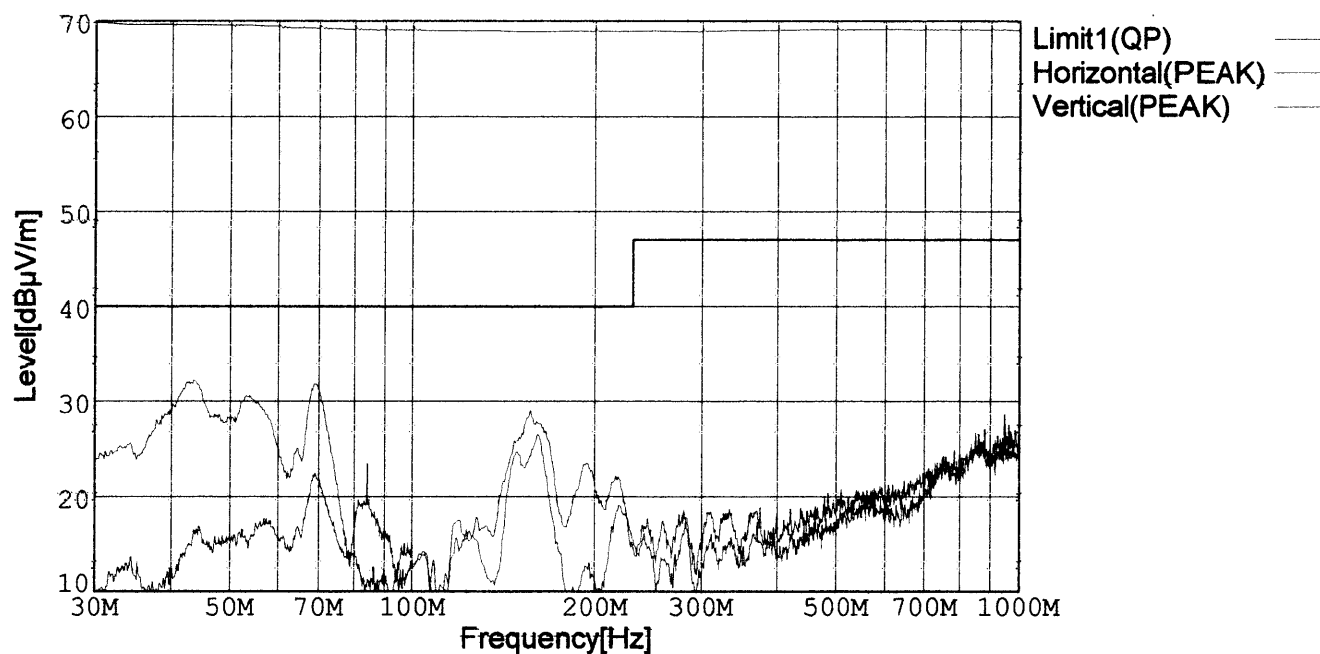

Frequency [MHz]	Meter Reading [dBμV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBμV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBμV/m]	Margin [dB]
43.139	46.1	11.1	-25.3	31.9	120	101	Vert.	40.0	8.1
68.895	50.9	5.2	-23.6	32.5	216	108	Vert.	40.0	7.5

RADIATED EMISSION

Model Name : YAS1012E

Model No. :

Serial No. :

Detector : QP

Points : 2

Polarization : Vertical

Limit1: [EN 55022] Class B<3m>


Temperature : 25deg C

Humidity : 50%

Comment : AC 230V, LOAD 100%

Date : 1999/1/11 20:19

EMI Receiver(s) : ESPC

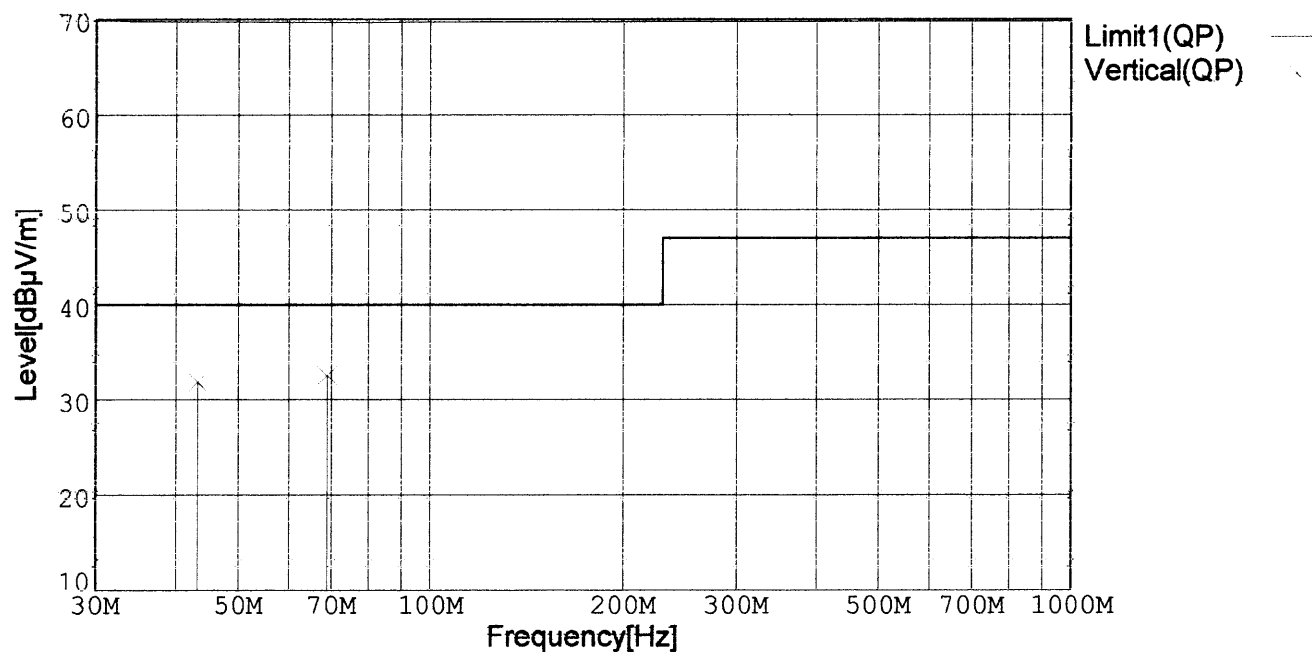

Frequency [MHz]	Meter Reading [dBμV]	Antenna Factor[dB]	Cable Loss[dB]	Level [dBμV/m]	Angle[°]	Height [cm]	Pola.	Limit [dBμV/m]	Margin [dB]
43.139	46.1	11.1	-25.3	31.9	120	101	Vert.	40.0	8.1
68.895	50.9	5.2	-23.6	32.5	216	108	Vert.	40.0	7.5

LINE CONDUCTION

Model Name : YAS1012E

Temperature : 25

Model No. :

Humidity : 50%

Serial No. :

Comment : AC 230V LOAD 100%

Detector : PEAK

Date : 1999/1/11 19:28


Bands : 4

EMI Receiver(s) : R3261A

Line Mode : VA/VB

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)

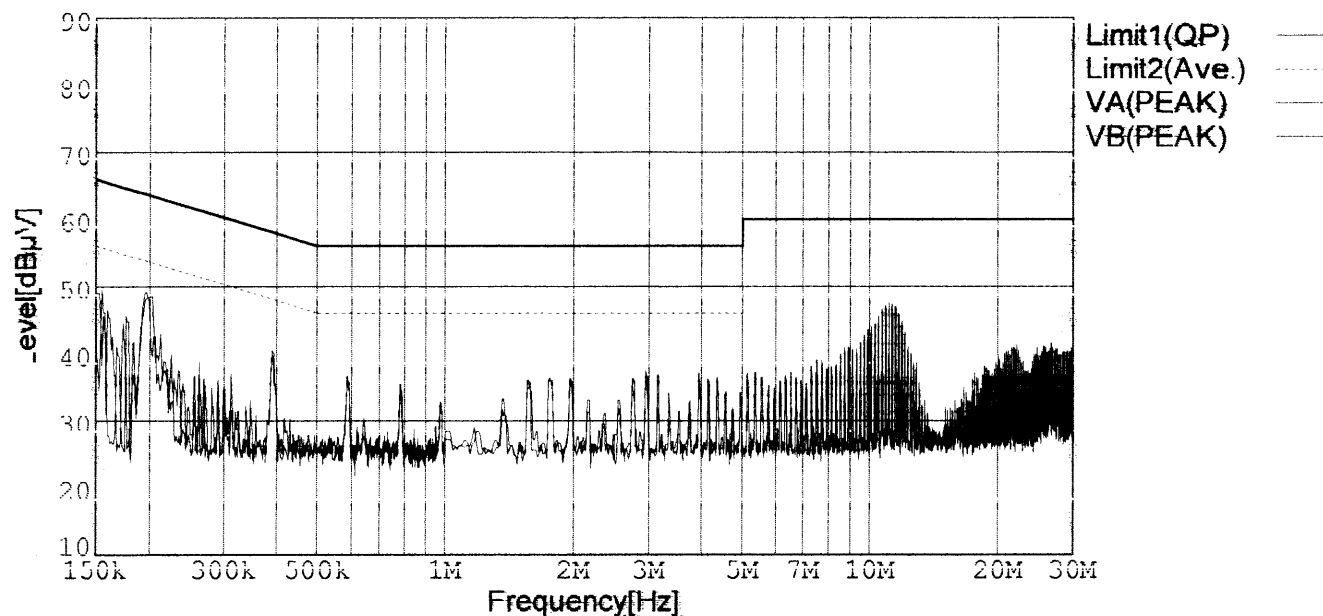

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.1944	35.2	29.7	10.3	45.5	40.0	VA	63.9	53.9	19.3	13.9
11.2379	34.4	34.0	10.5	44.9	44.5	VA	60.0	50.0	15.1	5.5

LINE CONDUCTION

Model Name : YAS1012E

Temperature : 25

Model No. :

Humidity : 50%

Serial No. :

Comment : AC 230V LOAD 100%

Detector : QP/Ave.

Date : 1999/1/11 19:28


Points : 2

EMI Receiver(s) : ESPC

Line Mode : VA

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)

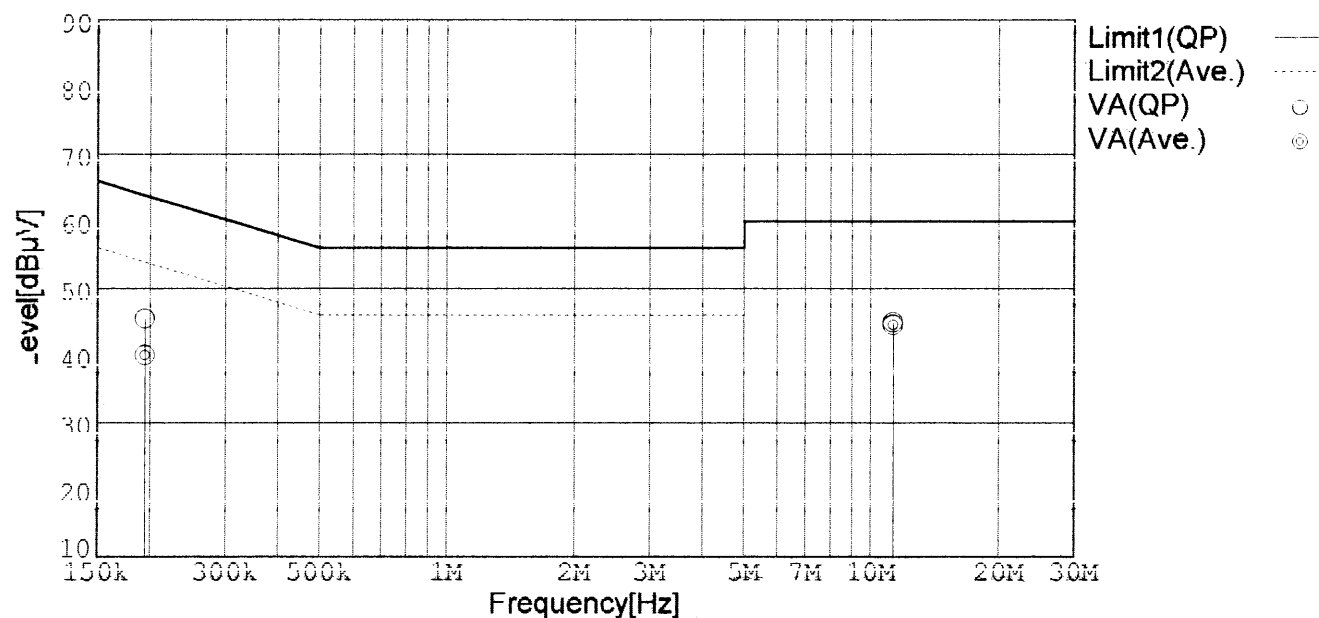

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1944	35.2	29.7	10.3	45.5	40.0	VA	63.8	53.8	18.3	13.8
11.2379	34.4	34.0	10.5	44.9	44.5	VA	60.0	50.0	15.1	5.5