



TEST DATA OF ZTS1R52405

(24.0V INPUT)

Regulated DC Power Supply

Date : Mar. 5. 1998

Approved by : N. Shiraishi
Design Manager

Prepared by : T. Iwari
Design Engineer

コーセル株式会社


COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

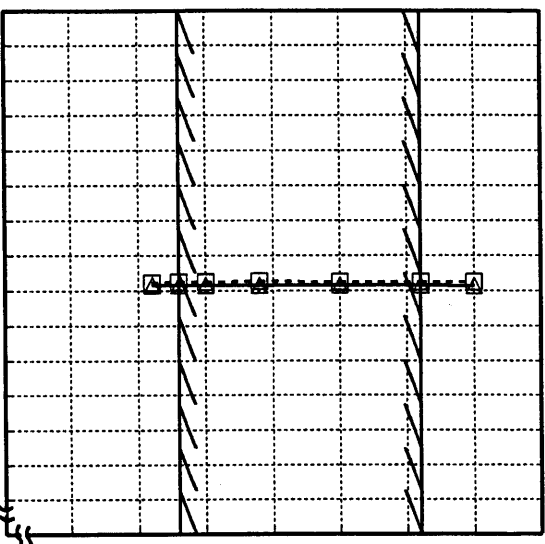Model		ZTS1R52405		Temperature		25℃																																														
Item		Line Regulation 静的入力変動		Testing Circuitry		Figure A																																														
Object		+5V0.3A																																																		
1. Graph				2. Values																																																
<div><div>-----□-----</div><div>Load 50%</div><div>-----△-----</div><div>Load 100%</div></div> <div><div><div>Output Voltage</div><div>[V]</div><div>5.120</div><div>5.100</div><div>5.080</div><div>5.060</div><div>5.040</div><div>5.020</div><div>5.000</div><div>0</div></div><div><div>Input Voltage</div><div>[V]</div><div>0</div><div>15</div><div>25</div><div>35</div><div>45</div></div></div>  <div>Note: Slanted line shows the range of the rated input voltage.</div> <div>(注)斜線は定格入力電圧範囲を示す。</div>				<table><tr><th>Input Voltage</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt.</th><th>Output Volt.</th><th>Output Volt.</th></tr><tr><th>[V]</th><th>[V]</th><th>[V]</th></tr><tr><td>16.0</td><td>5.052</td><td>5.051</td></tr><tr><td>18.0</td><td>5.052</td><td>5.052</td></tr><tr><td>20.0</td><td>5.052</td><td>5.051</td></tr><tr><td>24.0</td><td>5.053</td><td>5.052</td></tr><tr><td>30.0</td><td>5.052</td><td>5.051</td></tr><tr><td>36.0</td><td>5.052</td><td>5.051</td></tr><tr><td>40.0</td><td>5.052</td><td>5.051</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>				Input Voltage	Load 50%	Load 100%	Output Volt.	Output Volt.	Output Volt.	[V]	[V]	[V]	16.0	5.052	5.051	18.0	5.052	5.052	20.0	5.052	5.051	24.0	5.053	5.052	30.0	5.052	5.051	36.0	5.052	5.051	40.0	5.052	5.051	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage	Load 50%	Load 100%																																																		
Output Volt.	Output Volt.	Output Volt.																																																		
[V]	[V]	[V]																																																		
16.0	5.052	5.051																																																		
18.0	5.052	5.052																																																		
20.0	5.052	5.051																																																		
24.0	5.053	5.052																																																		
30.0	5.052	5.051																																																		
36.0	5.052	5.051																																																		
40.0	5.052	5.051																																																		
—	—	—																																																		
—	—	—																																																		
—	—	—																																																		
—	—	—																																																		
—	—	—																																																		

COSEL

Model

ZTS1R52405

Item

Efficiency 効率

Object


Temperature

25°C

Testing Circuitry

Figure A

1. Graph

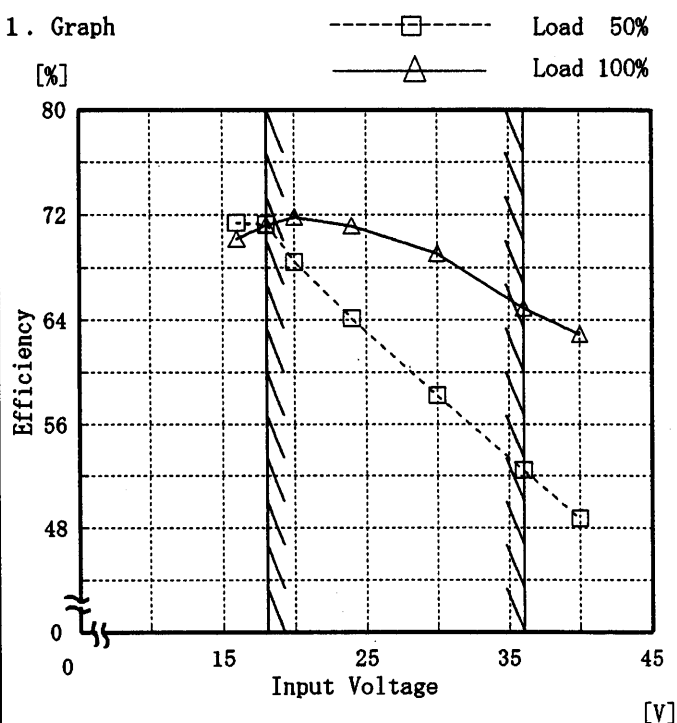

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
16.0	71.4	70.2
18.0	71.3	71.2
20.0	68.4	71.8
24.0	64.1	71.1
30.0	58.2	69.0
36.0	52.4	64.9
40.0	48.7	62.9
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

Model		ZTS1R52405																																																
Item	Load Regulation 静的負荷変動		Temperature 25℃ Testing Circuitry Figure A																																															
Object	+5V0.3A																																																	
1. Graph		2. Values																																																
<div><div><div>△</div><div>Input Volt. 18.0V</div></div><div><div>□</div><div>Input Volt. 24.0V</div></div><div><div>○</div><div>Input Volt. 36.0V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div></div><div>5.120</div><div>5.100</div><div>5.080</div><div>5.060</div><div>5.040</div><div>5.020</div><div>5.000</div><div>0</div></div></div><div><div></div><div>0</div><div>0.1</div><div>0.2</div><div>0.3</div><div>0.4</div><div>Load Current [A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>		<table><tr><td rowspan="2">Load Current [A]</td><td>Input Volt. 18.0[V]</td><td>Input Volt. 24.0[V]</td><td>Input Volt. 36.0[V]</td></tr><tr><td>Output Volt. [V]</td><td>Output Volt. [V]</td><td>Output Volt. [V]</td></tr><tr><td>0.00</td><td>5.053</td><td>5.054</td><td>5.054</td></tr><tr><td>0.06</td><td>5.053</td><td>5.053</td><td>5.053</td></tr><tr><td>0.12</td><td>5.053</td><td>5.052</td><td>5.052</td></tr><tr><td>0.18</td><td>5.052</td><td>5.052</td><td>5.052</td></tr><tr><td>0.24</td><td>5.052</td><td>5.052</td><td>5.052</td></tr><tr><td>0.30</td><td>5.052</td><td>5.052</td><td>5.052</td></tr><tr><td>0.33</td><td>5.051</td><td>5.052</td><td>5.051</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	5.053	5.054	5.054	0.06	5.053	5.053	5.053	0.12	5.053	5.052	5.052	0.18	5.052	5.052	5.052	0.24	5.052	5.052	5.052	0.30	5.052	5.052	5.052	0.33	5.051	5.052	5.051	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.00	5.053	5.054	5.054																																															
0.06	5.053	5.053	5.053																																															
0.12	5.053	5.052	5.052																																															
0.18	5.052	5.052	5.052																																															
0.24	5.052	5.052	5.052																																															
0.30	5.052	5.052	5.052																																															
0.33	5.051	5.052	5.051																																															
—	—	—	—																																															
—	—	—	—																																															
—	—	—	—																																															

COSEL

Model		ZTS1R52405	Temperature Testing Circuitry	25℃ Figure A
Item		Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)		
Object		+5V0.3A		

1. Graph

-----□-----

-----△-----

Input Volt. 18.0V

Input Volt. 36.0V

[mV]

Ripple Voltage

Load Current

[A]

2. Values

Load Current [A]	Input Volt. 18.0 [V]	Input Volt. 36.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	8
0.06	5	8
0.12	5	8
0.18	5	8
0.24	10	8
0.30	10	8
0.33	15	10
—	—	—
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

→T2


Ripple [mVp-p]

T1

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

COSEL

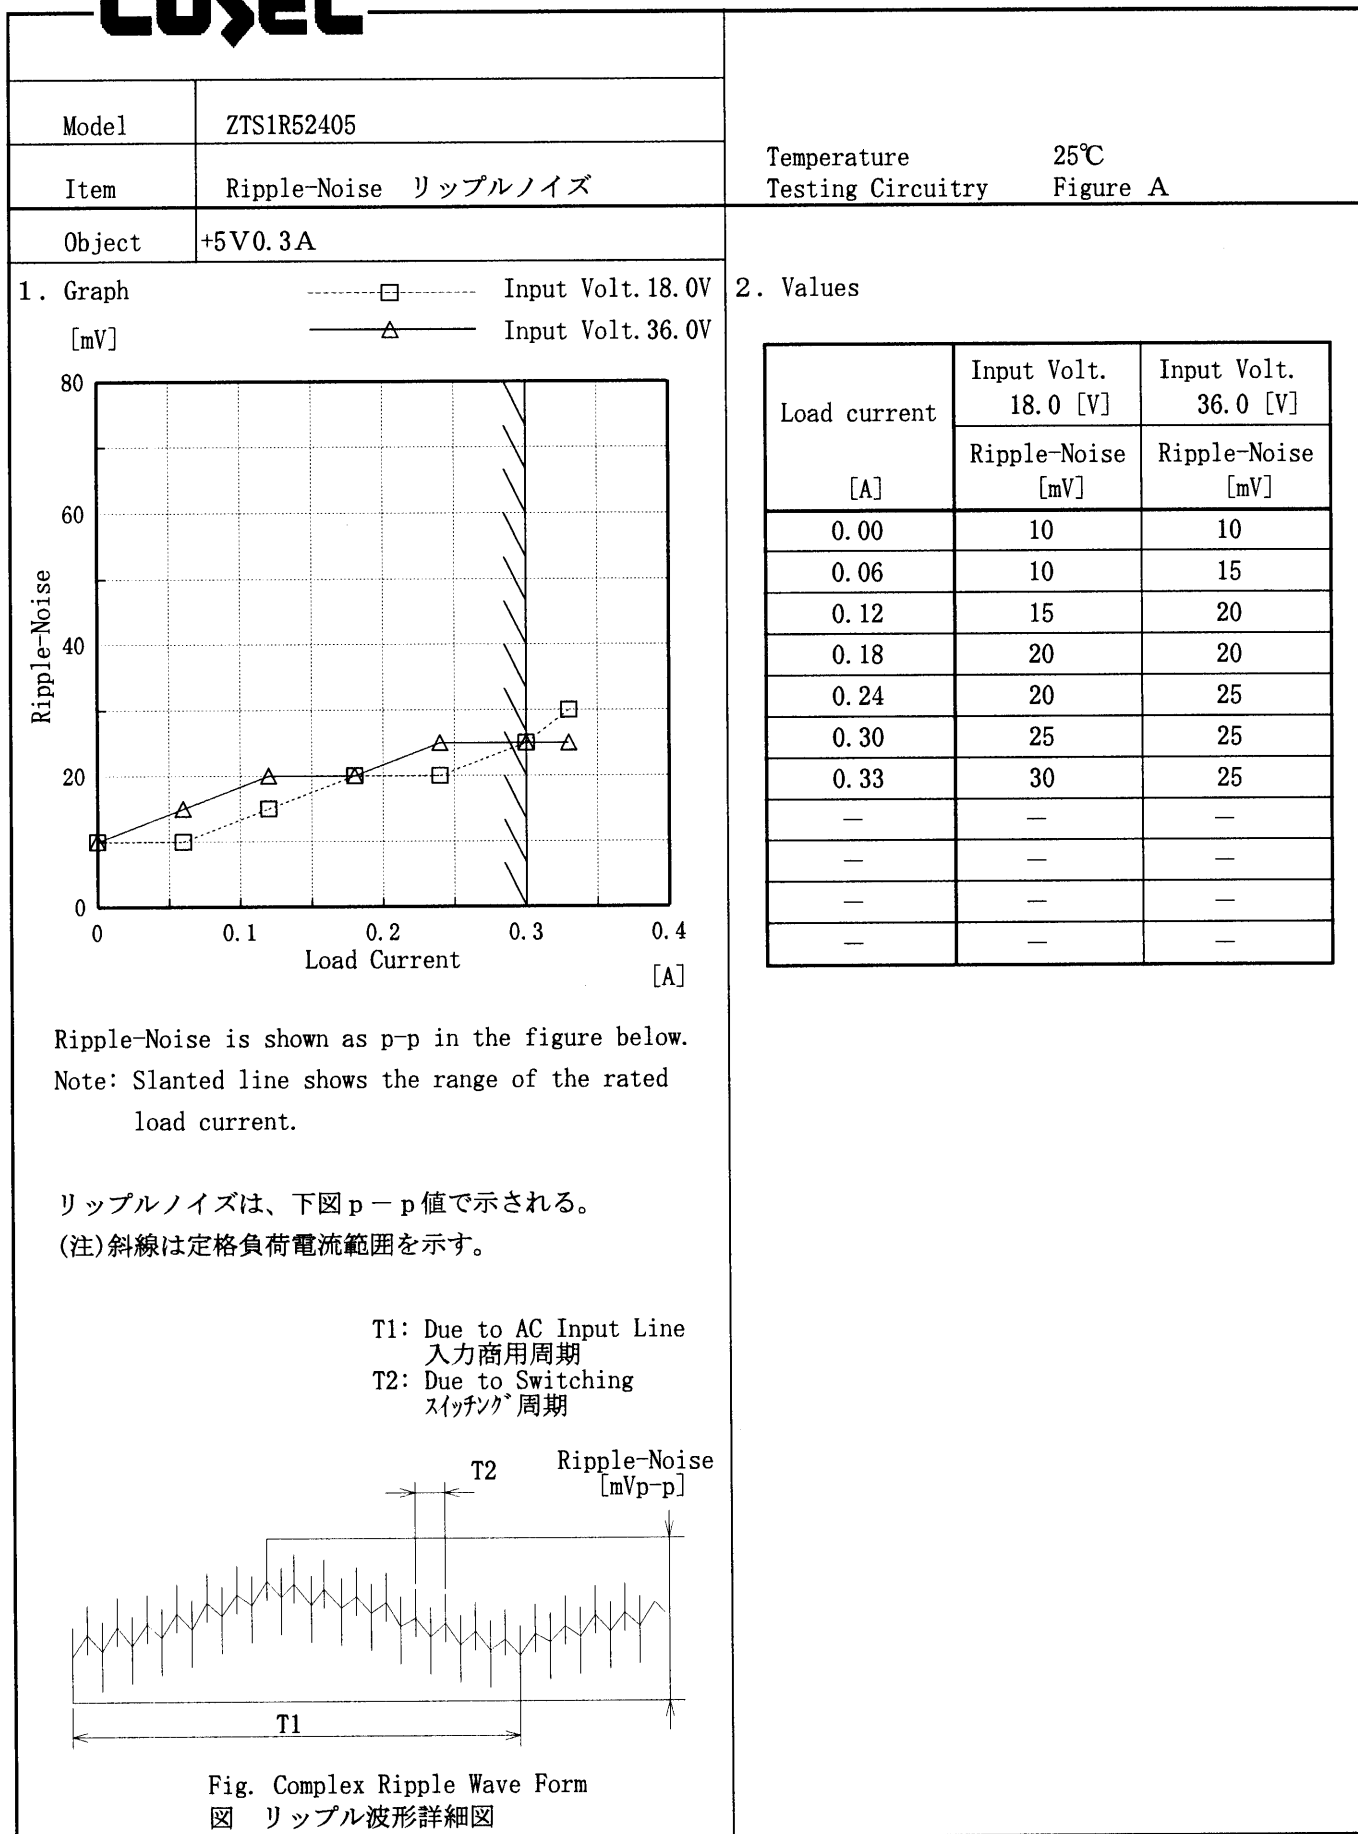

COSEL

Model

ZTS1R52405

Item

Overcurrent Protection
過電流保護

Object


+5V0.3A

Temperature

25°C

Testing Circuitry Figure A

1. Graph

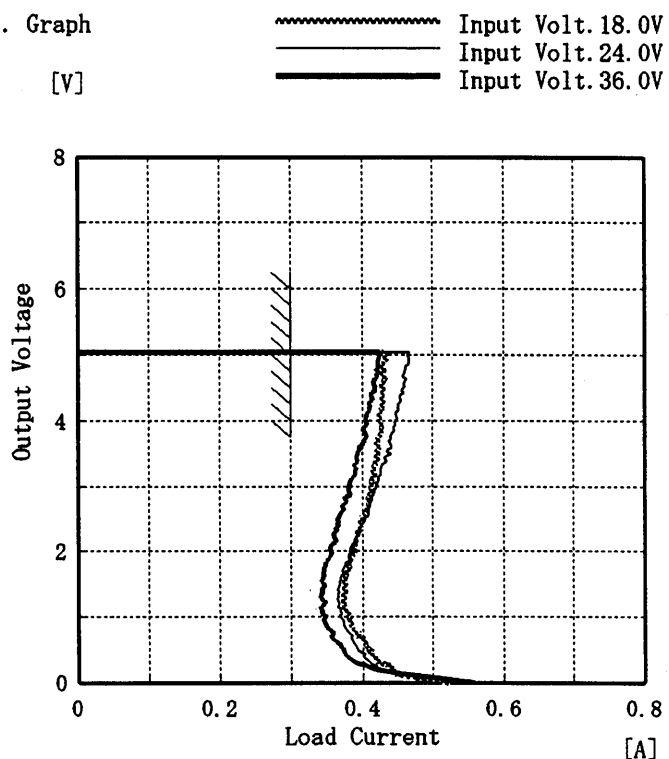

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
5.00	0.43	0.46	0.42
4.75	0.43	0.46	0.42
4.50	0.43	0.46	0.42
4.00	0.43	0.45	0.40
3.50	0.42	0.44	0.39
3.00	0.42	0.42	0.38
2.50	0.40	0.40	0.37
2.00	0.39	0.38	0.35
1.50	0.38	0.37	0.35
1.00	0.38	0.37	0.35
0.50	0.41	0.39	0.37
0.00	0.57	0.60	0.60

COSEL

Model	ZTS1R52405	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+5V0.3A	

Input Volt. 24.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


100 mV/div

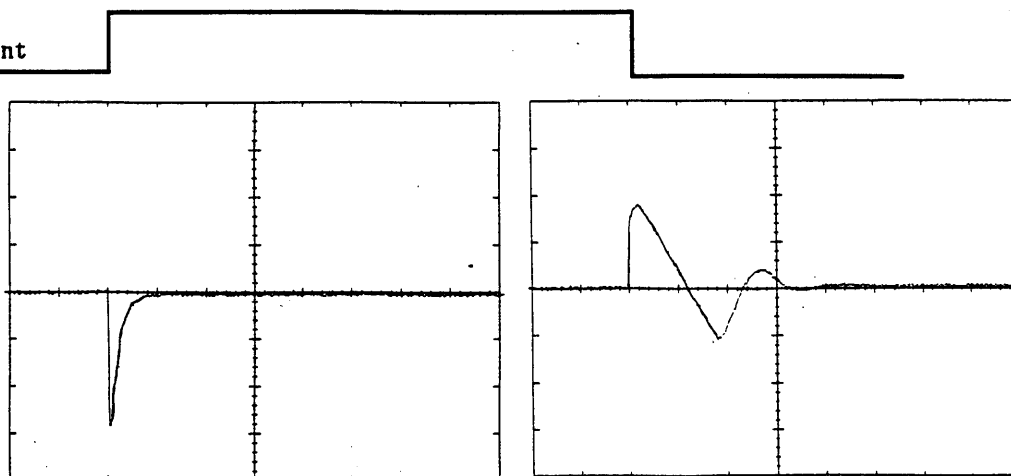

Min. Load ↔

Load 50 %


100 mV/div

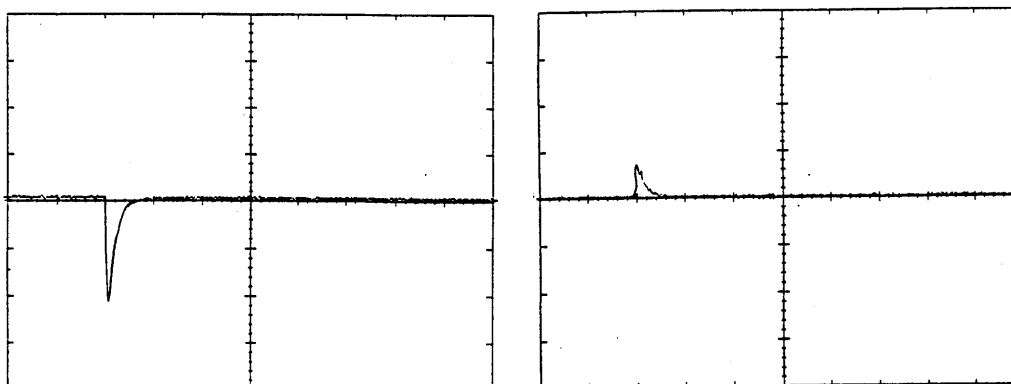

Load 50% ↔

Load 100 %

100 mV/div

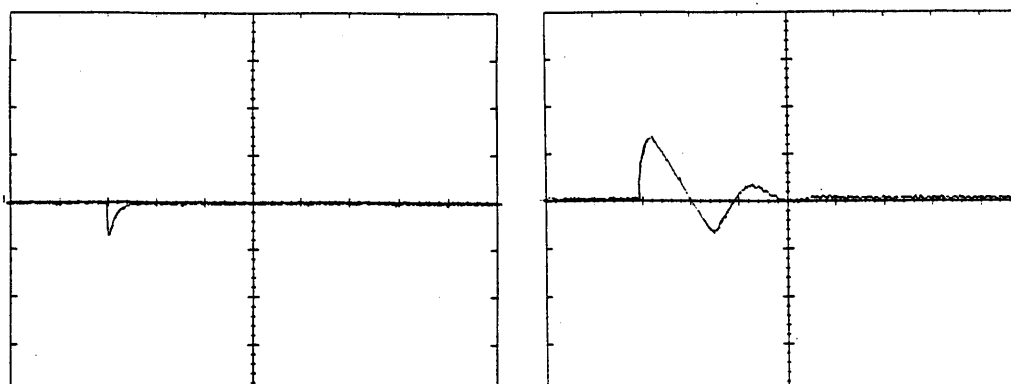

1 mS/div

COSEL

Model ZTS1R52405


Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C
Testing Circuitry Figure A

Object +5V0.3A

1. Graph


Input Volt. 18.0 V

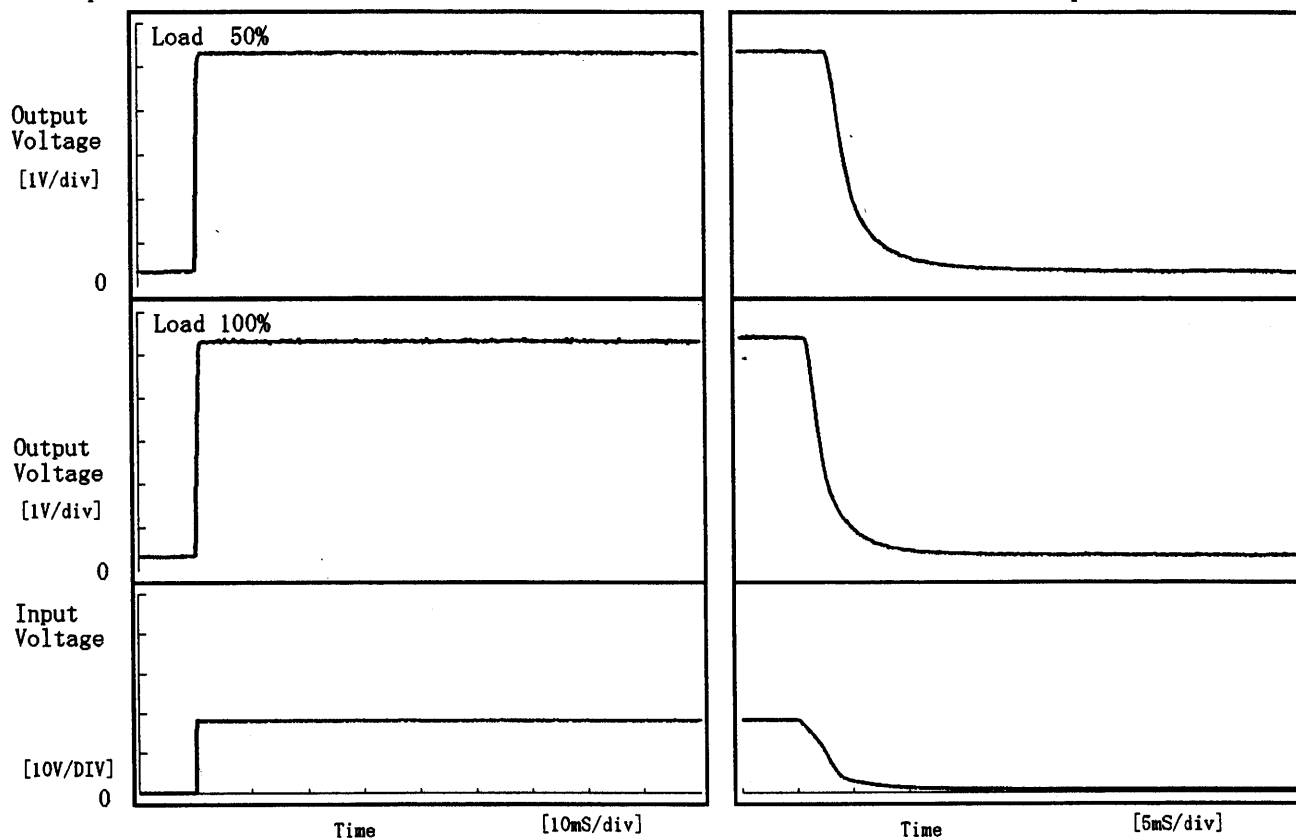

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.05	0.50	0.55	3.30	5.63
100 %	0.05	0.65	0.70	1.28	4.65

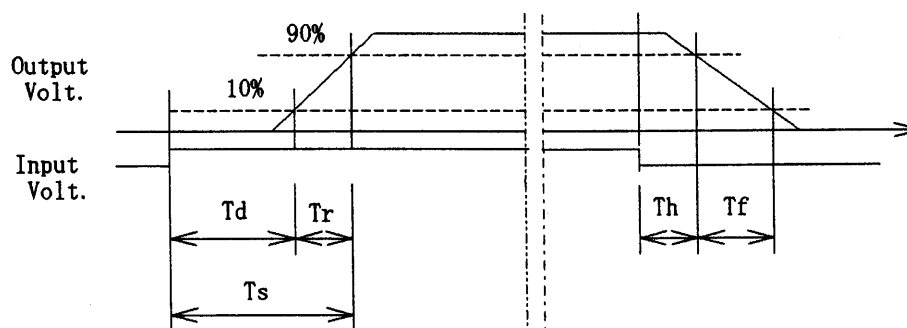

COSEL

Model

ZTS1R52405

Item


Ambient Temperature Drift
周囲温度変動

Object

+5V0.3A

Testing Circuitry Figure A

1. Graph

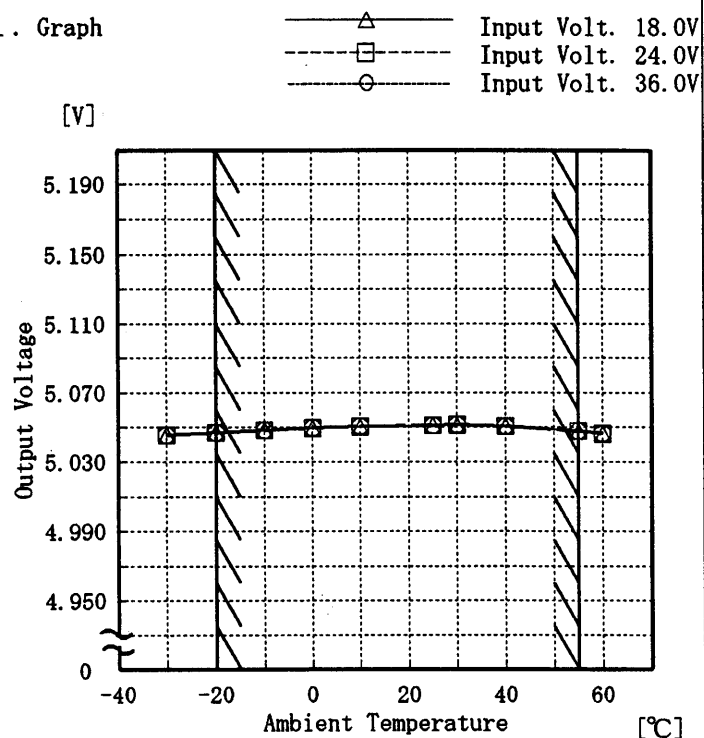

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Temperature	Input Volt. 18.0[V]	Input Volt. 24.0[V]	Input Volt. 36.0[V]
[°C]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	5.046	5.046	5.046
-20	5.047	5.047	5.047
-10	5.048	5.048	5.048
0	5.049	5.050	5.050
10	5.050	5.050	5.050
25	5.051	5.051	5.051
30	5.051	5.052	5.052
40	5.050	5.051	5.051
55	5.048	5.048	5.048
60	5.046	5.046	5.046
—	—	—	—

COSEL


Model ZTS1R52405

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +5V0.3A

Testing Circuitry Figure A

1. Graph

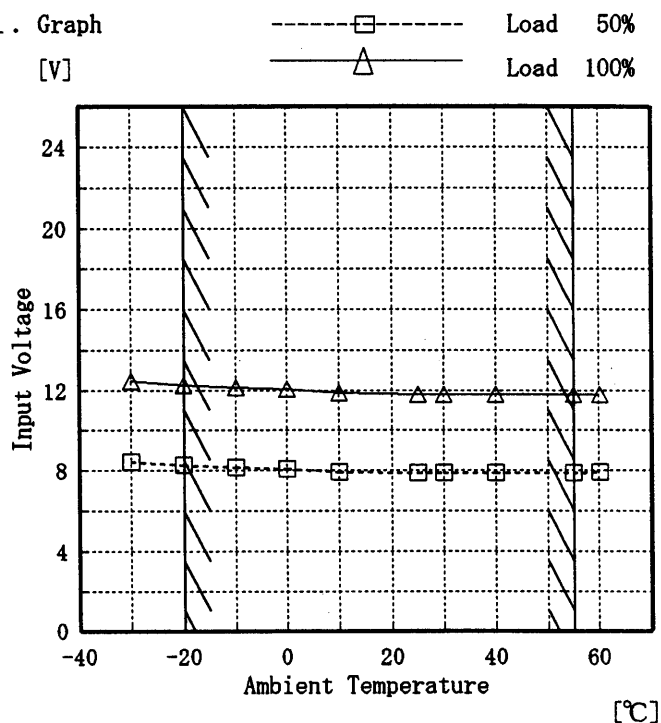

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	8.4	12.5
-20	8.3	12.3
-10	8.2	12.1
0	8.1	12.1
10	7.9	11.9
25	7.9	11.8
30	7.9	11.8
40	7.9	11.8
55	7.9	11.8
60	7.9	11.8
—	—	—

COSEL

Model ZTS1R52405		Testing Circuitry Figure A																																				
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object	+5V0.3A																																					
1. Graph <div> <div> <div>-----□----- Load 50%</div> <div>-----△----- Load 100%</div> </div> <div> <div>[mV]</div> <div> <div>80</div> <div>60</div> <div>40</div> <div>20</div> <div>0</div> </div> <div> <div>Ripple Voltage</div> <div>Ambient Temperature [°C]</div> </div> <div> <div>Input Volt. 18.0 V</div> </div> </div> </div>		2. Values <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-30</td><td>10</td><td>25</td></tr> <tr><td>-20</td><td>8</td><td>20</td></tr> <tr><td>-10</td><td>8</td><td>15</td></tr> <tr><td>0</td><td>8</td><td>15</td></tr> <tr><td>10</td><td>5</td><td>15</td></tr> <tr><td>25</td><td>5</td><td>10</td></tr> <tr><td>30</td><td>5</td><td>10</td></tr> <tr><td>40</td><td>5</td><td>10</td></tr> <tr><td>55</td><td>5</td><td>10</td></tr> <tr><td>60</td><td>5</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-30	10	25	-20	8	20	-10	8	15	0	8	15	10	5	15	25	5	10	30	5	10	40	5	10	55	5	10	60	5	10	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																				
-30	10	25																																				
-20	8	20																																				
-10	8	15																																				
0	8	15																																				
10	5	15																																				
25	5	10																																				
30	5	10																																				
40	5	10																																				
55	5	10																																				
60	5	10																																				
—	—	—																																				
Note: Slanted line shows the range of the rated ambient temperature. (注) 斜線は定格周囲温度範囲を示す。																																						

COSEL

Model

ZTS1R52405

Item

Time Lapse Drift 経時ドリフト

Object

+5V0.3A


Temperature

25 °C

Testing Circuitry

Figure A

1. Graph

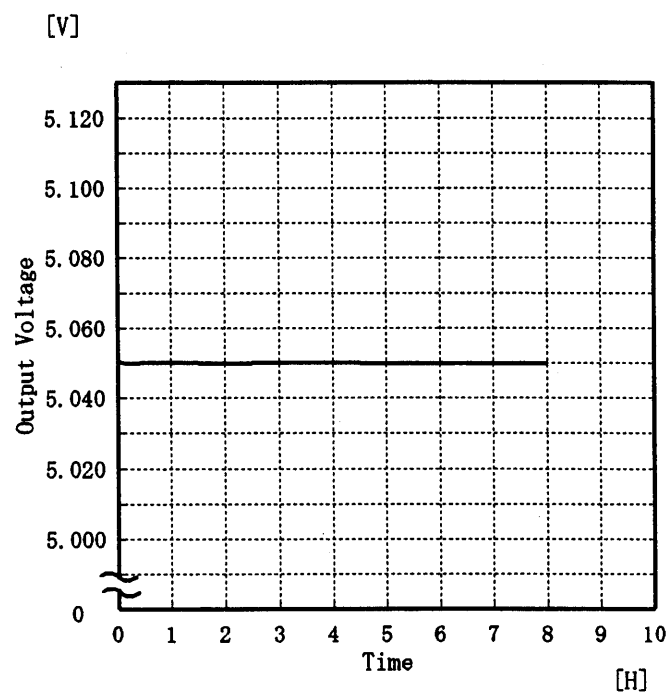

2. Values

Time since start [H]	Output Voltage [V]
0.0	5.051
0.5	5.050
1.0	5.050
2.0	5.050
3.0	5.050
4.0	5.050
5.0	5.050
6.0	5.050
7.0	5.050
8.0	5.050

COSEL

Model		ZTS1R52405	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5V0.3A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 18.0~36.0 V

Load Current : 0.0~0.3 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 18.0~36.0 V


負荷電流 : 0.0~0.3 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	36.0	0.0	5.054	±4	±0.1
Minimum Voltage	55	36.0	0.3	5.047		

COSEL

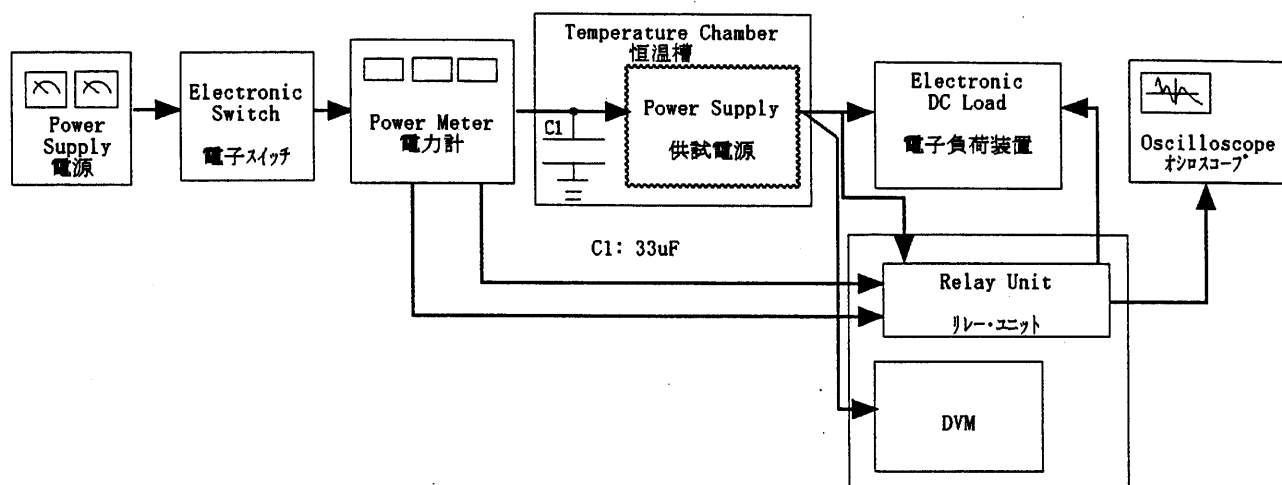

Data Acquisition/Control Unit
データ集録システム

Figure A