



# TEST DATA OF LDA75F-24 (100V INPUT)

Regulated DC Power Supply

Date : Aug. 20. 1999

Approved by : H. Yamaguchi  
Design Manager

Prepared by : J. Asano  
Design Engineer

**コーセル株式会社**  
**COSEL CO., LTD.**

## CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Hold-Up Time . . . . .	6
出力保持時間	
7. Instantaneous Interruption Compensation . . . . .	7
瞬時停電保障	
8. Load Regulation . . . . .	8
静的負荷変動	
9. Ripple Voltage (by Load Current) . . . . .	9
リップル電圧 (負荷特性)	
10. Ripple-Noise . . . . .	10
リップルノイズ	
11. Overcurrent Protection . . . . .	11
過電流保護	
12. Overvoltage Protection . . . . .	12
過電圧保護	
13. Inrush Current . . . . .	13
突入電流	
14. Dynamic Load Responce . . . . .	14
動的負荷変動	
15. Rise and Fall Time . . . . .	15
立上り、立下がり時間	
16. Ambient Temperature Drift . . . . .	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage . . . . .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature) . . . . .	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift . . . . .	19
経時ドリフト	
20. Output Voltage Accuracy . . . . .	20
定電圧精度	
21. Condensation . . . . .	21
結露特性	
22. Leakage Current . . . . .	22
漏洩電流	
23. Line Noise Tolerance . . . . .	23
入力雑音耐量	
24. Conducted Emission . . . . .	24
雑音端子電圧	
25. Figure of Testing Circuitry . . . . .	25
測定回路図	

(Final Page 26 )

# COSEL

Model		LDA75F-24		Temperature		25℃	
Item		Line Regulation  静的入力変動		Testing Circuitry		Figure A	
Object		+24.0V3.2A					
1. Graph				2. Values			

□

Load 50%

—△—

Load 100%

Output Voltage

[V]

24.18

24.16

24.14

24.12

24.10

24.08

24.06

0

0

80

90

100

110

120

130

140

150

Input Voltage

[V]

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
75	24.110	24.108
80	24.110	24.108
85	24.110	24.108
90	24.110	24.108
100	24.110	24.109
110	24.110	24.109
120	24.110	24.108
132	24.110	24.108
140	24.110	24.108

**COSEL**

Model		LDA75F-24		Temperature		25℃																																																								
Item		Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry		Figure A																																																								
Output																																																														
1. Graph				2. Values																																																										
<div><div><div>△</div><div>Input Volt. 85V</div></div><div><div>□</div><div>Input Volt. 100V</div></div><div><div>○</div><div>Input Volt. 132V</div></div></div> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>0.071</td><td>0.071</td><td>0.070</td></tr><tr><td>0.60</td><td>0.401</td><td>0.363</td><td>0.308</td></tr><tr><td>1.20</td><td>0.716</td><td>0.634</td><td>0.520</td></tr><tr><td>1.80</td><td>1.048</td><td>0.922</td><td>0.747</td></tr><tr><td>2.40</td><td>1.381</td><td>1.213</td><td>0.979</td></tr><tr><td>3.00</td><td>1.710</td><td>1.502</td><td>1.210</td></tr><tr><td>3.20</td><td>1.822</td><td>1.600</td><td>1.291</td></tr><tr><td>3.52</td><td>1.997</td><td>1.753</td><td>1.414</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	0.071	0.071	0.070	0.60	0.401	0.363	0.308	1.20	0.716	0.634	0.520	1.80	1.048	0.922	0.747	2.40	1.381	1.213	0.979	3.00	1.710	1.502	1.210	3.20	1.822	1.600	1.291	3.52	1.997	1.753	1.414	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.00	0.071	0.071	0.070																																																											
0.60	0.401	0.363	0.308																																																											
1.20	0.716	0.634	0.520																																																											
1.80	1.048	0.922	0.747																																																											
2.40	1.381	1.213	0.979																																																											
3.00	1.710	1.502	1.210																																																											
3.20	1.822	1.600	1.291																																																											
3.52	1.997	1.753	1.414																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

# COSEL

Model		LDA75F-24		Temperature		25℃																																																								
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>—△—</div><div>Input Volt. 85V</div><div>□</div><div>Input Volt. 100V</div><div>○</div><div>Input Volt. 132V</div></div> <div><div><div><div>Input Power [W]</div><div>200</div><div>150</div><div>100</div><div>50</div><div>0</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div></div><div><div>Load Current [A]</div></div></div></div> <div><div>Note: Slanted line shows the range of the rated load current</div><div>(注) 斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>2.25</td><td>2.51</td><td>3.18</td></tr><tr><td>0.60</td><td>18.98</td><td>19.26</td><td>20.10</td></tr><tr><td>1.20</td><td>35.60</td><td>35.67</td><td>36.29</td></tr><tr><td>1.80</td><td>52.44</td><td>52.38</td><td>52.90</td></tr><tr><td>2.40</td><td>69.63</td><td>69.39</td><td>69.50</td></tr><tr><td>3.00</td><td>87.30</td><td>86.60</td><td>86.40</td></tr><tr><td>3.20</td><td>93.10</td><td>92.40</td><td>92.00</td></tr><tr><td>3.52</td><td>102.90</td><td>101.90</td><td>101.30</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	2.25	2.51	3.18	0.60	18.98	19.26	20.10	1.20	35.60	35.67	36.29	1.80	52.44	52.38	52.90	2.40	69.63	69.39	69.50	3.00	87.30	86.60	86.40	3.20	93.10	92.40	92.00	3.52	102.90	101.90	101.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.00	2.25	2.51	3.18																																																											
0.60	18.98	19.26	20.10																																																											
1.20	35.60	35.67	36.29																																																											
1.80	52.44	52.38	52.90																																																											
2.40	69.63	69.39	69.50																																																											
3.00	87.30	86.60	86.40																																																											
3.20	93.10	92.40	92.00																																																											
3.52	102.90	101.90	101.30																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

# COSEL

Model		LDA75F-24		Temperature		25℃																																	
Item		Efficiency 効率		Testing Circuitry		Figure A																																	
Object																																							
1. Graph				2. Values																																			
<div><div>□ Load 50%</div><div>△ Load 100%</div></div> <p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>83.2</td><td>82.2</td></tr><tr><td>80</td><td>83.4</td><td>83.1</td></tr><tr><td>85</td><td>83.3</td><td>83.4</td></tr><tr><td>90</td><td>83.4</td><td>83.8</td></tr><tr><td>100</td><td>83.4</td><td>84.1</td></tr><tr><td>110</td><td>83.2</td><td>84.3</td></tr><tr><td>120</td><td>82.8</td><td>84.3</td></tr><tr><td>132</td><td>82.3</td><td>84.4</td></tr><tr><td>140</td><td>82.0</td><td>84.3</td></tr></table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	75	83.2	82.2	80	83.4	83.1	85	83.3	83.4	90	83.4	83.8	100	83.4	84.1	110	83.2	84.3	120	82.8	84.3	132	82.3	84.4	140	82.0	84.3
Input Voltage [V]	Efficiency [%]																																						
	Load 50%	Load 100%																																					
75	83.2	82.2																																					
80	83.4	83.1																																					
85	83.3	83.4																																					
90	83.4	83.8																																					
100	83.4	84.1																																					
110	83.2	84.3																																					
120	82.8	84.3																																					
132	82.3	84.4																																					
140	82.0	84.3																																					

**COSEL**

Model		LDA75F-24		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>△</div><div>Input Volt. 85V</div></div><div><div>□</div><div>Input Volt. 100V</div></div><div><div>○</div><div>Input Volt. 132V</div></div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.60</td><td>77.5</td><td>76.2</td><td>73.2</td></tr><tr><td>1.20</td><td>81.9</td><td>81.9</td><td>80.4</td></tr><tr><td>1.80</td><td>83.4</td><td>83.5</td><td>82.7</td></tr><tr><td>2.40</td><td>83.7</td><td>84.0</td><td>83.9</td></tr><tr><td>3.00</td><td>83.4</td><td>84.1</td><td>84.3</td></tr><tr><td>3.20</td><td>83.4</td><td>84.0</td><td>84.4</td></tr><tr><td>3.52</td><td>83.0</td><td>83.8</td><td>84.3</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.60	77.5	76.2	73.2	1.20	81.9	81.9	80.4	1.80	83.4	83.5	82.7	2.40	83.7	84.0	83.9	3.00	83.4	84.1	84.3	3.20	83.4	84.0	84.4	3.52	83.0	83.8	84.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																													
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																											
0.60	77.5	76.2	73.2																																																											
1.20	81.9	81.9	80.4																																																											
1.80	83.4	83.5	82.7																																																											
2.40	83.7	84.0	83.9																																																											
3.00	83.4	84.1	84.3																																																											
3.20	83.4	84.0	84.4																																																											
3.52	83.0	83.8	84.3																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											
—	—	—	—																																																											

# COSEL

LDA75F-24			Temperature 25℃																																	
Item Hold-Up Time 出力保持時間			Testing Circuitry Figure A																																	
Object +24.0V3.2A																																				
1. Graph			2. Values																																	
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <div><p>[mS]</p><p>Hold-Up Time</p><p>Input Voltage [V]</p></div>			<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>75</td><td>20</td><td>10</td></tr><tr><td>80</td><td>25</td><td>13</td></tr><tr><td>85</td><td>31</td><td>16</td></tr><tr><td>90</td><td>36</td><td>19</td></tr><tr><td>100</td><td>49</td><td>26</td></tr><tr><td>110</td><td>63</td><td>33</td></tr><tr><td>120</td><td>78</td><td>42</td></tr><tr><td>132</td><td>98</td><td>53</td></tr><tr><td>140</td><td>113</td><td>61</td></tr></table>		Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	75	20	10	80	25	13	85	31	16	90	36	19	100	49	26	110	63	33	120	78	42	132	98	53	140	113	61
Input Voltage [V]	Hold-Up Time [mS]																																			
	Load 50%	Load 100%																																		
75	20	10																																		
80	25	13																																		
85	31	16																																		
90	36	19																																		
100	49	26																																		
110	63	33																																		
120	78	42																																		
132	98	53																																		
140	113	61																																		
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																				




# COSEL


Model		LDA75F-24		Temperature		25℃																																																				
Item		Instantaneous Interruption Compensation 瞬時停電保障		Testing Circuitry		Figure A																																																				
Object		+24.0V3.2A																																																								
1. Graph				2. Values																																																						
<div><div><div>△</div><div>□</div><div>○</div></div><div>Input Volt. 85 V Input Volt. 100 V Input Volt. 132 V</div></div> <div><div><div>[mS]</div><div>Instantaneous Compensation Time</div><div>1000</div><div>100</div><div>10</div><div>1</div></div><div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>[A]</div></div><div><div>0.6</div><div>1.2</div><div>1.8</div><div>2.4</div><div>3.0</div><div>3.2</div><div>3.52</div></div><div><div>85</div><div>100</div><div>132</div></div></div> <div><div>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</div><div>Note:Slanted line shows the range of the rated load current.</div></div> <div><div>瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [mS]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr><tr><td>0.60</td><td>86</td><td>136</td><td>270</td></tr><tr><td>1.20</td><td>44</td><td>70</td><td>140</td></tr><tr><td>1.80</td><td>29</td><td>47</td><td>97</td></tr><tr><td>2.40</td><td>20</td><td>31</td><td>71</td></tr><tr><td>3.00</td><td>14</td><td>23</td><td>55</td></tr><tr><td>3.20</td><td>14</td><td>23</td><td>52</td></tr><tr><td>3.52</td><td>12</td><td>21</td><td>46</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Time [mS]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	—	—	—	0.60	86	136	270	1.20	44	70	140	1.80	29	47	97	2.40	20	31	71	3.00	14	23	55	3.20	14	23	52	3.52	12	21	46	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																									
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																							
0.00	—	—	—																																																							
0.60	86	136	270																																																							
1.20	44	70	140																																																							
1.80	29	47	97																																																							
2.40	20	31	71																																																							
3.00	14	23	55																																																							
3.20	14	23	52																																																							
3.52	12	21	46																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

**COSEL**

COSEL																																																		
Model	LDA75F-24	Temperature	25℃																																															
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																															
Object	+24.0V3.2A																																																	
1. Graph		2. Values																																																
<div><div><div>△</div><div>Input Volt. 85 V</div></div><div><div>□</div><div>Input Volt. 100 V</div></div><div><div>○</div><div>Input Volt. 132 V</div></div></div> <div><div><div>Output Voltage [V]</div><div><div>Load Current [A]</div></div></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>0.00</td><td>24.114</td><td>24.114</td><td>24.114</td></tr><tr><td>0.60</td><td>24.112</td><td>24.112</td><td>24.112</td></tr><tr><td>1.20</td><td>24.111</td><td>24.111</td><td>24.111</td></tr><tr><td>1.80</td><td>24.111</td><td>24.111</td><td>24.110</td></tr><tr><td>2.40</td><td>24.110</td><td>24.110</td><td>24.110</td></tr><tr><td>3.00</td><td>24.109</td><td>24.109</td><td>24.109</td></tr><tr><td>3.20</td><td>24.109</td><td>24.109</td><td>24.109</td></tr><tr><td>3.52</td><td>24.109</td><td>24.109</td><td>24.109</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	0.00	24.114	24.114	24.114	0.60	24.112	24.112	24.112	1.20	24.111	24.111	24.111	1.80	24.111	24.111	24.110	2.40	24.110	24.110	24.110	3.00	24.109	24.109	24.109	3.20	24.109	24.109	24.109	3.52	24.109	24.109	24.109	—	—	—	—	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																															
0.00	24.114	24.114	24.114																																															
0.60	24.112	24.112	24.112																																															
1.20	24.111	24.111	24.111																																															
1.80	24.111	24.111	24.110																																															
2.40	24.110	24.110	24.110																																															
3.00	24.109	24.109	24.109																																															
3.20	24.109	24.109	24.109																																															
3.52	24.109	24.109	24.109																																															
—	—	—	—																																															
—	—	—	—																																															
Note: Slanted line shows the range of the rated load current.																																																		
(注)斜線は定格負荷電流範囲を示す。																																																		

# COSEL

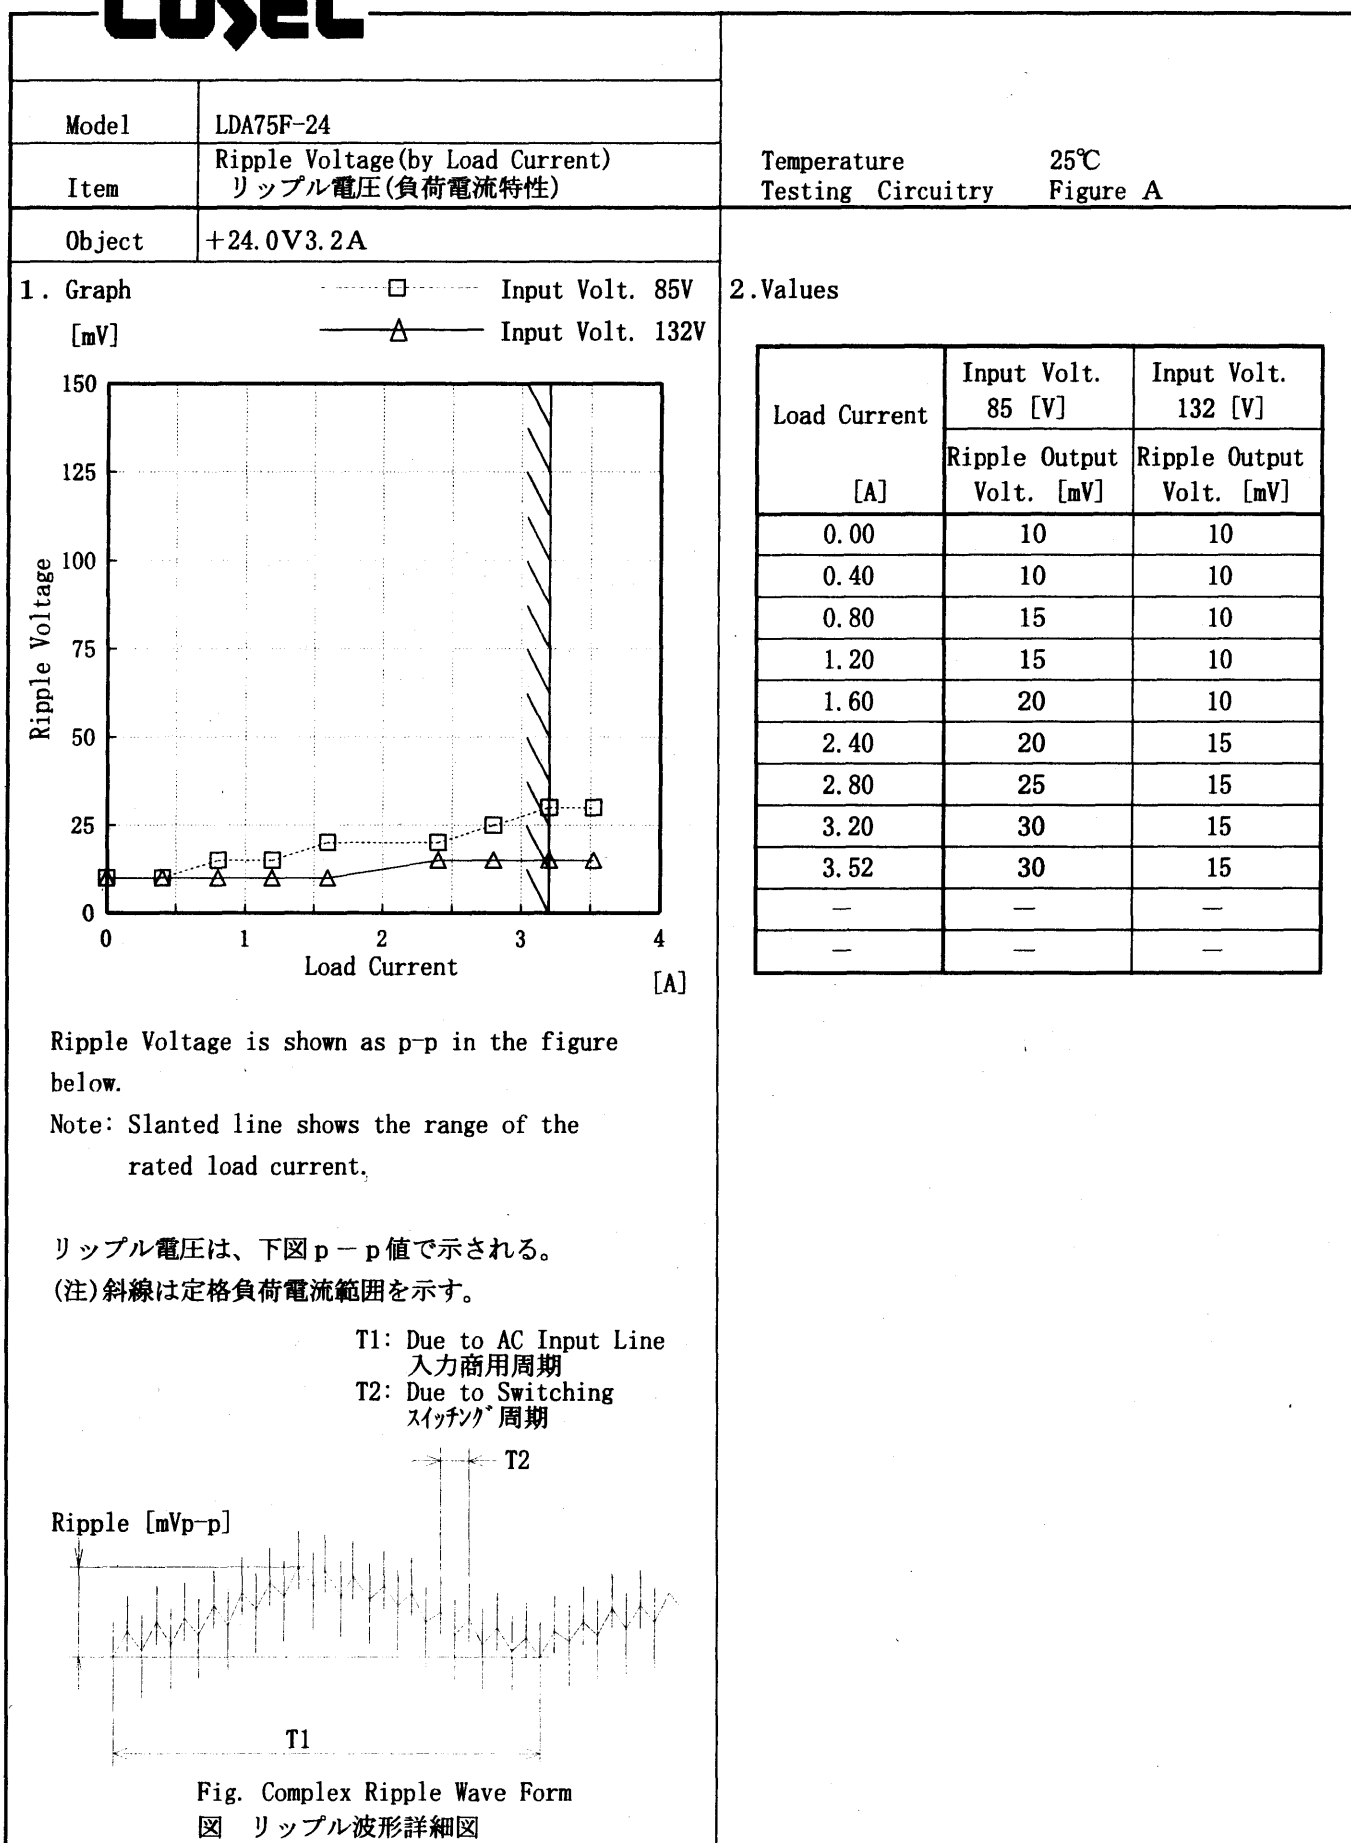

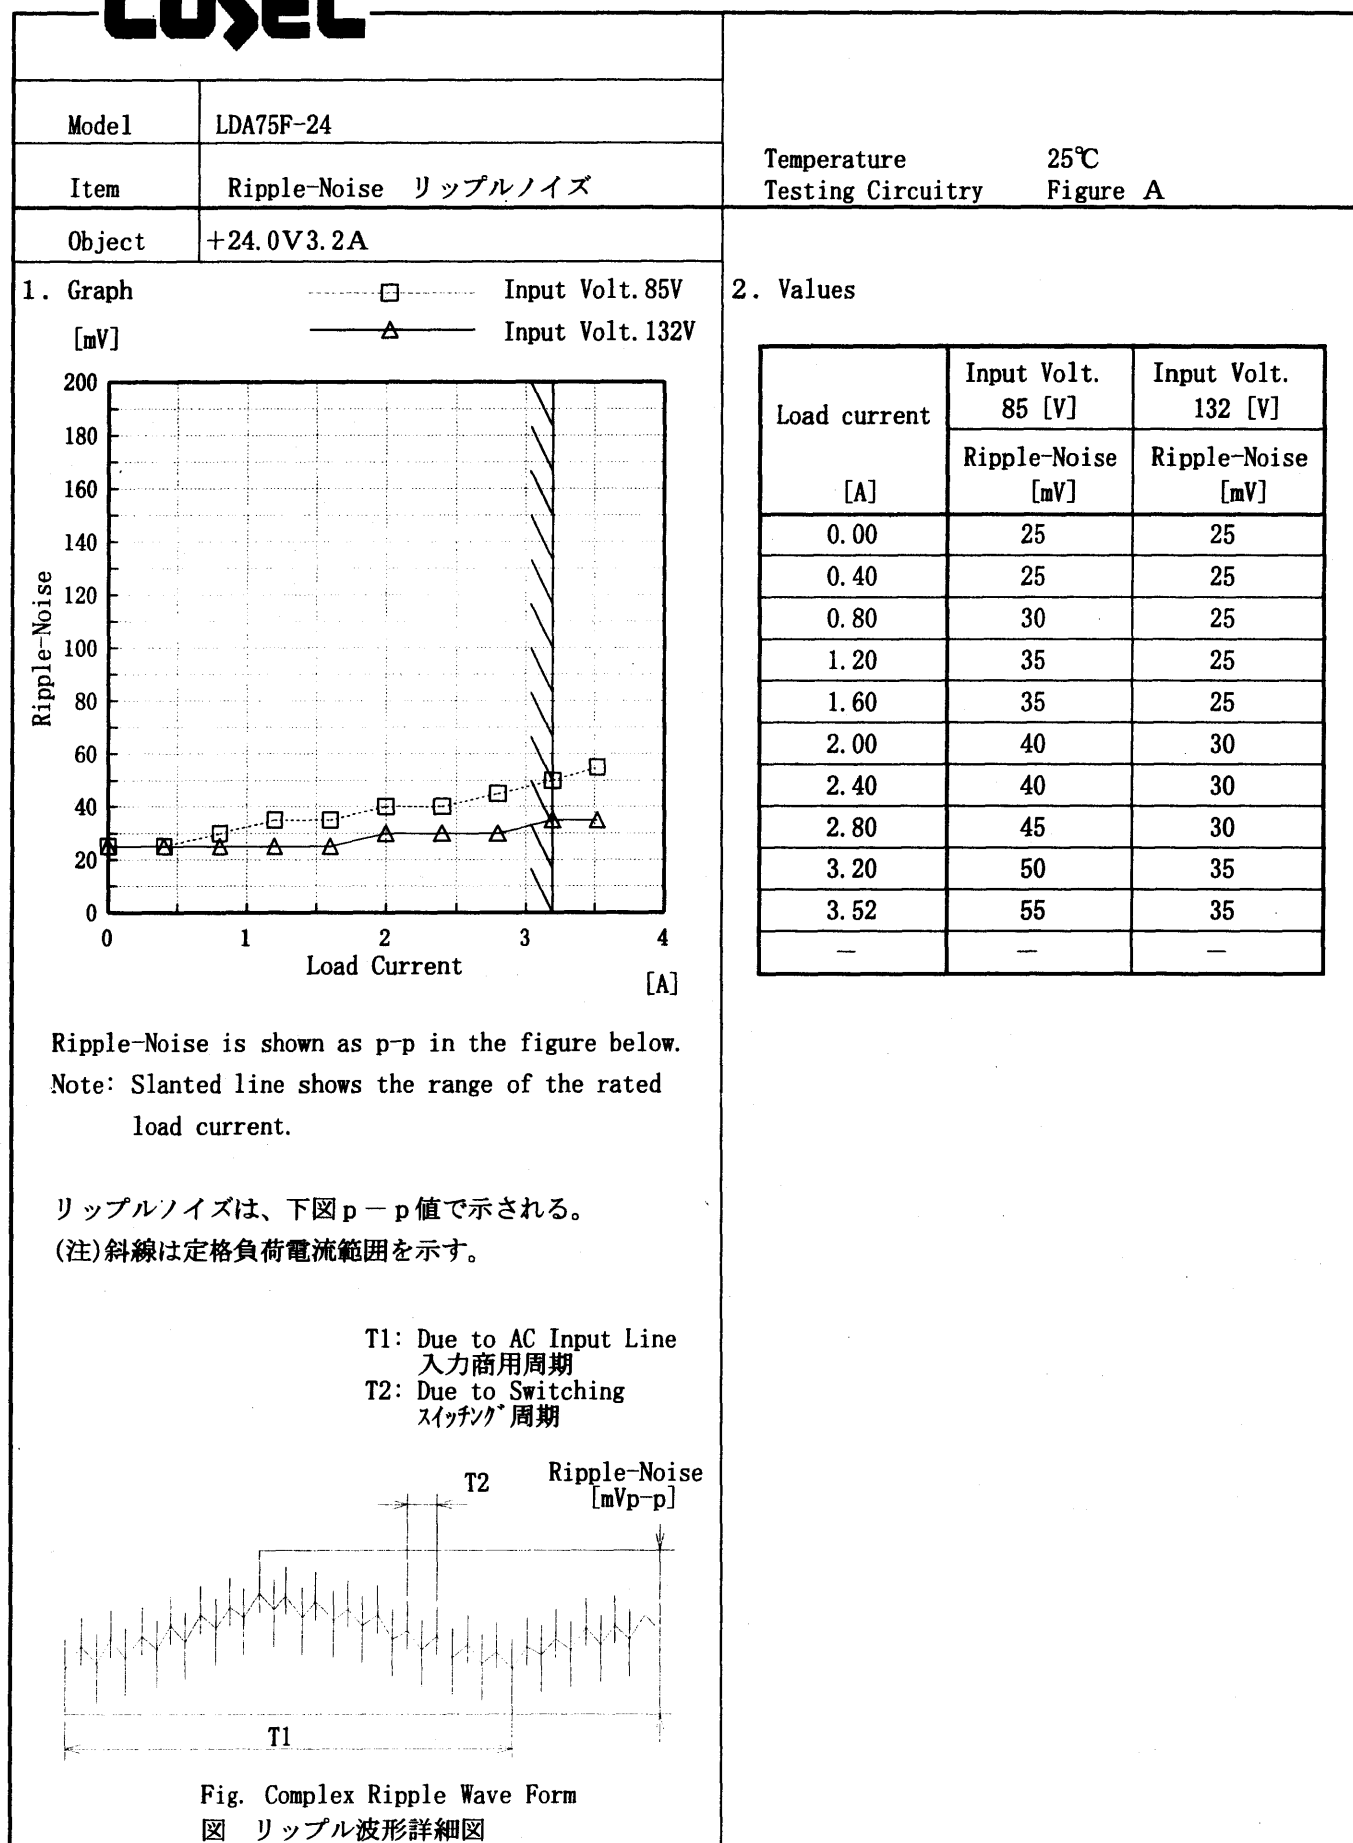**COSEL**

**COSEL**

Model	LDA75F-24																																																										
Item	Overcurrent Protection 過電流保護	Temperature 25℃ Testing Circuitry Figure A																																																									
Object	+24.0V3.2A																																																										
1. Graph		2. Values																																																									
<div><div>----- Input Volt. 85 V</div><div>----- Input Volt. 100 V</div><div>----- Input Volt. 132 V</div></div> <div><div>[V]</div><div>40.0</div><div>30.0</div><div>20.0</div><div>10.0</div><div>0.0</div><div>Output Voltage</div></div> <div><div>0</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div><div>Load Current</div><div>[A]</div></div>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>24.00</td><td>4.26</td><td>4.23</td><td>4.23</td></tr><tr><td>22.80</td><td>4.26</td><td>4.24</td><td>4.25</td></tr><tr><td>21.60</td><td>4.26</td><td>4.25</td><td>4.26</td></tr><tr><td>19.20</td><td>4.28</td><td>4.27</td><td>4.28</td></tr><tr><td>16.80</td><td>4.30</td><td>4.29</td><td>4.30</td></tr><tr><td>14.40</td><td>4.33</td><td>4.32</td><td>4.33</td></tr><tr><td>12.00</td><td>4.35</td><td>4.35</td><td>4.35</td></tr><tr><td>9.60</td><td>4.37</td><td>4.36</td><td>4.37</td></tr><tr><td>7.20</td><td>4.40</td><td>4.39</td><td>4.38</td></tr><tr><td>4.80</td><td>4.42</td><td>4.40</td><td>4.37</td></tr><tr><td>2.40</td><td>4.40</td><td>4.35</td><td>4.26</td></tr><tr><td>0.00</td><td>4.15</td><td>4.08</td><td>3.98</td></tr></table>			Output Voltage [V]	Load Current [A]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	24.00	4.26	4.23	4.23	22.80	4.26	4.24	4.25	21.60	4.26	4.25	4.26	19.20	4.28	4.27	4.28	16.80	4.30	4.29	4.30	14.40	4.33	4.32	4.33	12.00	4.35	4.35	4.35	9.60	4.37	4.36	4.37	7.20	4.40	4.39	4.38	4.80	4.42	4.40	4.37	2.40	4.40	4.35	4.26	0.00	4.15	4.08	3.98
Output Voltage [V]	Load Current [A]																																																										
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																								
24.00	4.26	4.23	4.23																																																								
22.80	4.26	4.24	4.25																																																								
21.60	4.26	4.25	4.26																																																								
19.20	4.28	4.27	4.28																																																								
16.80	4.30	4.29	4.30																																																								
14.40	4.33	4.32	4.33																																																								
12.00	4.35	4.35	4.35																																																								
9.60	4.37	4.36	4.37																																																								
7.20	4.40	4.39	4.38																																																								
4.80	4.42	4.40	4.37																																																								
2.40	4.40	4.35	4.26																																																								
0.00	4.15	4.08	3.98																																																								
Note: Slanted line shows the range of the rated load current.																																																											
(注)斜線は定格負荷電流範囲を示す。																																																											

# COSEL

Model LDA75F-24


Item Overvoltage Protection  
過電圧保護

Object +24.0V3.2A

Testing Circuitry Figure A

## 1. Graph

—△— Input Volt. 85 V  
 □ Input Volt. 100 V  
 ○ Input Volt. 132 V

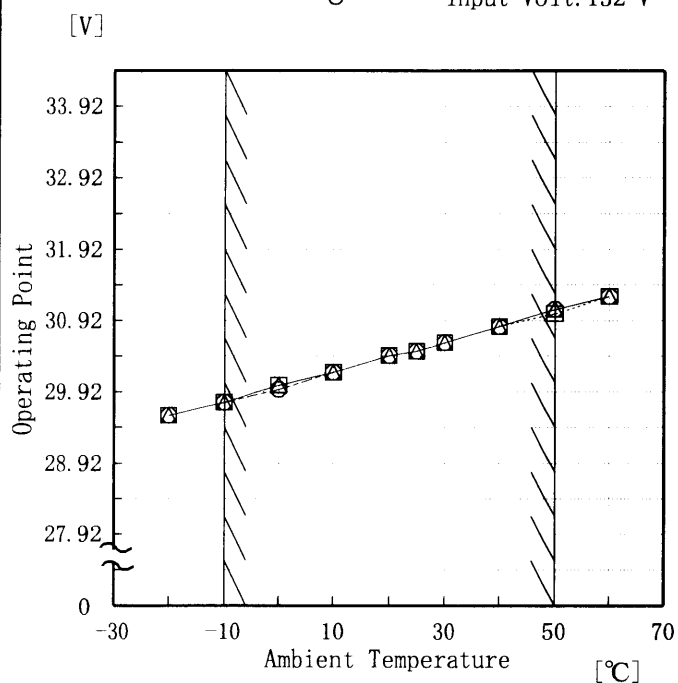

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

## 2. Values


Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
-20	29.59	29.59	29.59
-10	29.77	29.77	29.77
0	30.01	30.01	29.95
10	30.19	30.19	30.19
20	30.43	30.43	30.43
25	30.49	30.49	30.49
30	30.61	30.61	30.61
40	30.84	30.84	30.84
50	31.08	31.02	31.08
60	31.26	31.26	31.26
—	—	—	—

**COSEL**

Model LDA75F-24

Item Inrush Current 突入電流

Object

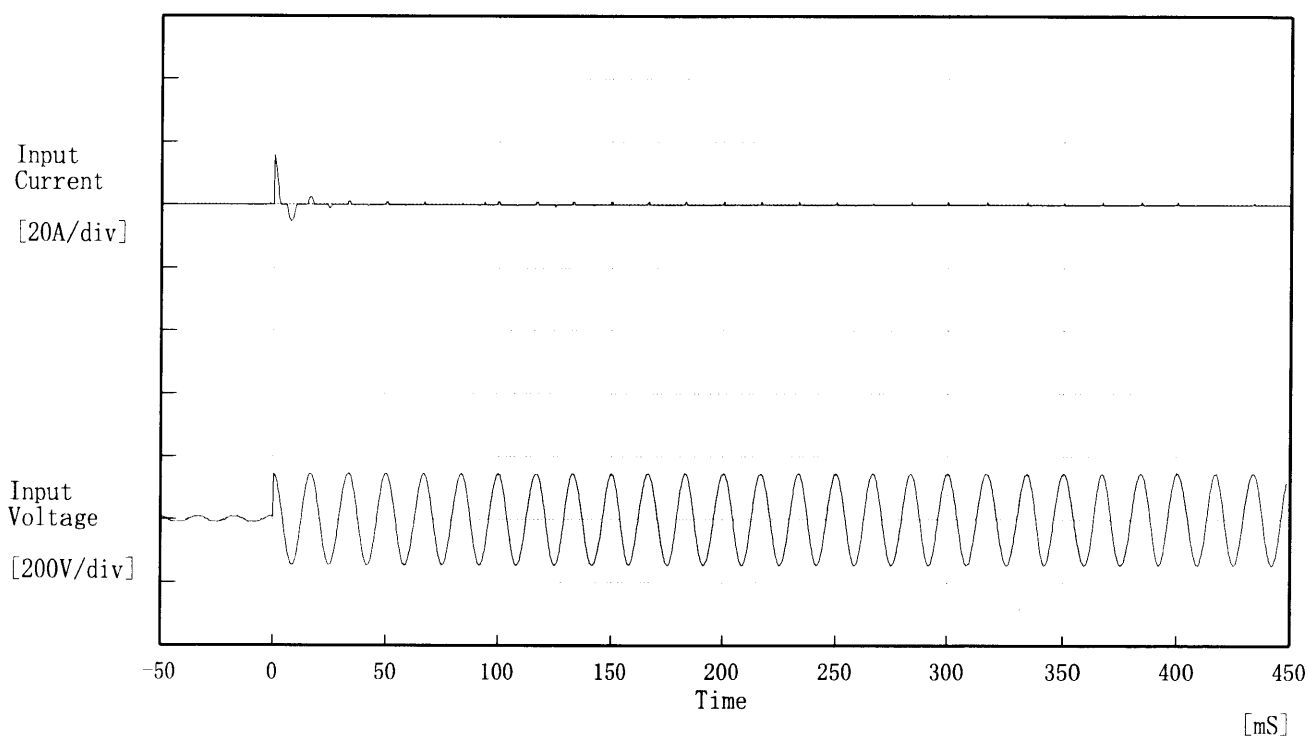Temperature 25°C  
Testing Circuitry Figure A

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 15.56 [A]

② 0.84 [A]

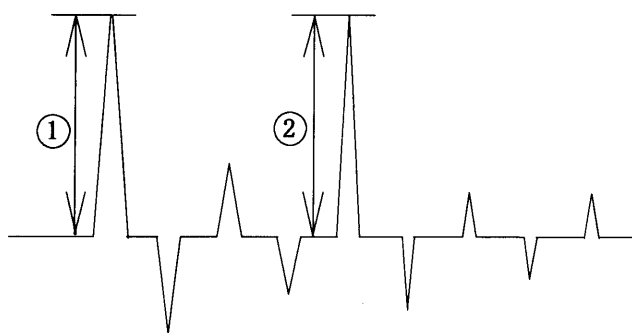

**COSEL**

Model	LDA75F-24	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+24.0V3.2A	



Input Volt. 100 V

Cycle 1000 mS

Load Current



Load 0% ↔

Load 100 %

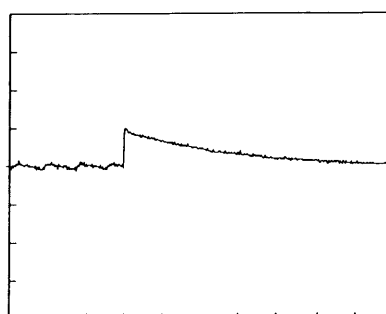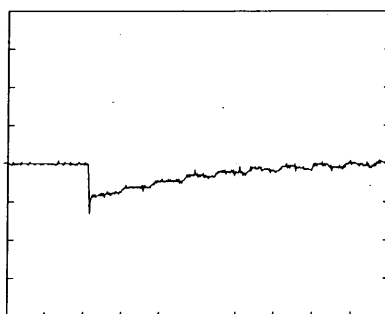

Load 0% ↔

Load 50 %

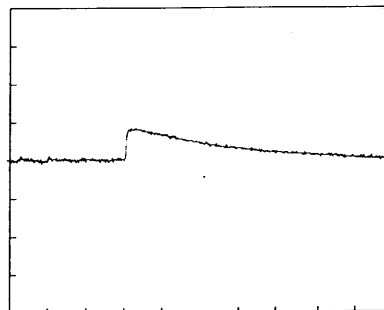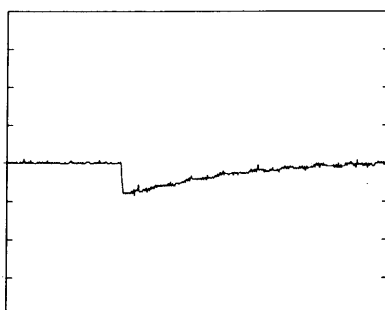

100 mV/div

10 mS/div




**COSEL**

Model	LDA75F-24	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+24.0V3.2A		

## 1. Graph


Input Volt. 85 V

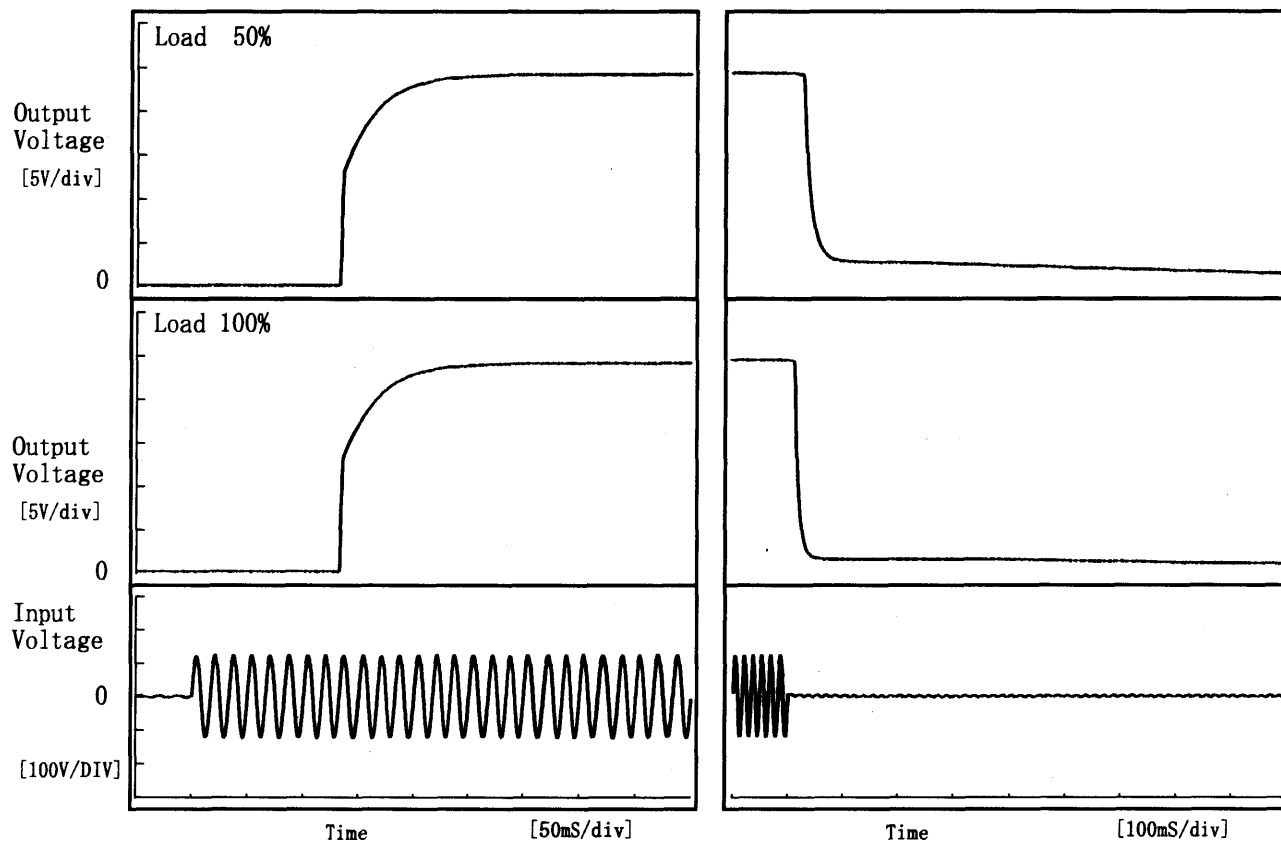

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	133.8	47.3	181.0	32.0	294.5
100 %	133.8	47.3	181.0	15.5	22.5

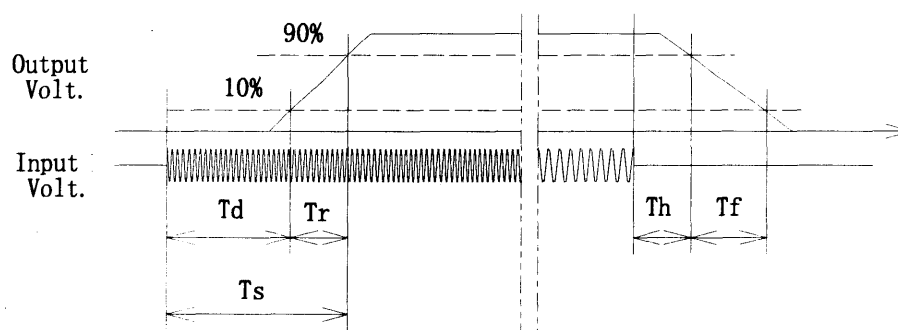

**COSEL**

Model		LDA75F-24	Testing Circuitry    Figure A																																																			
Item		Ambient Temperature Drift 周囲温度変動																																																				
Object		+24.0V3.2A																																																				
1. Graph		<div><div>△</div>Input Volt. 85V</div> <div><div>□</div>Input Volt. 100V</div> <div><div>○</div>Input Volt. 132V</div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load    100%</p>	2. Values																																																			
		<table><tr><th rowspan="2">Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 85[V]</th><th>Input Volt. 100[V]</th><th>Input Volt. 132[V]</th></tr><tr><td>-20</td><td>24.107</td><td>24.107</td><td>24.107</td></tr><tr><td>-10</td><td>24.108</td><td>24.108</td><td>24.108</td></tr><tr><td>0</td><td>24.107</td><td>24.107</td><td>24.107</td></tr><tr><td>10</td><td>24.107</td><td>24.107</td><td>24.107</td></tr><tr><td>20</td><td>24.108</td><td>24.108</td><td>24.108</td></tr><tr><td>25</td><td>24.109</td><td>24.109</td><td>24.109</td></tr><tr><td>30</td><td>24.109</td><td>24.109</td><td>24.108</td></tr><tr><td>40</td><td>24.102</td><td>24.102</td><td>24.102</td></tr><tr><td>50</td><td>24.092</td><td>24.091</td><td>24.091</td></tr><tr><td>60</td><td>24.079</td><td>24.079</td><td>24.079</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>		Temperature [°C]	Output Voltage [V]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	-20	24.107	24.107	24.107	-10	24.108	24.108	24.108	0	24.107	24.107	24.107	10	24.107	24.107	24.107	20	24.108	24.108	24.108	25	24.109	24.109	24.109	30	24.109	24.109	24.108	40	24.102	24.102	24.102	50	24.092	24.091	24.091	60	24.079	24.079	24.079	—	—	—	—
Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
-20	24.107	24.107	24.107																																																			
-10	24.108	24.108	24.108																																																			
0	24.107	24.107	24.107																																																			
10	24.107	24.107	24.107																																																			
20	24.108	24.108	24.108																																																			
25	24.109	24.109	24.109																																																			
30	24.109	24.109	24.108																																																			
40	24.102	24.102	24.102																																																			
50	24.092	24.091	24.091																																																			
60	24.079	24.079	24.079																																																			
—	—	—	—																																																			

**COSEL**

Model LDA75F-24		Testing Circuitry Figure A																																						
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧																																							
Object	+24.0V3.2A																																							
1. Graph <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">□ Load 50%</div> <div style="text-align: center;">△ Load 100%</div> </div> <p style="text-align: center;">Ambient Temperature [°C]</p>		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> </thead> <tbody> <tr><td>-20</td><td>56</td><td>61</td></tr> <tr><td>-10</td><td>55</td><td>61</td></tr> <tr><td>0</td><td>54</td><td>61</td></tr> <tr><td>10</td><td>53</td><td>60</td></tr> <tr><td>20</td><td>53</td><td>60</td></tr> <tr><td>25</td><td>53</td><td>60</td></tr> <tr><td>30</td><td>53</td><td>60</td></tr> <tr><td>40</td><td>53</td><td>60</td></tr> <tr><td>50</td><td>52</td><td>60</td></tr> <tr><td>60</td><td>52</td><td>60</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-20	56	61	-10	55	61	0	54	61	10	53	60	20	53	60	25	53	60	30	53	60	40	53	60	50	52	60	60	52	60	—	—	—
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-20	56	61																																						
-10	55	61																																						
0	54	61																																						
10	53	60																																						
20	53	60																																						
25	53	60																																						
30	53	60																																						
40	53	60																																						
50	52	60																																						
60	52	60																																						
—	—	—																																						
Note: Slanted line shows the range of the rated ambient temperature.  (注)斜線は定格周囲温度範囲を示す。																																								

# COSEL

Model		LDA75F-24	Testing Circuitry	Figure A																																							
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																									
Object		+24.0V3.2A																																									
1. Graph			2. Values																																								
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <div><p>[mV]</p><p>Ripple Voltage</p><p>Ambient Temperature</p><p>[°C]</p><p>Input Volt. 100 V</p><p>Note: Slanted line shows the range of the rated ambient temperature.</p><p>(注)斜線は定格周囲温度範囲を示す。</p></div>			<table><tr><th>Ambient Temp.</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>[°C]</th><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>-20</td><td>30</td><td>35</td></tr><tr><td>-10</td><td>20</td><td>30</td></tr><tr><td>0</td><td>20</td><td>25</td></tr><tr><td>10</td><td>15</td><td>25</td></tr><tr><td>20</td><td>15</td><td>20</td></tr><tr><td>25</td><td>15</td><td>20</td></tr><tr><td>30</td><td>15</td><td>20</td></tr><tr><td>40</td><td>10</td><td>15</td></tr><tr><td>50</td><td>10</td><td>10</td></tr><tr><td>60</td><td>10</td><td>10</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Ambient Temp.	Load 50%	Load 100%	[°C]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-20	30	35	-10	20	30	0	20	25	10	15	25	20	15	20	25	15	20	30	15	20	40	10	15	50	10	10	60	10	10	—	—	—
Ambient Temp.	Load 50%	Load 100%																																									
[°C]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																									
-20	30	35																																									
-10	20	30																																									
0	20	25																																									
10	15	25																																									
20	15	20																																									
25	15	20																																									
30	15	20																																									
40	10	15																																									
50	10	10																																									
60	10	10																																									
—	—	—																																									

**COSEL**


Model LDA75F-24

Item Time Lapse Drift 経時ドリフト

Object +24.0V3.2A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

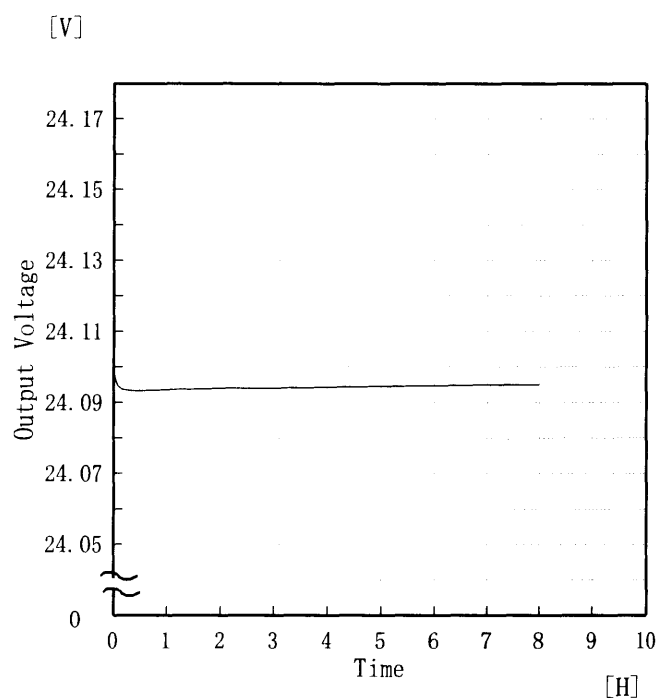

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	24.102
0.5	24.093
1.0	24.094
2.0	24.094
3.0	24.094
4.0	24.094
5.0	24.095
6.0	24.095
7.0	24.095
8.0	24.095

# COSEL

Model		LDA75F-24	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+24.0V3.2A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0~3.2 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0~3.2 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	85	0.0	24.116	±15	±0.1
Minimum Voltage	50	132	3.2	24.088		



**COSEL**

Model	LDA75F-24	Temperature	25℃
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

## 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	0.15	0.17	0.22
(B) IEC60950	0.14	0.16	0.20

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	—	—	—

## 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力両相について測定し、その大きい方を漏洩電流測定値とする。



# COSEL

Model		LDA75F-24	Temperature 25°C Testing Circuitry Figure C
Item		Line Noise Tolerance 入力雑音耐量	
Object		+24.0V3.2A	

## 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

## 2. Conditions

Input Voltage : 100 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

**COSEL**

Model	LDA75F-24	Temperature	25℃
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object			

## 1. Graph

## Remarks


Input Volt. 100 V (VCCI Class B)

120 V (FCC Class B)


Load 100 %

規格 1 : [VCCI] Class B(平均値)

規格 2 : [VCCI] Class B(QP)

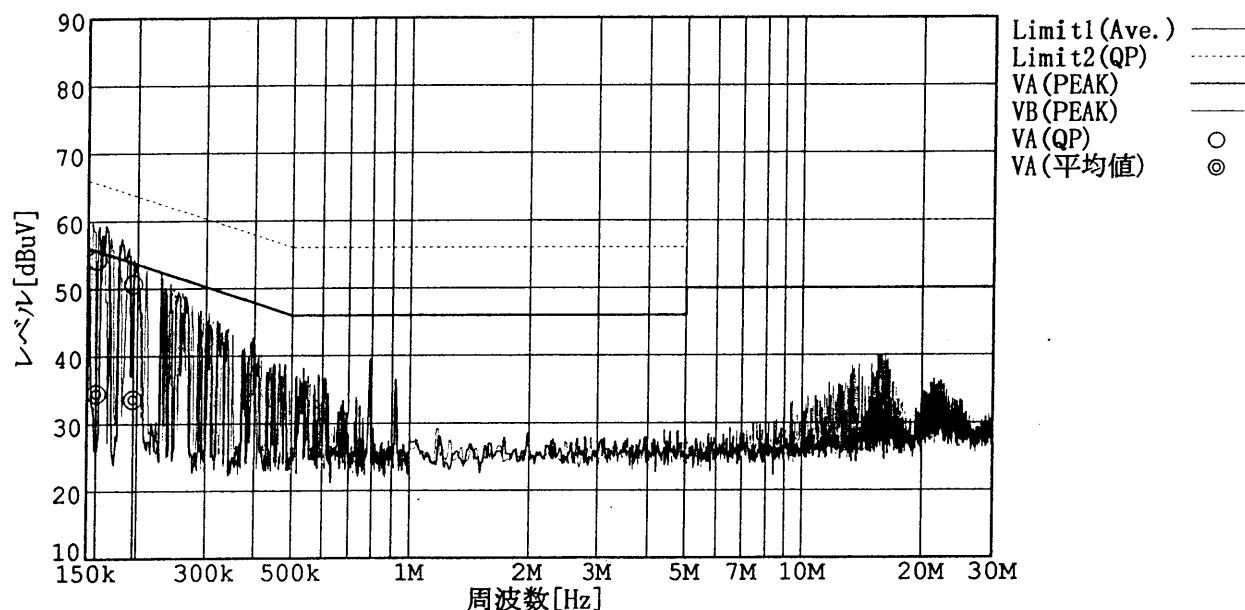

規格 1 : [FCC Part15] Class B

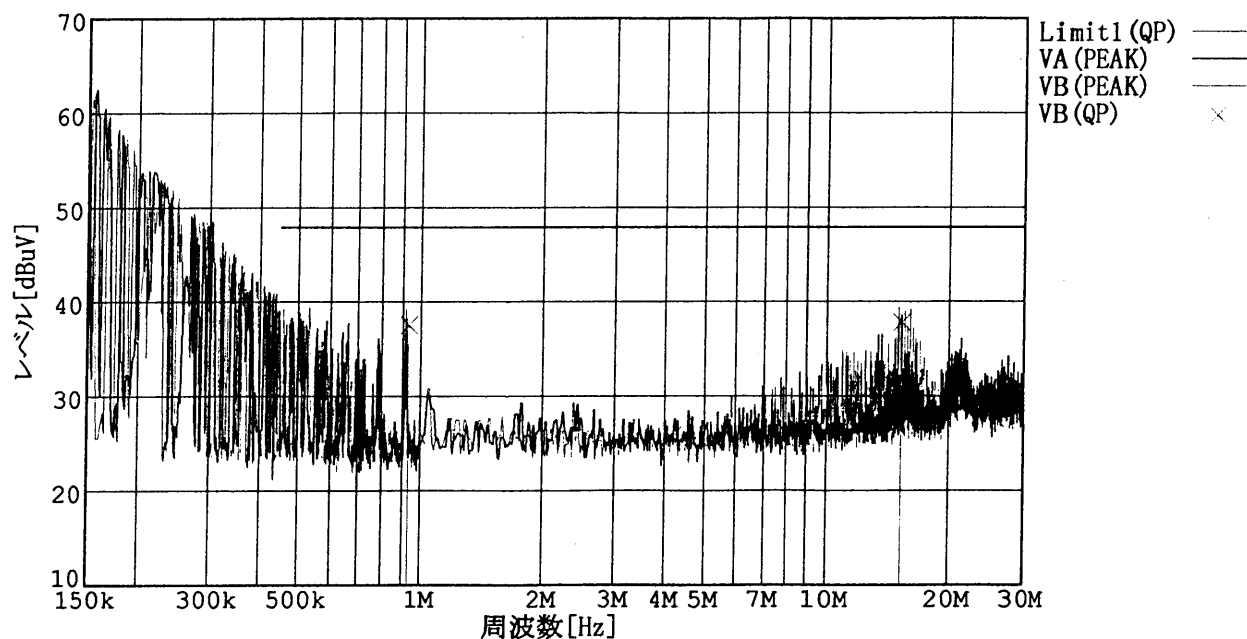

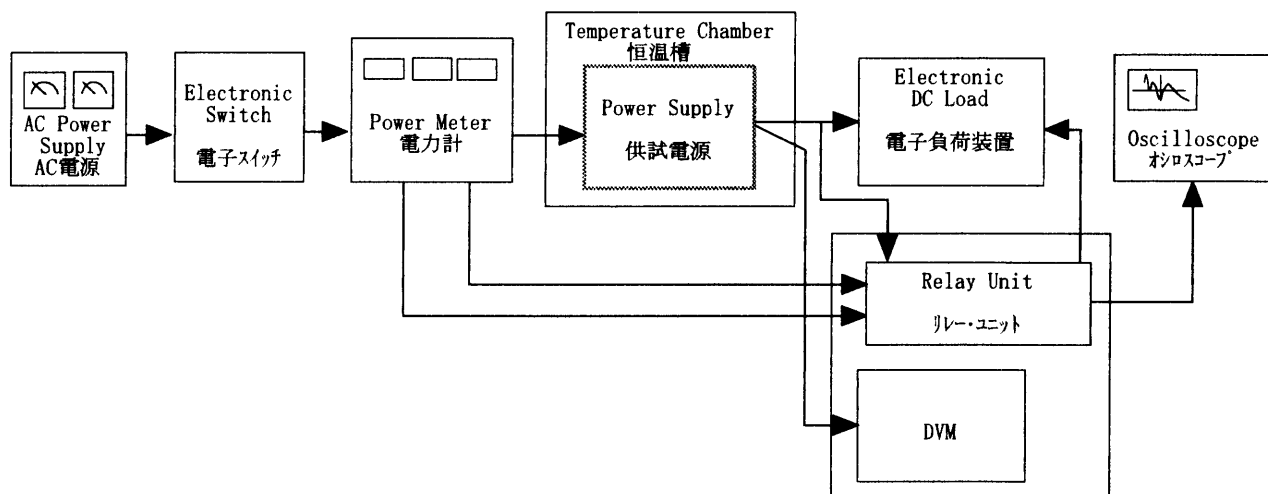


Figure A

Data Acquisition/Control Unit  
データ集録システム

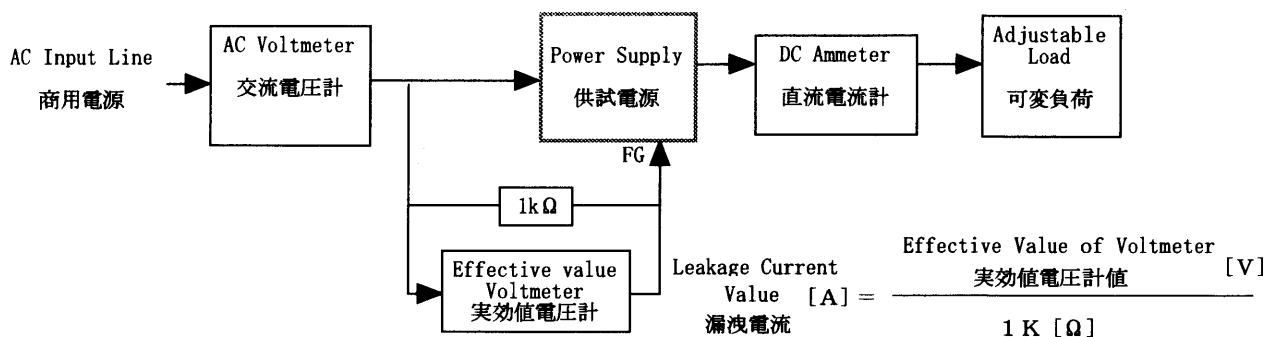


Figure B (DENTORI)

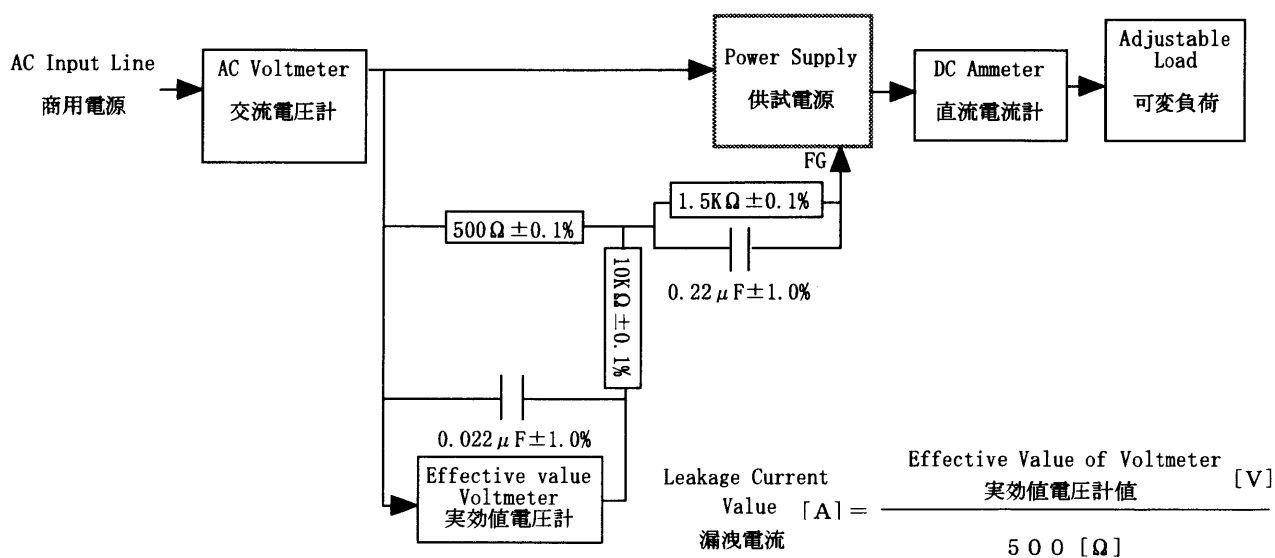


Figure B (IEC 60950)

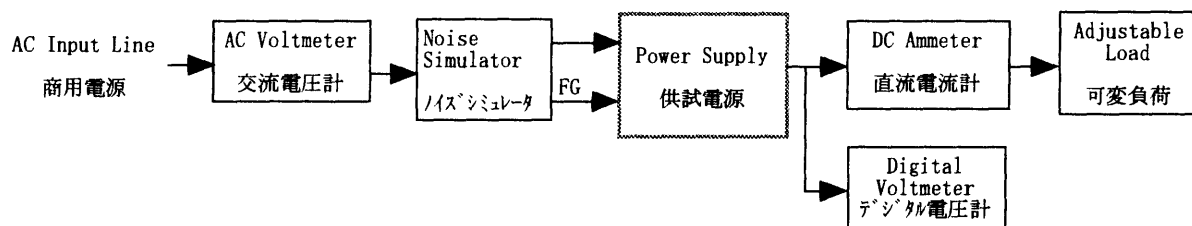


Figure C

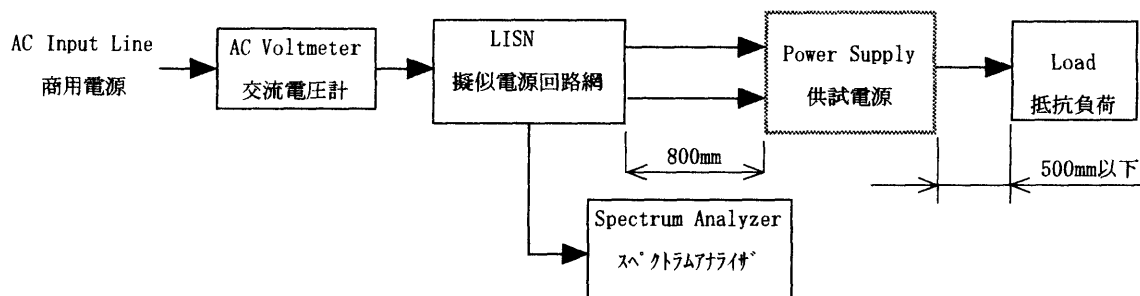


Figure D

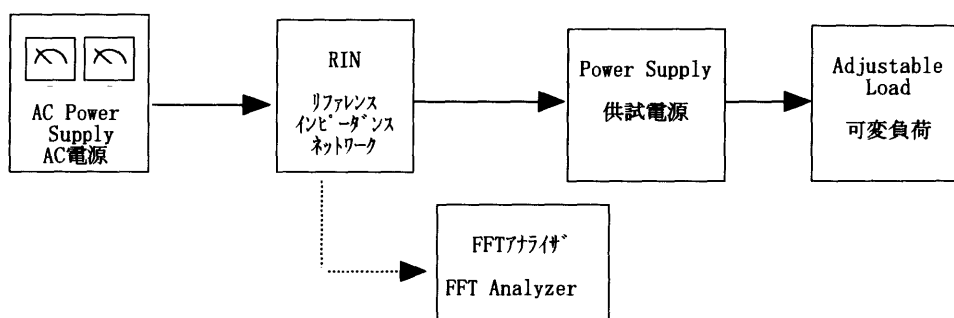


Figure E