

TEST DATA OF LHP150F-48-Y

Regulated DC Power Supply
April 5, 2021

Approved by : Junya Kaneda
Design Manager


Prepared by : Yasushi Fukumura
Design Engineer

COSEL CO.,LTD.


CONTENTS

1.Input Current (by Load Current)	1
2.Efficiency (by Load Current)	2
3.Power Factor (by Load Current)	3
4.Inrush Current	4
5.Leakage Current	5
6.Line Regulation	6
7.Load Regulation	7
8.Ripple-Noise	7
9.Dynamic Load Response	8
10.Rise and Fall Time	9
11.Hold-Up Time	10
12.Instantaneous Interruption Compensation	11
13.Overcurrent Protection	12
14.Ambient Temperature Drift	13
15.Minimum Input Voltage for Regulated Output Voltage	13
16.Overvoltage Protection	13
17.Figure of Testing Circuitry	14

(Final Page 15)

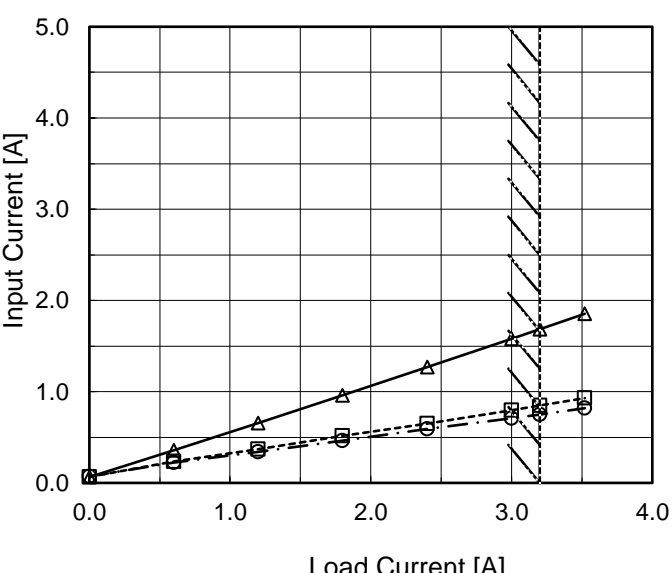Model		LHP150F-48-Y		Temperature 25°C																																																				
Item		Input Current (by Load Current)		Testing Circuitry Figure A																																																				
Object		_____																																																						
1.Graph		<div><div><div>—△—</div><div>Input Volt.</div><div>100V</div></div><div><div>---□---</div><div>Input Volt.</div><div>200V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>230V</div></div></div> 		2.Values																																																				
		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>0.065</td><td>0.066</td><td>0.072</td></tr><tr><td>0.60</td><td>0.359</td><td>0.234</td><td>0.224</td></tr><tr><td>1.20</td><td>0.655</td><td>0.371</td><td>0.343</td></tr><tr><td>1.80</td><td>0.962</td><td>0.513</td><td>0.465</td></tr><tr><td>2.40</td><td>1.269</td><td>0.652</td><td>0.589</td></tr><tr><td>3.00</td><td>1.580</td><td>0.799</td><td>0.708</td></tr><tr><td>3.20</td><td>1.686</td><td>0.849</td><td>0.751</td></tr><tr><td>3.52</td><td>1.854</td><td>0.929</td><td>0.819</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Input Current [A]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	0.065	0.066	0.072	0.60	0.359	0.234	0.224	1.20	0.655	0.371	0.343	1.80	0.962	0.513	0.465	2.40	1.269	0.652	0.589	3.00	1.580	0.799	0.708	3.20	1.686	0.849	0.751	3.52	1.854	0.929	0.819	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	0.065	0.066	0.072																																																					
0.60	0.359	0.234	0.224																																																					
1.20	0.655	0.371	0.343																																																					
1.80	0.962	0.513	0.465																																																					
2.40	1.269	0.652	0.589																																																					
3.00	1.580	0.799	0.708																																																					
3.20	1.686	0.849	0.751																																																					
3.52	1.854	0.929	0.819																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								



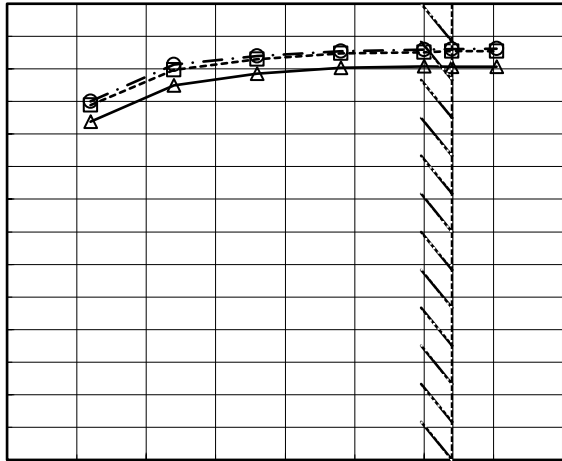


Model		LHP150F-48-Y		Temperature 25°C																																																				
Item		Efficiency (by Load Current)		Testing Circuitry Figure A																																																				
Object																																																								
1.Graph		<div><div><div>—△—</div><div>---□---</div><div>-·-○-·-</div></div><div><div>Input Volt. 100V</div><div>Input Volt. 200V</div><div>Input Volt. 230V</div></div></div> <div><div><div>Efficiency [%]</div><div>100</div><div>92</div><div>84</div><div>76</div><div>68</div><div>60</div><div>52</div><div>44</div></div><div><div>0.0</div><div>1.0</div><div>2.0</div><div>3.0</div><div>4.0</div></div><div><div>Load Current [A]</div><div></div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div></div>		2.Values																																																				
		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.60</td><td>85.5</td><td>87.6</td><td>88.0</td></tr><tr><td>1.20</td><td>90.0</td><td>91.9</td><td>92.5</td></tr><tr><td>1.80</td><td>91.4</td><td>93.2</td><td>93.6</td></tr><tr><td>2.40</td><td>92.2</td><td>93.9</td><td>94.1</td></tr><tr><td>3.00</td><td>92.3</td><td>94.1</td><td>94.4</td></tr><tr><td>3.20</td><td>92.3</td><td>94.2</td><td>94.4</td></tr><tr><td>3.52</td><td>92.3</td><td>94.2</td><td>94.5</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.60	85.5	87.6	88.0	1.20	90.0	91.9	92.5	1.80	91.4	93.2	93.6	2.40	92.2	93.9	94.1	3.00	92.3	94.1	94.4	3.20	92.3	94.2	94.4	3.52	92.3	94.2	94.5	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	-	-	-																																																					
0.60	85.5	87.6	88.0																																																					
1.20	90.0	91.9	92.5																																																					
1.80	91.4	93.2	93.6																																																					
2.40	92.2	93.9	94.1																																																					
3.00	92.3	94.1	94.4																																																					
3.20	92.3	94.2	94.4																																																					
3.52	92.3	94.2	94.5																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					

Model		LHP150F-48-Y		Temperature 25°C	
Item		Power Factor (by Load Current)		Testing Circuitry Figure A	
Object					
1.Graph					
		<div>—△— Input Volt. 100V</div> <div>---□--- Input Volt. 200V</div> <div>-·-○-·- Input Volt. 230V</div>			
Power Factor					
Load Current [A]					
Note: Slanted line shows the range of the rated load current.					
2.Values					
Load Current [A]		Power Factor			
		Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	
0.00		0.406	0.120	0.129	
0.60		0.947	0.710	0.641	
1.20		0.986	0.853	0.796	
1.80		0.993	0.912	0.873	
2.40		0.995	0.950	0.912	
3.00		0.997	0.966	0.945	
3.20		0.998	0.969	0.950	
3.52		0.997	0.974	0.958	
--		-	-	-	
--		-	-	-	
--		-	-	-	

COSEL

Model	LHP150F-48-Y	Temperature 25°C Testing Circuitry Figure A	
Item	Inrush Current		
Object			

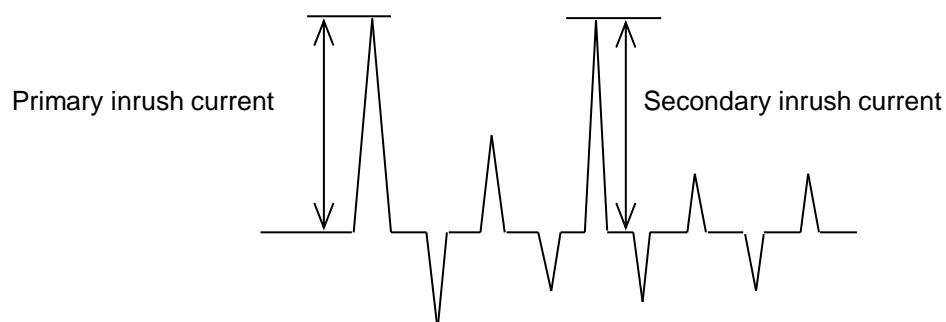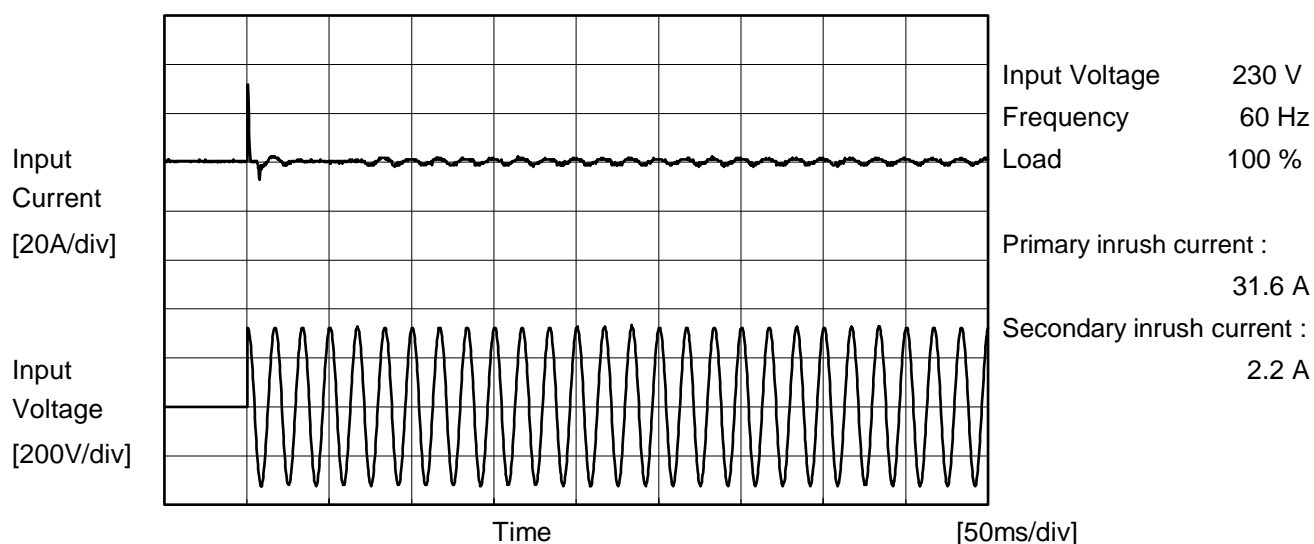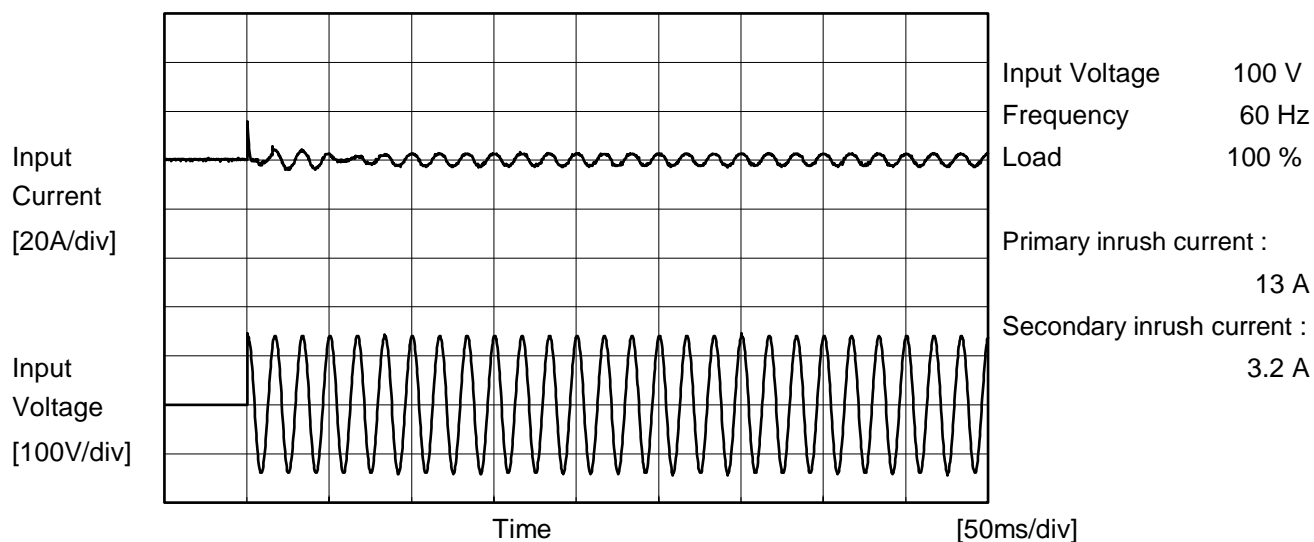



		Temperature 25°C Testing Circuitry Figure C
Model	LHP150F-48-Y	
Item	Leakage Current	
Object	_____	

1.Results

Standards	Testing Circuitry	Measuring Method	Input Volt.			Note
			100 [V]	230 [V]	240 [V]	
DEN-AN	Figure C-1	Both phases	0.15	0.36	0.37	Operation
		One of phases	0.27	0.64	0.70	Stand by
IEC62368-1	Figure C-2	Both phases	0.13	0.34	0.35	Operation
		One of phases	0.25	0.64	0.67	Stand by
	Figure C-3	Both phases	0.13	0.33	0.34	Operation
		One of phases	0.25	0.62	0.65	Stand by

The value for "One of phases" is the reference value only.

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

Model		LHP150F-48-Y	
Item		Line Regulation	
Object		+48V3.2A	
1.Graph		2.Values	


<



Model		LHP150F-48-Y		Temperature 25°C																																																				
Item		Load Regulation		Testing Circuitry Figure A																																																				
Object		+48V3.2A																																																						
1.Graph		<div><div><div>—△—</div><div>Input Volt. 100V</div></div><div><div>---□---</div><div>Input Volt. 200V</div></div><div><div>---○---</div><div>Input Volt. 230V</div></div></div> <div><div><div>Output Voltage [V]</div><div>48.6</div><div>48.5</div><div>48.4</div><div>48.3</div><div>48.2</div><div>48.1</div><div>48.0</div><div>47.9</div><div>47.8</div></div><div><div>0.0</div><div>1.0</div><div>2.0</div><div>3.0</div><div>4.0</div></div><div><div>Load Current [A]</div></div></div>		2.Values																																																				
				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>48.475</td><td>48.473</td><td>48.480</td></tr><tr><td>0.60</td><td>48.472</td><td>48.471</td><td>48.477</td></tr><tr><td>1.20</td><td>48.472</td><td>48.470</td><td>48.475</td></tr><tr><td>1.80</td><td>48.470</td><td>48.469</td><td>48.473</td></tr><tr><td>2.40</td><td>48.468</td><td>48.468</td><td>48.471</td></tr><tr><td>3.00</td><td>48.467</td><td>48.467</td><td>48.469</td></tr><tr><td>3.20</td><td>48.466</td><td>48.466</td><td>48.469</td></tr><tr><td>3.52</td><td>48.466</td><td>48.466</td><td>48.467</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr><tr><td>--</td><td>--</td><td>--</td><td>--</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	48.475	48.473	48.480	0.60	48.472	48.471	48.477	1.20	48.472	48.470	48.475	1.80	48.470	48.469	48.473	2.40	48.468	48.468	48.471	3.00	48.467	48.467	48.469	3.20	48.466	48.466	48.469	3.52	48.466	48.466	48.467	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	48.475	48.473	48.480																																																					
0.60	48.472	48.471	48.477																																																					
1.20	48.472	48.470	48.475																																																					
1.80	48.470	48.469	48.473																																																					
2.40	48.468	48.468	48.471																																																					
3.00	48.467	48.467	48.469																																																					
3.20	48.466	48.466	48.469																																																					
3.52	48.466	48.466	48.467																																																					
--	--	--	--																																																					
--	--	--	--																																																					
--	--	--	--																																																					
Note: Slanted line shows the range of the rated load current.																																																								
Item		Ripple-Noise		Temperature 25°C																																																				
Object		+48V3.2A		Testing Circuitry Figure B																																																				
1.Graph		<div><div><div>Input Voltage 230V</div><div>Load 100%</div></div><div><div><div>50[mV/div]</div></div><div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></</div></div></div></div></div>																																																						




Model	LHP150F-48-Y		
Item	Dynamic Load Response	Temperature	25°C
Object	+48V3.2A	Testing Circuitry	Figure A

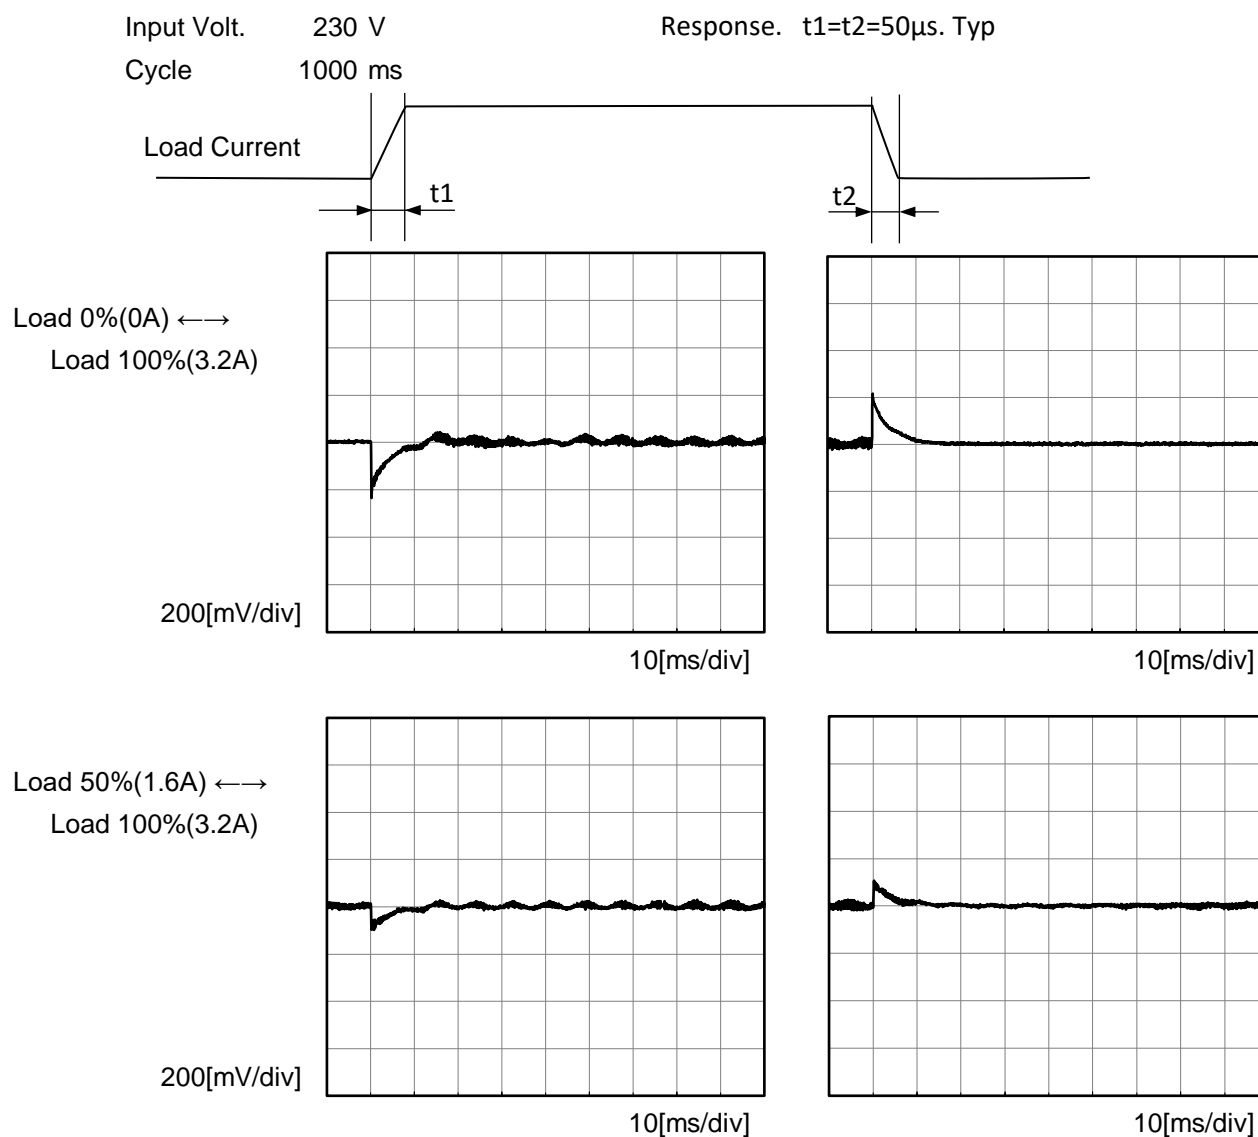


Model	LHP150F-48-Y	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+48V3.2A		

1.Graph

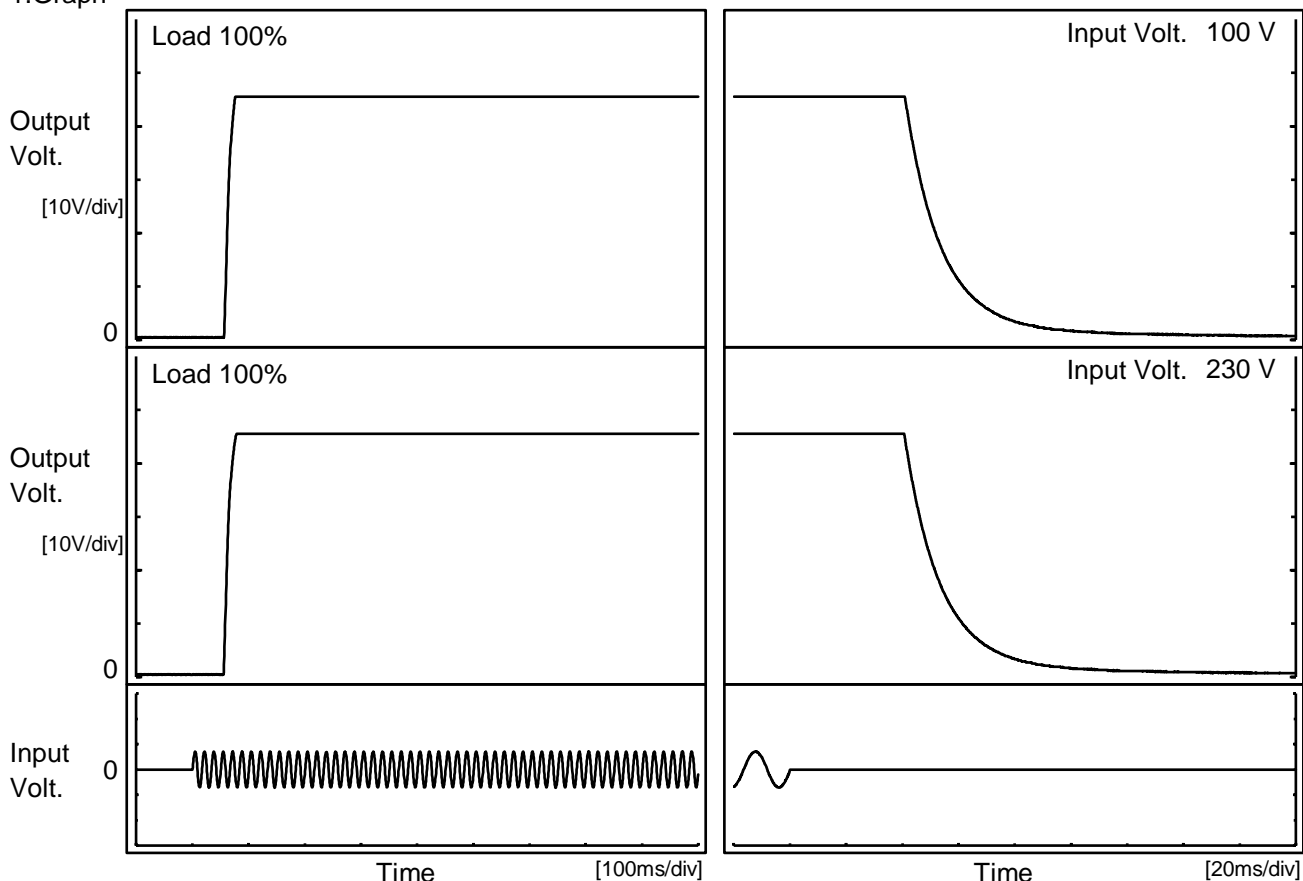


2.Values

Input Volt.	Time	Td	Tr	Ts	Th	Tf
100 V		58.5	16.0	74.5	41.4	30.8
230 V		57.5	18.0	75.5	41.2	30.7

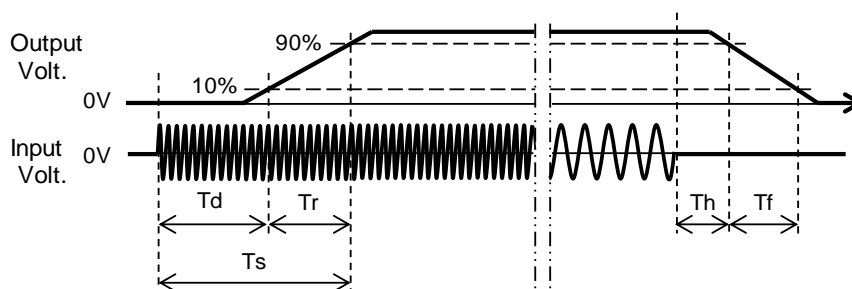

Temperature 25°C
Testing Circuitry Figure A

2.Values

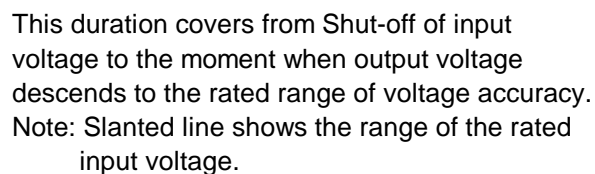

- 10 -

Model		LHP150F-48-Y		Temperature 25°C																																																				
Item		Instantaneous Interruption Compensation		Testing Circuitry Figure A																																																				
Object		+48V3.2A																																																						
1.Graph		<div><div><div>—△—</div><div>Input Volt. 100V</div></div><div><div>---□---</div><div>Input Volt. 200V</div></div><div><div>-·-○-·-</div><div>Input Volt. 230V</div></div></div> <div>Instantaneous Compensation Time [ms]</div> <div>Load Current [A]</div>		2.Values																																																				
		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Time [ms]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.60</td><td>174</td><td>197</td><td>197</td></tr><tr><td>1.20</td><td>89</td><td>105</td><td>105</td></tr><tr><td>1.80</td><td>61</td><td>71</td><td>71</td></tr><tr><td>2.40</td><td>44</td><td>54</td><td>54</td></tr><tr><td>3.00</td><td>29</td><td>39</td><td>39</td></tr><tr><td>3.20</td><td>28</td><td>38</td><td>39</td></tr><tr><td>3.52</td><td>28</td><td>37</td><td>37</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>				Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.60	174	197	197	1.20	89	105	105	1.80	61	71	71	2.40	44	54	54	3.00	29	39	39	3.20	28	38	39	3.52	28	37	37	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Time [ms]																																																							
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																					
0.00	-	-	-																																																					
0.60	174	197	197																																																					
1.20	89	105	105																																																					
1.80	61	71	71																																																					
2.40	44	54	54																																																					
3.00	29	39	39																																																					
3.20	28	38	39																																																					
3.52	28	37	37																																																					
--	-	-	-																																																					
--	-	-	-																																																					
--	-	-	-																																																					
Note: Slanted line shows the range of the rated load current.																																																								

Model		LHP150F-48-Y		Temperature Testing Circuitry	25°C Figure A																																												
Item		Overcurrent Protection																																															
Object		+48V3.2A																																															
1.Graph				2.Values																																													
<div><div><div></div><div>Input Volt. 100V</div></div><div><div></div><div>Input Volt. 230V</div></div></div> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Overcurrent protection is Hiccup mode.</p>				<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="2">Load Current [A]</th></tr><tr><th>Input Volt. 100[V]</th><th>Input Volt. 230[V]</th></tr><tr><td>48</td><td>8.48</td><td>8.48</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr><tr><td>-</td><td>-</td><td>-</td></tr></table>		Output Voltage [V]	Load Current [A]		Input Volt. 100[V]	Input Volt. 230[V]	48	8.48	8.48	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Output Voltage [V]	Load Current [A]																																																
	Input Volt. 100[V]	Input Volt. 230[V]																																															
48	8.48	8.48																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															
-	-	-																																															

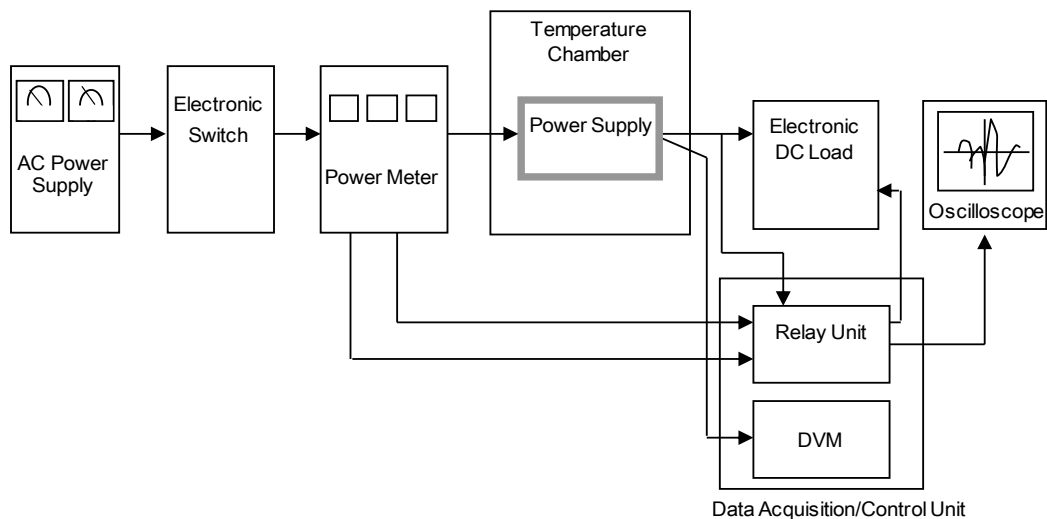


Figure A

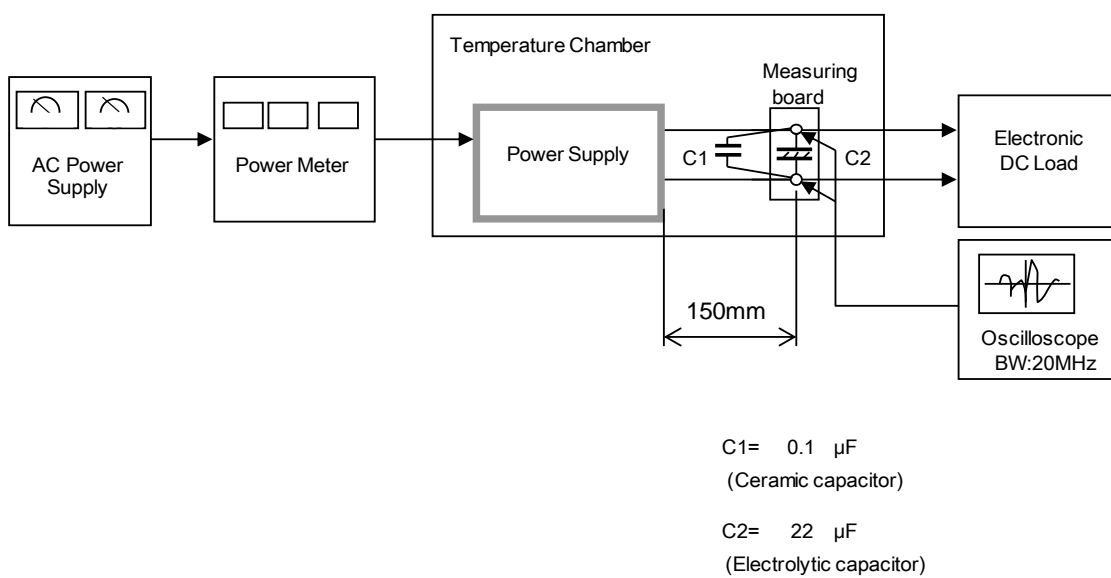


Figure B

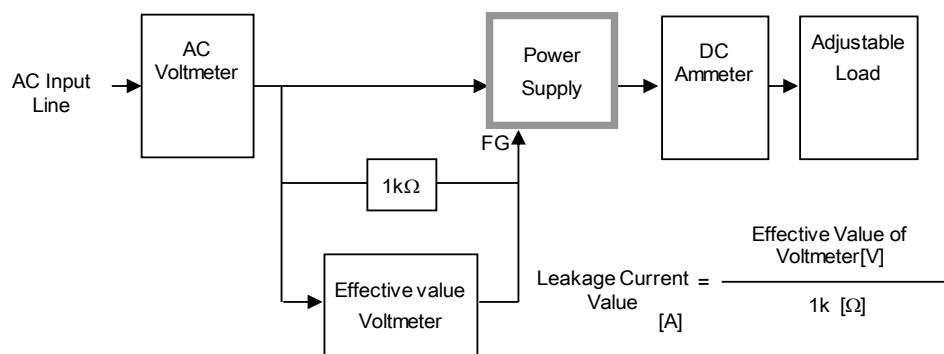


Figure C-1 (DEN-AN)

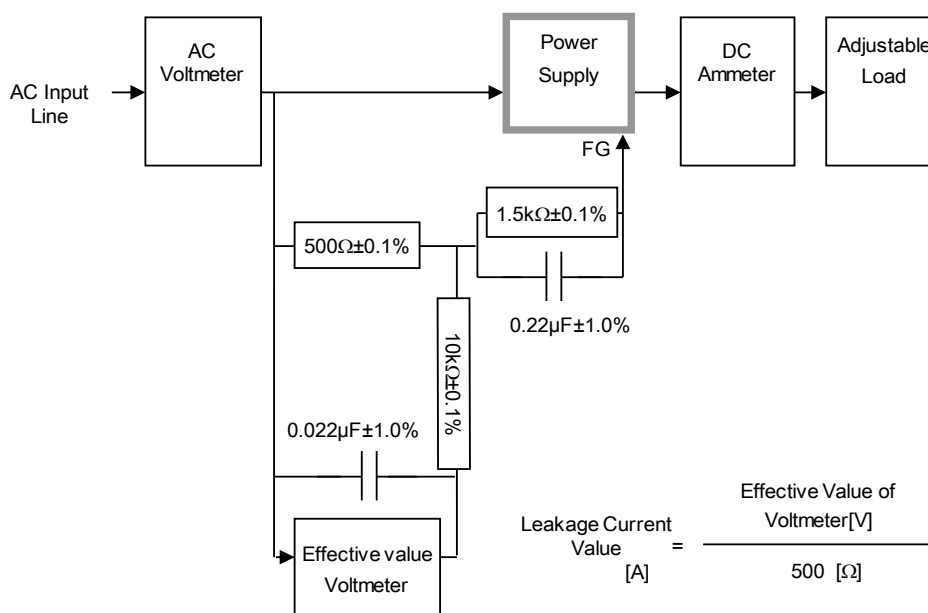


Figure C-2 (IEC62368-1 refer to IEC60990 Fig.4)

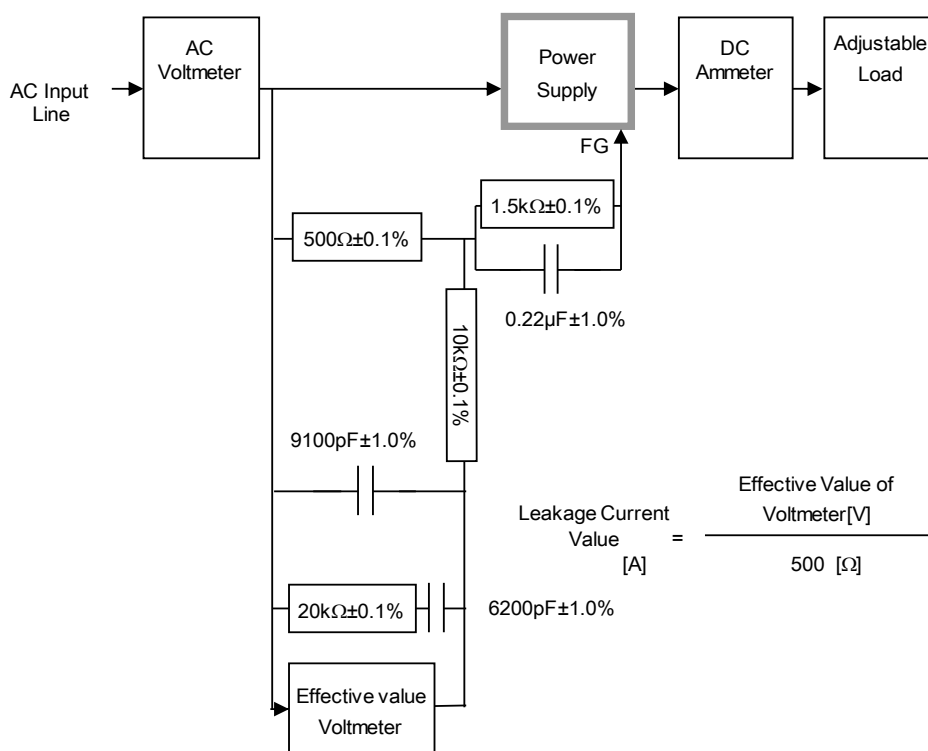


Figure C-3 (IEC62368-1 refer to IEC60990 Fig.5)