

# TEST DATA OF TEPS45F24

Regulated DC Power Supply  
October.3. 2023

Approved by : \_\_\_\_\_ Satoshi Uetani  
\_\_\_\_\_  
Design Manager

Prepared by : \_\_\_\_\_ Riku Nishimura  
\_\_\_\_\_  
Design Engineer

**COSEL CO.,LTD.**



## CONTENTS

1.Input Current (by Load Current) . . . . .	1
2.Efficiency (by Load Current) . . . . .	2
3.Power Factor (by Load Current) . . . . .	3
4.Inrush Current . . . . .	4
5.Leakage Current . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Ripple-Noise . . . . .	7
9.Dynamic Load Response . . . . .	8
10.Rise and Fall Time . . . . .	9
11.Hold-Up Time . . . . .	10
12.Instantaneous Interruption Compensation . . . . .	11
13.Overcurrent Protection . . . . .	12
14.Ambient Temperature Drift . . . . .	13
15.Minimum Input Voltage for Regulated Output Voltage . . . . .	13
16.Overvoltage Protection . . . . .	13
17.Figure of Testing Circuitry . . . . .	14


(Final Page 15)

**COSEL**

Model	TEPS45F24
Item	Input Current (by Load Current)
Object	_____

## 1.Graph

—△— Input Volt. 100V  
 - - -□- - Input Volt. 200V  
 - - ○ - - Input Volt. 230V

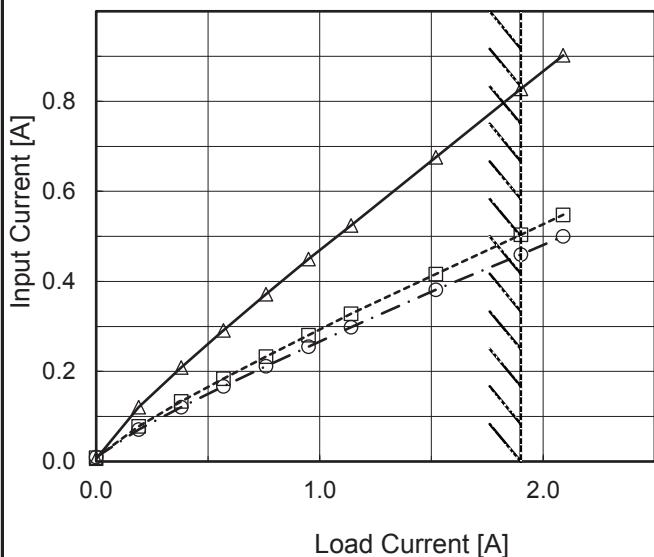

Note: Slanted line shows the range of the rated load current.

 Temperature 25°C  
 Testing Circuitry Figure A

## 2.Values


Load Current [A]	Input Current [A]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	0.006	0.009	0.010
0.19	0.120	0.078	0.071
0.38	0.209	0.133	0.121
0.57	0.291	0.184	0.167
0.76	0.371	0.233	0.212
0.95	0.450	0.281	0.255
1.14	0.524	0.328	0.298
1.52	0.676	0.416	0.382
1.90	0.827	0.504	0.460
2.09	0.902	0.548	0.500
--	-	-	-

**COSEL**

Model	TEPS45F24	Temperature	25°C																																																			
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																			
Object	<hr/>																																																					
1.Graph	<p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Legend:</p> <ul style="list-style-type: none"> <li>Input Volt. 100V</li> <li>Input Volt. 200V</li> <li>Input Volt. 230V</li> </ul>																																																					
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>0.19</td><td>89.0</td><td>86.8</td><td>85.3</td></tr> <tr> <td>0.38</td><td>90.3</td><td>89.7</td><td>89.0</td></tr> <tr> <td>0.57</td><td>90.7</td><td>90.8</td><td>90.1</td></tr> <tr> <td>0.76</td><td>90.8</td><td>91.2</td><td>90.8</td></tr> <tr> <td>0.95</td><td>90.9</td><td>91.5</td><td>91.1</td></tr> <tr> <td>1.14</td><td>91.7</td><td>91.7</td><td>91.3</td></tr> <tr> <td>1.52</td><td>91.5</td><td>92.6</td><td>91.5</td></tr> <tr> <td>1.90</td><td>91.4</td><td>92.8</td><td>92.5</td></tr> <tr> <td>2.09</td><td>91.6</td><td>92.9</td><td>92.7</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.19	89.0	86.8	85.3	0.38	90.3	89.7	89.0	0.57	90.7	90.8	90.1	0.76	90.8	91.2	90.8	0.95	90.9	91.5	91.1	1.14	91.7	91.7	91.3	1.52	91.5	92.6	91.5	1.90	91.4	92.8	92.5	2.09	91.6	92.9	92.7	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	-	-	-																																																			
0.19	89.0	86.8	85.3																																																			
0.38	90.3	89.7	89.0																																																			
0.57	90.7	90.8	90.1																																																			
0.76	90.8	91.2	90.8																																																			
0.95	90.9	91.5	91.1																																																			
1.14	91.7	91.7	91.3																																																			
1.52	91.5	92.6	91.5																																																			
1.90	91.4	92.8	92.5																																																			
2.09	91.6	92.9	92.7																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

**COSEL**

Model	TEPS45F24
Item	Power Factor (by Load Current)
Object	_____

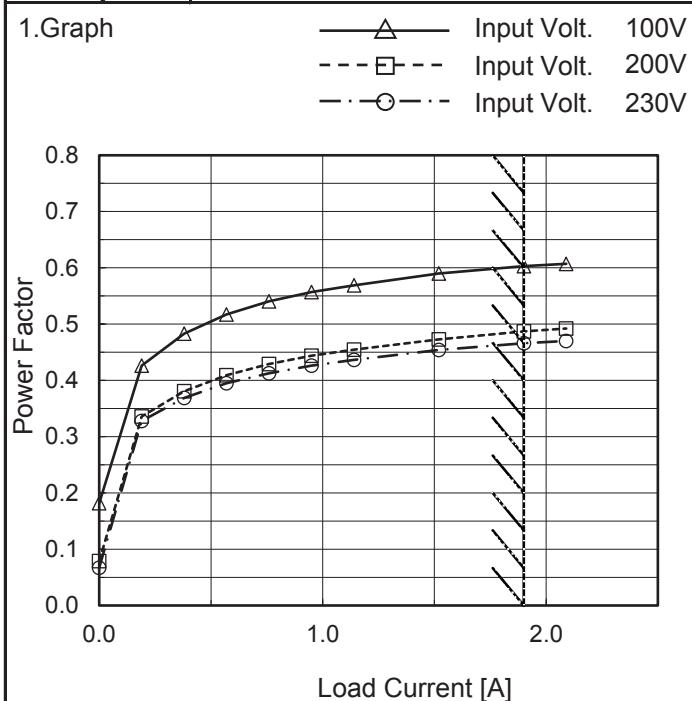
 Temperature 25°C  
 Testing Circuitry Figure A




## 2.Values

Load Current [A]	Power Factor		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	0.182	0.079	0.067
0.19	0.426	0.336	0.328
0.38	0.483	0.381	0.369
0.57	0.517	0.409	0.395
0.76	0.541	0.429	0.412
0.95	0.557	0.444	0.426
1.14	0.569	0.455	0.437
1.52	0.590	0.473	0.454
1.90	0.603	0.487	0.466
2.09	0.607	0.492	0.470
--	-	-	-

Note: Slanted line shows the range of the rated load current.

**COSEL**

Model	TEPS45F24	Temperature	25°C
Item	Inrush Current	Testing Circuitry	Figure A
Object	_____		

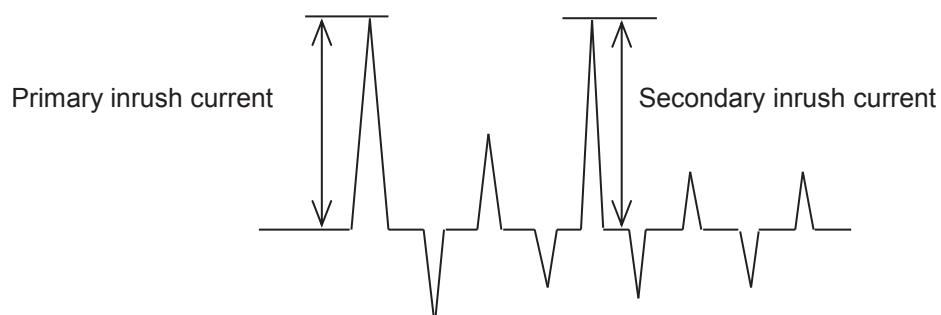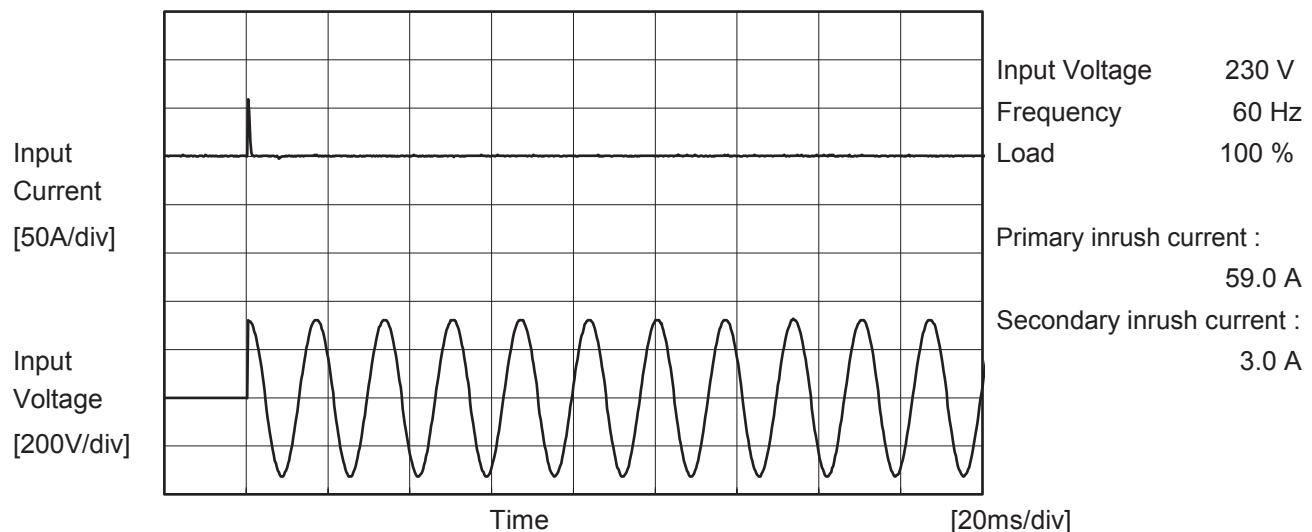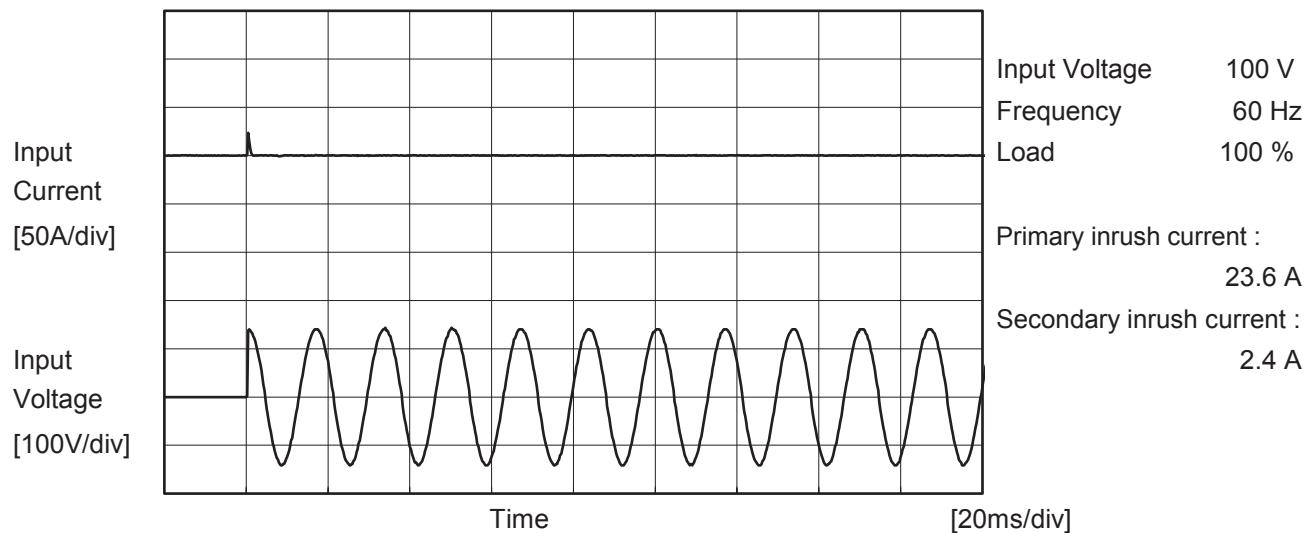



Model	TEPS45F24	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure C
Object	_____		

## 1. Results

[mA]

Standards	Testing Circuitry	Measuring Method	Input Volt.			Note
			100 [V]	230 [V]	264 [V]	
DEN-AN	Figure C-1	Both phases	0.04	0.08	0.09	Operation
		One of phases	0.05	0.12	0.14	Stand by
IEC62368-1	Figure C-2	Both phases	0.03	0.08	0.09	Operation
		One of phases	0.05	0.11	0.13	Stand by
	Figure C-3	Both phases	0.03	0.07	0.08	Operation
		One of phases	0.05	0.11	0.13	Stand by

The value for "One of phases" is the reference value only.

## 2. Condition


Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

**COSEL**

Model	TEPS45F24
Item	Line Regulation
Object	+24V1.9A

 Temperature 25°C  
 Testing Circuitry Figure A

## 1.Graph


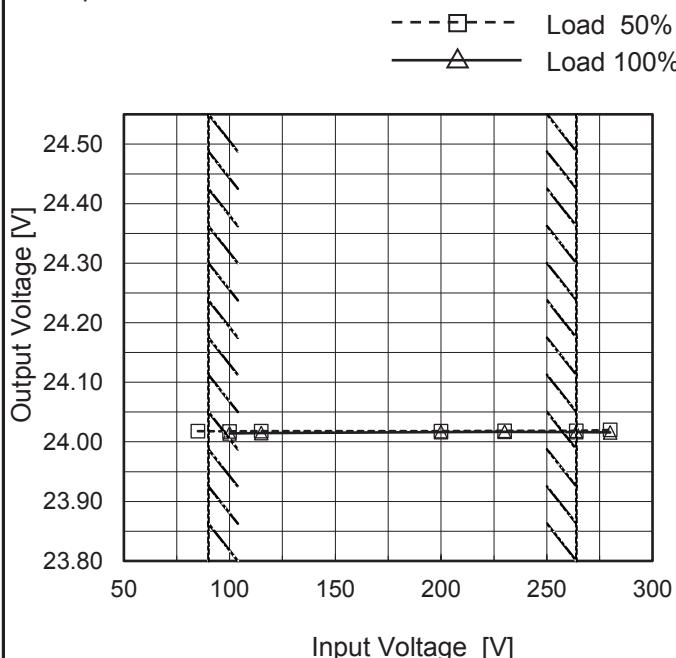


## 2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
85	24.018	-
100	24.018	24.014
115	24.018	24.015
200	24.018	24.016
230	24.019	24.017
264	24.019	24.016
280	24.020	24.016
--	-	-
--	-	-

Note: Slanted line shows the range of the rated input voltage.

**COSEL**

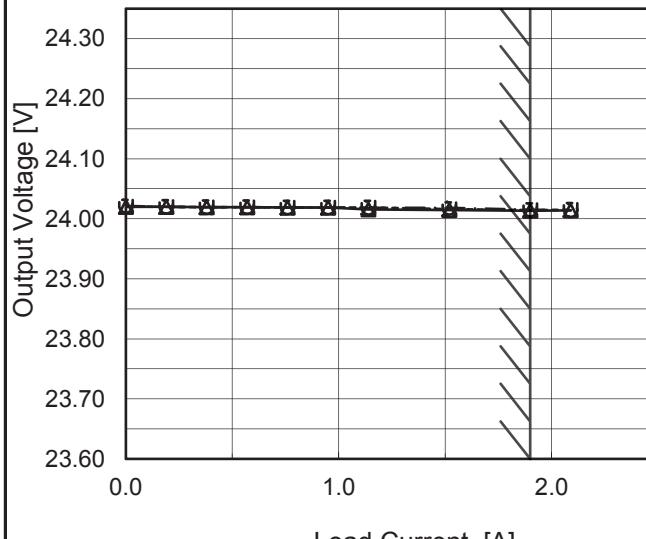
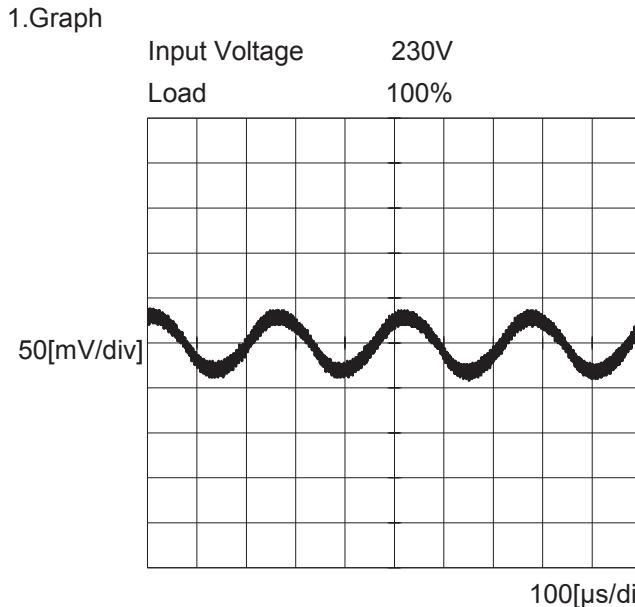
Model	TEPS45F24	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+24V1.9A	2. Values																																																				
1. Graph	<p>—△— Input Volt. 100V        - - -□--- Input Volt. 200V        - - -○--- Input Volt. 230V</p> 																																																					
	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>24.020</td> <td>24.021</td> <td>24.021</td> </tr> <tr> <td>0.19</td> <td>24.020</td> <td>24.020</td> <td>24.020</td> </tr> <tr> <td>0.38</td> <td>24.019</td> <td>24.019</td> <td>24.019</td> </tr> <tr> <td>0.57</td> <td>24.019</td> <td>24.019</td> <td>24.019</td> </tr> <tr> <td>0.76</td> <td>24.019</td> <td>24.019</td> <td>24.019</td> </tr> <tr> <td>0.95</td> <td>24.019</td> <td>24.019</td> <td>24.019</td> </tr> <tr> <td>1.14</td> <td>24.015</td> <td>24.019</td> <td>24.019</td> </tr> <tr> <td>1.52</td> <td>24.014</td> <td>24.016</td> <td>24.018</td> </tr> <tr> <td>1.90</td> <td>24.013</td> <td>24.014</td> <td>24.015</td> </tr> <tr> <td>2.09</td> <td>24.014</td> <td>24.015</td> <td>24.014</td> </tr> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	24.020	24.021	24.021	0.19	24.020	24.020	24.020	0.38	24.019	24.019	24.019	0.57	24.019	24.019	24.019	0.76	24.019	24.019	24.019	0.95	24.019	24.019	24.019	1.14	24.015	24.019	24.019	1.52	24.014	24.016	24.018	1.90	24.013	24.014	24.015	2.09	24.014	24.015	24.014	--	--	--	--
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	24.020	24.021	24.021																																																			
0.19	24.020	24.020	24.020																																																			
0.38	24.019	24.019	24.019																																																			
0.57	24.019	24.019	24.019																																																			
0.76	24.019	24.019	24.019																																																			
0.95	24.019	24.019	24.019																																																			
1.14	24.015	24.019	24.019																																																			
1.52	24.014	24.016	24.018																																																			
1.90	24.013	24.014	24.015																																																			
2.09	24.014	24.015	24.014																																																			
--	--	--	--																																																			
Note:	Slanted line shows the range of the rated load current.																																																					
Item	Ripple-Noise	Temperature	25°C																																																			
Object	+24V1.9A	Testing Circuitry	Figure B																																																			
1. Graph	<p>Input Voltage 230V        Load 100%</p> 																																																					

**COSEL**

Model	TEPS45F24	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+24V1.9A		

Input Volt. 230 V

Cycle 1000 ms

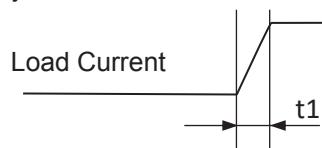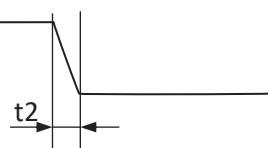Response.  $t_1=t_2=50\mu s$ . Typ

Load 0%(0A)  $\longleftrightarrow$   
Load 100%(1.9A)

200[mV/div]

1[ms/div]

10[ms/div]

Load 50%(0.95A)  $\longleftrightarrow$   
Load 100%(1.9A)

200[mV/div]

1[ms/div]

10[ms/div]

Load 0%(0A)  $\longleftrightarrow$   
Load 50%(0.95A)

200[mV/div]

1[ms/div]


10[ms/div]

**COSEL**

Model	TEPS45F24
Item	Rise and Fall Time
Object	+24V1.9A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

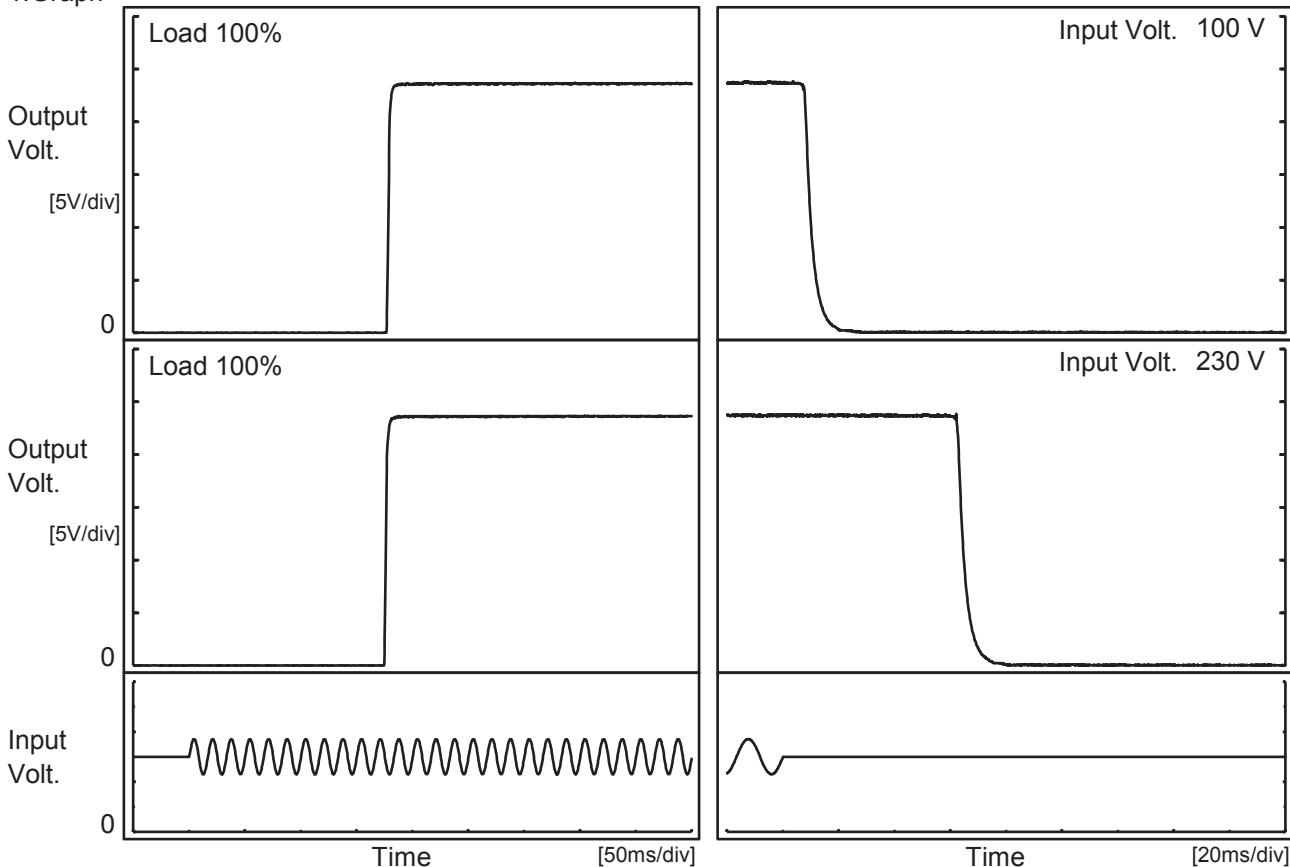

## 2. Values

Input Volt.	Time	Td	Tr	Ts	Th	Tf	[ms]
100 V		177.5	4.0	181.5	7.8	6.4	
230 V		175.3	4.3	179.5	62.5	6.4	

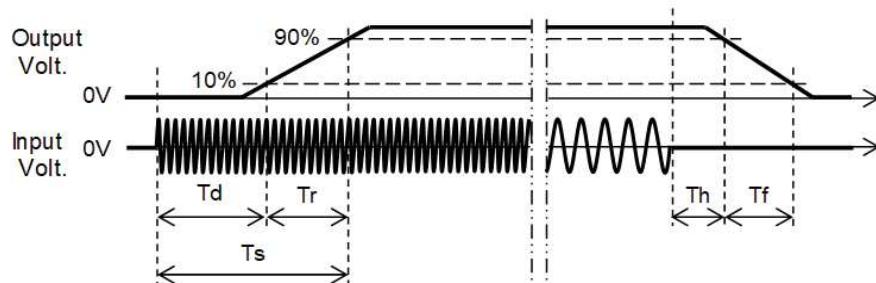


**COSEL**

Model	TEPS45F24
Item	Hold-Up Time
Object	+24V1.9A

 Temperature 25°C  
 Testing Circuitry Figure A

## 1.Graph

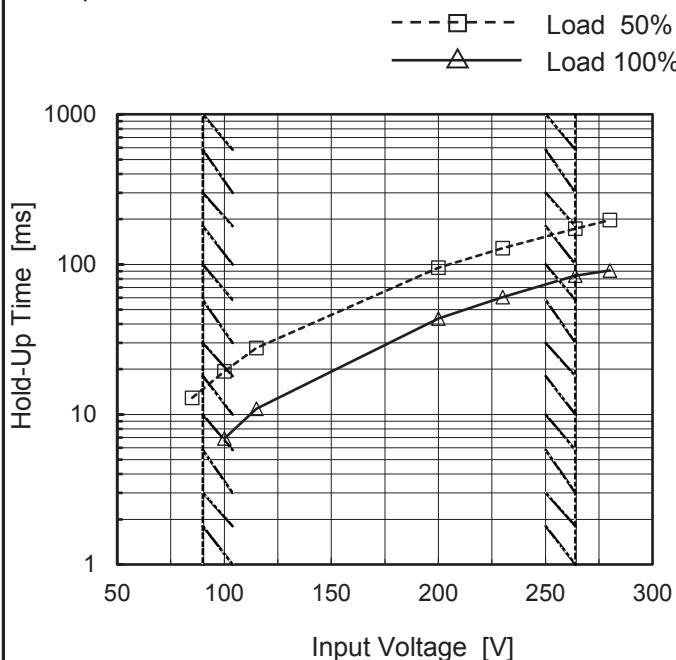

## 2.Values

Input Voltage [V]	Hold-Up Time [ms]	
	Load 50%	Load 100%
85	13	-
100	19	7
115	28	11
200	95	44
230	128	60
264	173	84
280	197	91
--	-	-
--	-	-

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.  
 Note: Slanted line shows the range of the rated input voltage.

**COSEL**


Model	TEPS45F24	Temperature	25°C																																																			
Item	Instantaneous Interruption Compensation	Testing Circuitry	Figure A																																																			
Object	+24V1.9A																																																					
1.Graph	<p>Graph showing Instantaneous Compensation Time [ms] vs Load Current [A]. The Y-axis is logarithmic from 1 to 1000 ms. The X-axis is linear from 0.0 to 2.0 A. Three curves are shown for Input Volt. 100V (solid line with open triangles), Input Volt. 200V (dashed line with open squares), and Input Volt. 230V (dash-dot line with open circles). A slanted line indicates the rated load current range.</p>																																																					
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [ms]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>0.19</td> <td>113</td> <td>494</td> <td>655</td> </tr> <tr> <td>0.38</td> <td>54</td> <td>243</td> <td>326</td> </tr> <tr> <td>0.57</td> <td>35</td> <td>159</td> <td>215</td> </tr> <tr> <td>0.76</td> <td>25</td> <td>114</td> <td>160</td> </tr> <tr> <td>0.95</td> <td>19</td> <td>94</td> <td>119</td> </tr> <tr> <td>1.14</td> <td>15</td> <td>77</td> <td>103</td> </tr> <tr> <td>1.52</td> <td>10</td> <td>55</td> <td>76</td> </tr> <tr> <td>1.90</td> <td>6</td> <td>43</td> <td>60</td> </tr> <tr> <td>2.09</td> <td>5</td> <td>37</td> <td>54</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>			Load Current [A]	Time [ms]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	-	-	-	0.19	113	494	655	0.38	54	243	326	0.57	35	159	215	0.76	25	114	160	0.95	19	94	119	1.14	15	77	103	1.52	10	55	76	1.90	6	43	60	2.09	5	37	54	--	-	-	-
Load Current [A]	Time [ms]																																																					
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																			
0.00	-	-	-																																																			
0.19	113	494	655																																																			
0.38	54	243	326																																																			
0.57	35	159	215																																																			
0.76	25	114	160																																																			
0.95	19	94	119																																																			
1.14	15	77	103																																																			
1.52	10	55	76																																																			
1.90	6	43	60																																																			
2.09	5	37	54																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

**COSEL**

Model	TEPS45F24
Item	Overcurrent Protection
Object	+24V1.9A

 Temperature 25°C  
 Testing Circuitry Figure A

## 1. Graph

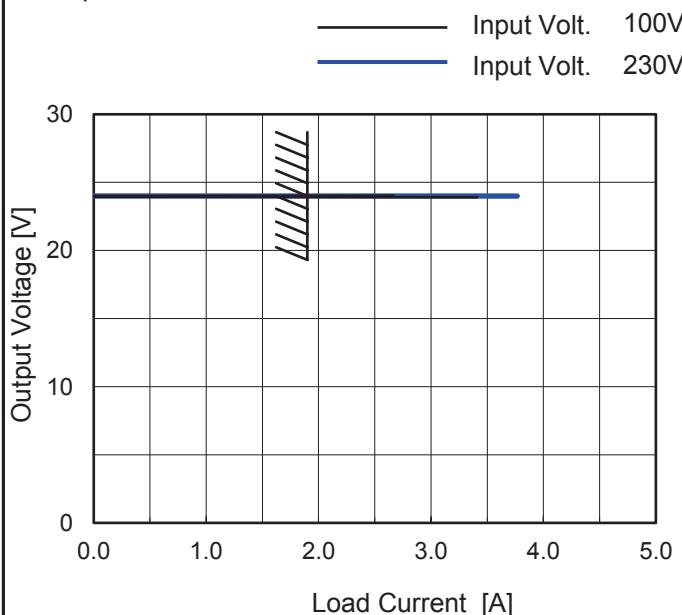

Note: Slanted line shows the range of the rated load current.

Overcurrent protection is Hiccup mode.

## 2. Values

Output Voltage [V]	Load Current [A]	
	Input Volt. 100[V]	Input Volt. 230[V]
24.0	2.67	3.77
22.8	-	-
21.6	-	-
19.2	-	-
16.8	-	-
14.4	-	-
12.0	-	-
9.6	-	-
7.2	-	-
4.8	-	-
2.4	-	-
0.0	-	-



Model	TEPS45F24	Testing Circuitry Figure A
Item	Ambient Temperature Drift	
Object	+24V1.9A	

## 1.Values

Load 100%

Ambient Temperature[°C]	Output Voltage [V]		
	Input Volt. 100V	Input Volt. 200V	Input Volt. 230V
-10	24.023	24.025	24.026
25	24.015	24.017	24.018
50	24.006	24.008	24.009

Item	Minimum Input Voltage for Regulated Output Voltage	Testing Circuitry Figure A
Object	+24V1.9A	

## 1.Values

Ambient Temperature[°C]	Input Voltage [V]	
	Load 50%	Load 100%
-10	61	61
25	61	61
50	61	61

Item	Overvoltage Protection	Testing Circuitry Figure A
Object	+24V1.9A	

## 1.Values

Load 0%

Ambient Temperature[°C]	Operating Point [V]	
	Input Volt. 100V	Input Volt. 230V
-10	29.26	29.26
25	29.28	29.28
50	29.28	29.28

COSEL

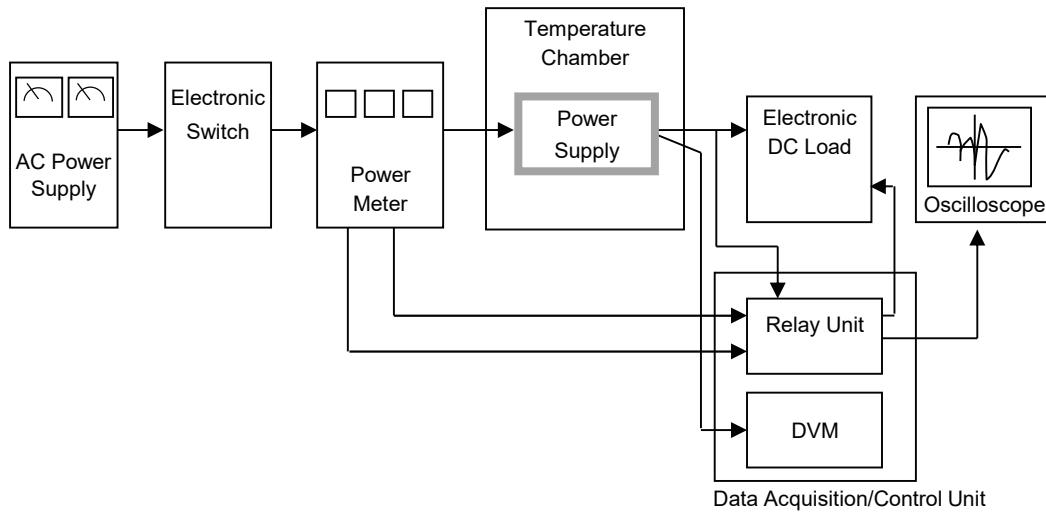


Figure A

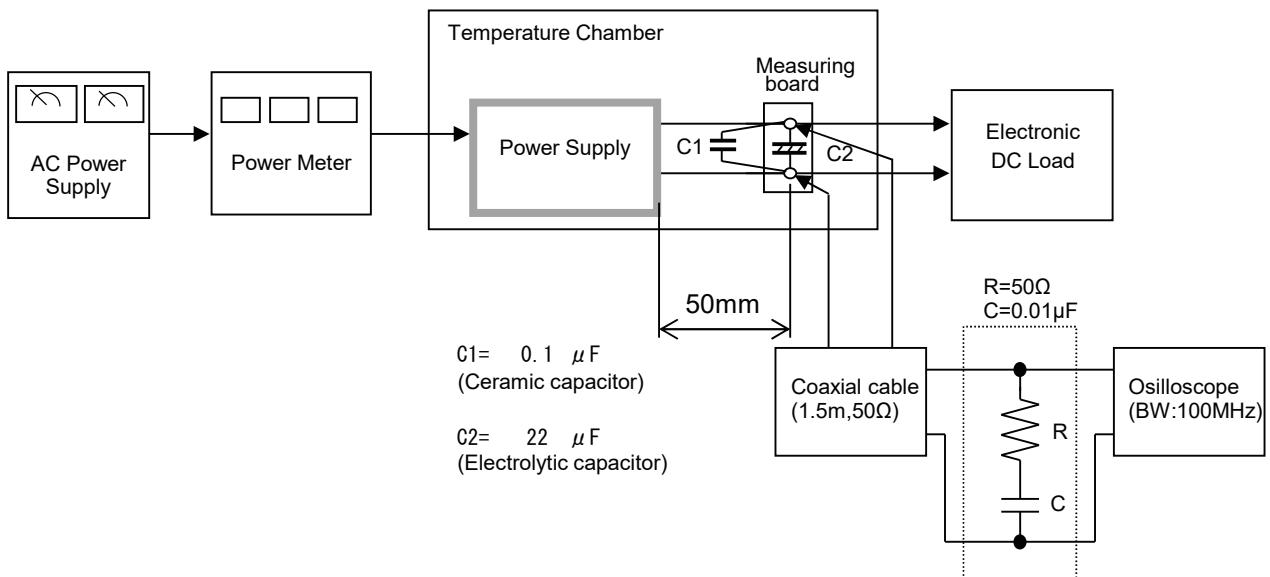


Figure B

**COSEL**

