



PBW50F EMI/EMS Test result

July 4, 2005
Design engineering dep.

Approved : *K. Inagawa*


Prepared : *Reisuke Yoshizawa*

No.	Test item	Conditions	Conditions of Acceptability	Result
1	Line conduction	(1) Rated input(AC100V,120V,230V) (2) Rated load (3) Ambient temp. 25±10°C	(1)Meets the undermentioned standard. FCC Part15 classB , VCCI classB CISPR22 classB , EN55022-B, EN55011-B	OK
2	Radiated emission	(1) Rated input(AC100V,120V,230V) (2) Rated load (3) Ambient temp. 25±10°C	(1)Meets the undermentioned standard. FCC Part15 classB , VCCI classB CISPR22 classB , EN55022-B, EN55011-B	OK
3	Harmonic current (EN61000-3-2)	(1) Rated input (AC100V,230V) (2) Load 0 - Rated load (3) Ambient temp. 25±10°C	(1)Meets the undermentioned standard. EN61000-3-2 classA	OK
4	Static electricity immunity test (EN61000-4-2)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4) Contact discharge voltage 8[kV] (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
5	Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4)Testing field strength 10[V/m] (Level 3)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
6	Electrical fast transient/ burst immunity test (EN61000-4-4)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4) Test peak voltage 4[kV] (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
7	Surge immunity test (EN61000-4-5)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4) Test voltage Line to line 2[kV] (Level 3) Line to earth 4[kV] (Level 4)	(1)The power supply is not stop (2)Circuit does not malfunction. (3)No abnormality of the insulation destruction etc. (4)Parts are no damaged.	OK
8	Immunity to conducted disturbances, induced by radio-frequency fields (EN61000-4-6)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4) Voltage level (e.m.f.) 10[V] (Level 3)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
9	Power frequency magnetic field immunity test (EN61000-4-8)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. 25±10°C (4) Magnetic field 30A/m (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
10	Voltage dips, short interruptions and voltage variations immunity test (EN61000-4-11)	(1) Rated input (AC230V) - 30% reduction at 10mS min. - 60% reduction at 100mS min - 95% reduction at 5S min. - ±10% variation at 15 minutes (2) Rated load (3) Ambient temp. 25±10°C	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK

DATA SHEET		Date	09-Mar-05
Model	PBW50F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	N.Kawataka

LINE CONDUCTION


Model Name : PBW50F-12 Temp. : 25degreeC
 Model No. : Humi. : 45 %
 Serial No. : Date : 2005/3/9 10:46
 Points : 6 Test Equip. : R3132,ESPC
 Detector : PEAK/QP/Ave. Load Line : 150 mm
 Line Mode : VA/VB Comment :
 Power Supply : AC 230V 50Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

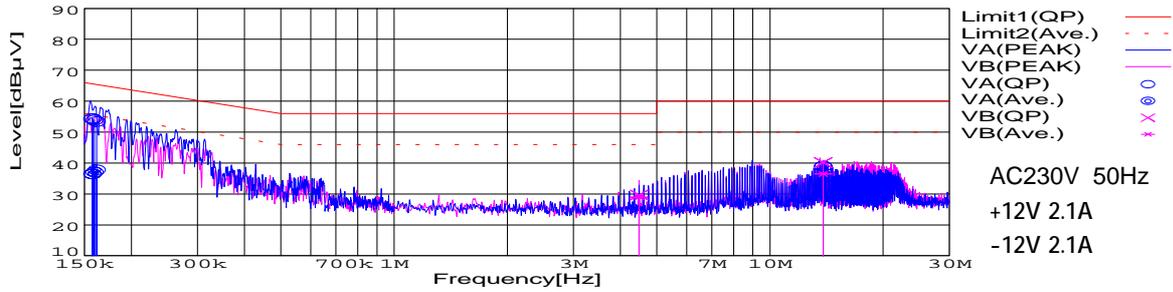

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1579	26.5	44.3	10	36.5	54.3	VA	55.6	65.6	19.1	11.3
0.1618	27.8	43.4	10	37.8	53.4	VA	55.4	65.4	17.6	12
0.1598	27.1	43.9	10	37.1	53.9	VA	55.5	65.5	18.4	11.6
13.8516	24.5	28.2	10.7	35.2	38.9	VA	50	60	14.8	21.1
4.4855	18.6	19.4	10.3	28.9	29.7	VB	46	56	17.1	26.3
13.8527	25.7	29.4	10.7	36.4	40.1	VB	50	60	13.6	19.9

RADIATED EMISSION

Model Name : PBW50F-12 Temp. : 25 degreeC
 Model No. : Humi. : 45 %
 Serial No. : Date : 2005/3/23 15:32
 Points : 5 Test Equip. : R3132,ESPC
 Detector : PEAK/QP Load Line : 150 mm
 Polarization : Hori. & Vert. Comment :
 Power Supply : AC 230V 50Hz
 Limit: [EN 55022] Class B<3m>

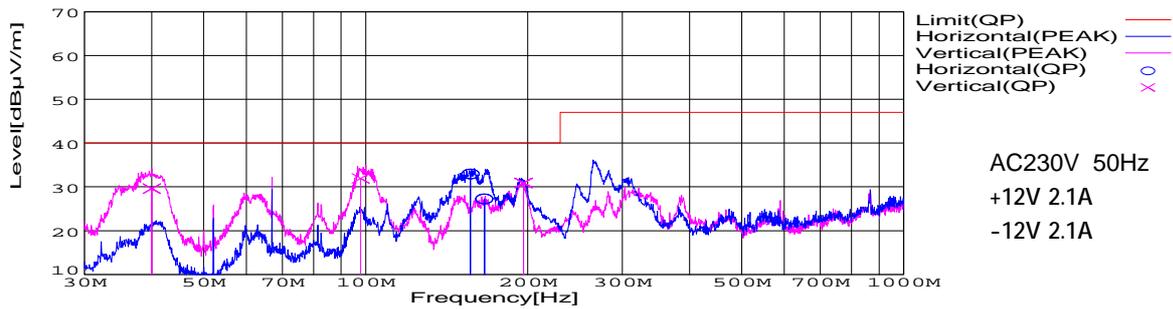

Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
156.501	47.2	BL	10	-24.3	32.9	266	147	Hori.	40	7.1
166.256	42.5	BL	8.8	-24	27.3	102	160	Hori.	40	12.7
40.004	43	BL	12.6	-26	29.6	211	101	Vert.	40	10.4
97.818	47.9	BL	9.1	-25.1	31.9	279	131	Vert.	40	8.1
196.548	49.7	BL	8.3	-27.1	30.9	150	126	Vert.	40	9.1