



DATA SHEET		Date	28-Jun-10
Model	PMA100F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

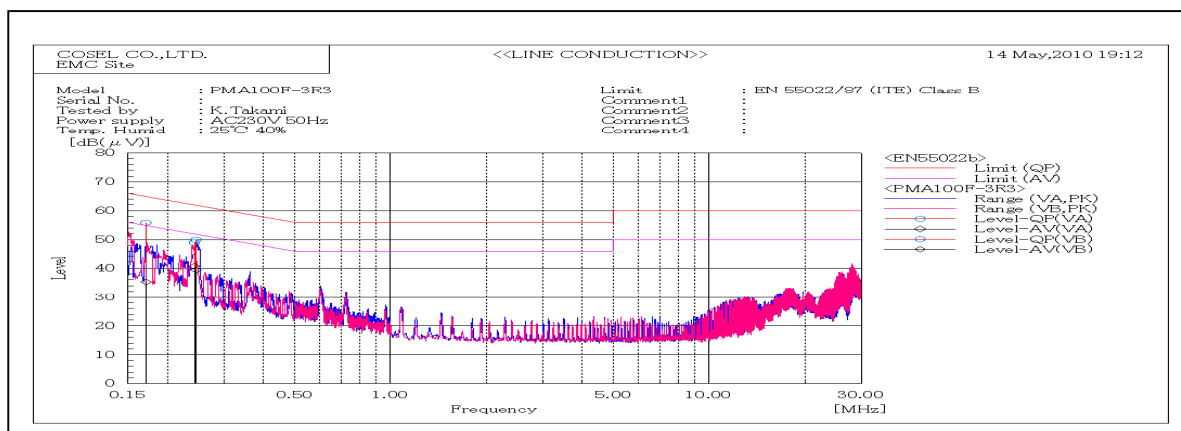

Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.2452		VA	39.9	29.3	10.1	50	39.4	61.9	51.9	11.9	12.5	Pass	
0.17091		VB	45.7	25.1	10.2	55.9	35.3	64.9	54.9	9	19.6	Pass	
0.24245		VB	38.9	30.5	10.1	49	40.6	62	52	13	11.4	Pass	

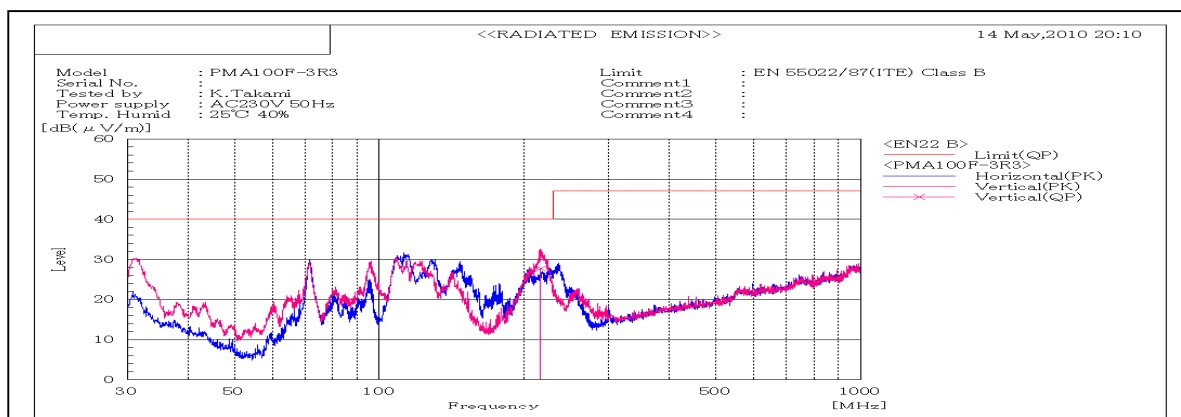


Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	QP					
216.268	V	Stable	49.4	-21.6		27.8	40	12.2	Pass	101	111	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction

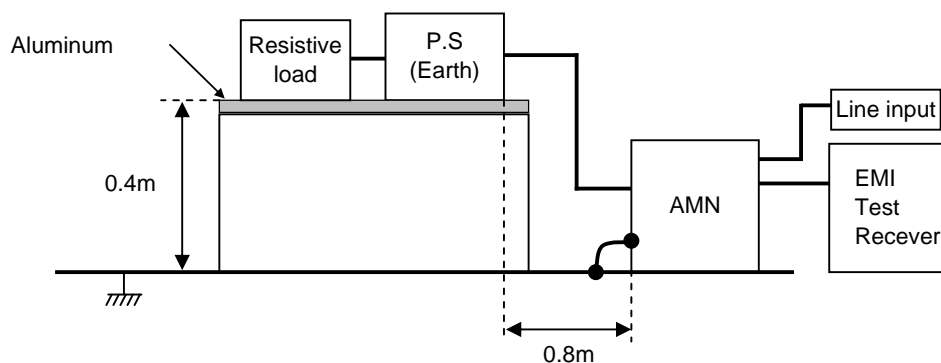

### 2. Radiated emission

