



DATA SHEET		Date	28-Jun-10
Model	PMA30F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

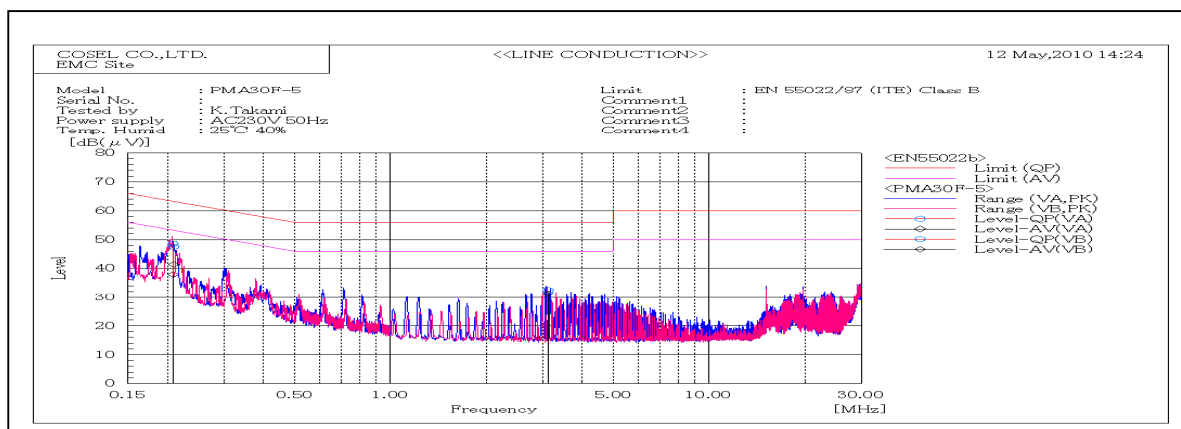

Frequency MHz	Harm	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.2076		VB	38.5	27.8	10.1	48.6	37.9	63.3	53.3	14.7	15.4	Pass	
0.20912		VA	37.5	31.1	10.1	47.6	41.2	63.2	53.2	15.6	12	Pass	
3.12571		VB	22.3	21	10.2	32.5	31.2	56	46	23.5	14.8	Pass	

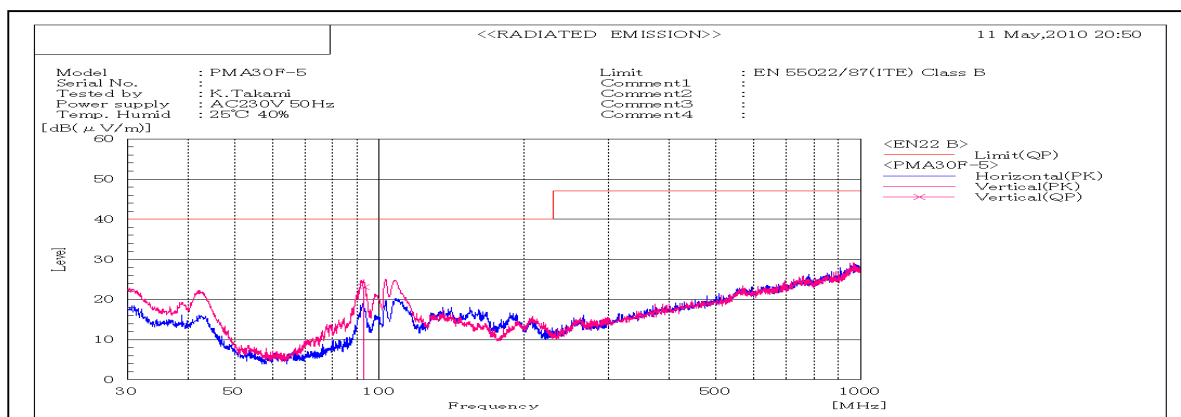

Frequency MHz	Polarization	Stability	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	QP					
93.01	V	Stable	45.5	-22.4		23.1	40	16.9	Pass	158	290	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

