



DATA SHEET		Date	28-Jun-10
Model	PMA60F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

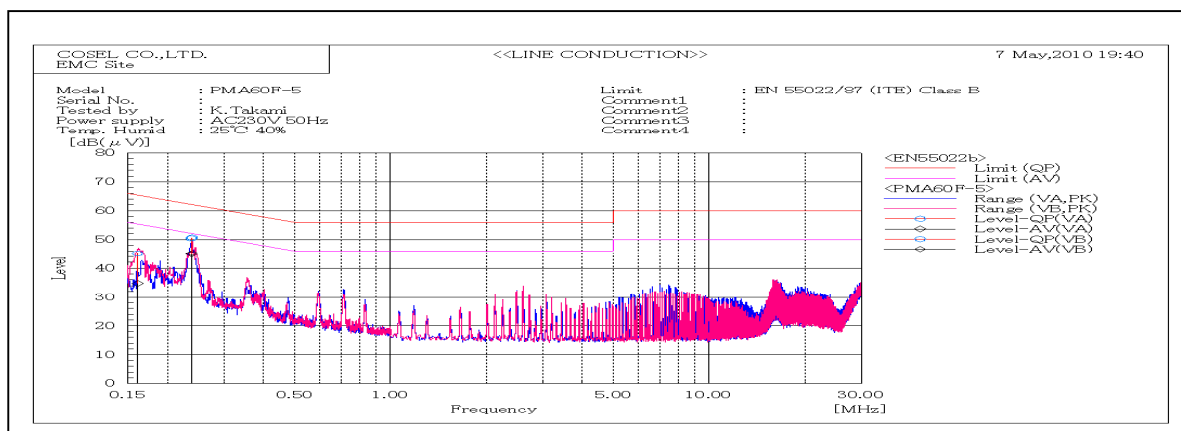

Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.16082		VB	34.8	24.7	10.2	45	34.9	65.4	55.4	20.4	20.5	Pass	
0.23727		VB	40.3	34.7	10.1	50.4	44.8	62.2	52.2	11.8	7.4	Pass	
0.23867		VA	40.6	35.1	10.1	50.7	45.2	62.1	52.1	11.4	6.9	Pass	

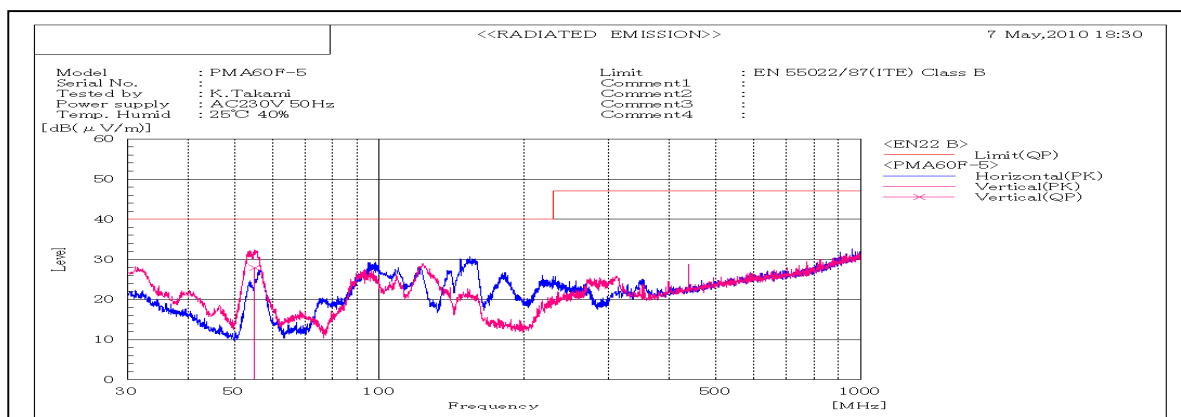

Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP			QP	QP	QP				
55.06	V		49.6		-21.7	27.9	40	12.1	Pass	101	1	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

