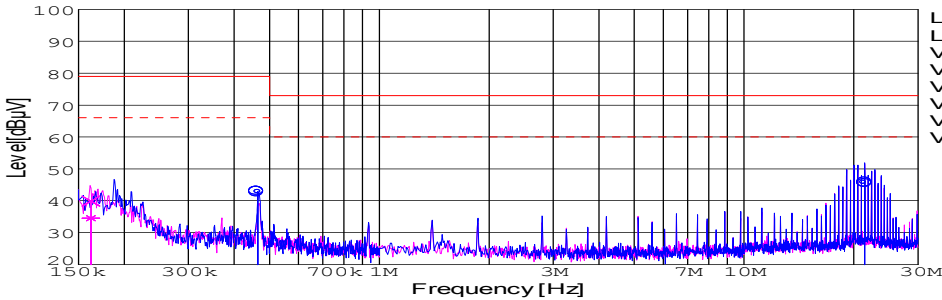
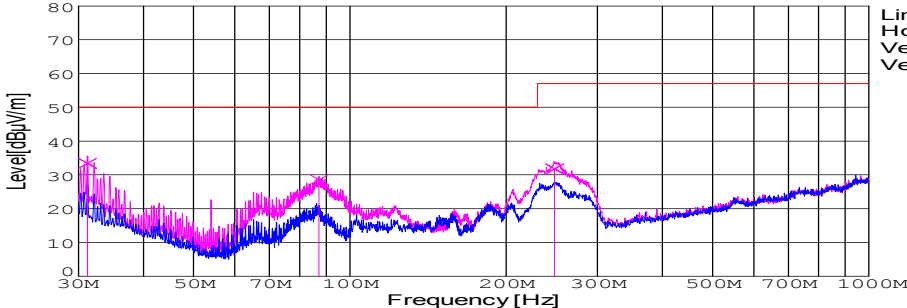


DATA SHEET							Date	04-Oct-07																																														
Model	SFS304815						Temp.	25 degreeC																																														
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH																																														
							Tested by	Y.Miyawaki																																														
LINE CONDUCTION																																																						
Model Name : SFS304815			Temp. : 25degreeC																																																			
Model No. :			Humi. : 45%																																																			
Serial No. :			Date : 2007/10/4 21:19																																																			
Points : 3			Test Equip. : R3132,ESPC																																																			
Detector : PEAK/QP/Ave.			Load Line : 100mm																																																			
Line Mode : VA/VB			Comment : Vo = 15.0V , Io = 2.0A																																																			
Power Supply : DC 48V																																																						
Limit1: [CISPR Pub11] Class A Gr.1(QP)																																																						
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)																																																						
							<div>Limit1(QP)</div> <div>Limit2(Ave.)</div> <div>VA(PEAK)</div> <div>VB(PEAK)</div> <div>VA(QP)</div> <div>VA(Ave.)</div> <div>VB(QP)</div> <div>VB(Ave.)</div>																																															
<table><tr><th>Frequency [MHz]</th><th>Meter Reading (Ave.) [dBuV]</th><th>Meter Reading (QP) [dBuV]</th><th>Factor [dB]</th><th>Level(Ave.) [dBuV]</th><th>Level(QP) [dBuV]</th><th>Line</th><th>Limit(Ave.) [dBuV]</th><th>Limit(QP) [dBuV]</th><th>Margin(Ave.) [dB]</th><th>Margin(QP) [dB]</th></tr><tr><td>0.4645</td><td>33</td><td>32.9</td><td>9.9</td><td>42.9</td><td>42.8</td><td>VA</td><td>66</td><td>79</td><td>23.1</td><td>36.2</td></tr><tr><td>21.4125</td><td>35.4</td><td>35.4</td><td>10.3</td><td>45.7</td><td>45.7</td><td>VA</td><td>60</td><td>73</td><td>14.3</td><td>27.3</td></tr><tr><td>0.162</td><td>24.7</td><td>30.1</td><td>9.8</td><td>34.5</td><td>39.9</td><td>VB</td><td>66</td><td>79</td><td>31.5</td><td>39.1</td></tr></table>											Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]	0.4645	33	32.9	9.9	42.9	42.8	VA	66	79	23.1	36.2	21.4125	35.4	35.4	10.3	45.7	45.7	VA	60	73	14.3	27.3	0.162	24.7	30.1	9.8	34.5	39.9	VB	66	79	31.5	39.1
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]																																												
0.4645	33	32.9	9.9	42.9	42.8	VA	66	79	23.1	36.2																																												
21.4125	35.4	35.4	10.3	45.7	45.7	VA	60	73	14.3	27.3																																												
0.162	24.7	30.1	9.8	34.5	39.9	VB	66	79	31.5	39.1																																												
RADIATED EMISSION																																																						
Model Name : SFS304815			Temp. : 25degreeC																																																			
Model No. :			Humi. : 45%																																																			
Serial No. :			Date : 2007/10/4 21:33																																																			
Points : 3			Test Equip. : R3132,ESPC																																																			
Detector : PEAK/QP			Load Line : 100mm																																																			
Polarization : Vertical			Comment : Vo = 15.0V , Io = 2.0A																																																			
Power Supply : DC 48V																																																						
Limit: [CISPR 11] Class A Group 1<3m>																																																						
							<div>Limit(QP)</div> <div>Horizontal(PEAK)</div> <div>Vertical(PEAK)</div> <div>Vertical(QP)</div>																																															
<table><tr><th>Frequency [MHz]</th><th>MeterReading (QP) [dBuV]</th><th>Ant. Type</th><th>Antenna Factor [dB/m]</th><th>Cable & Preamp [dB]</th><th>Level(QP) [dBuV/m]</th><th>Angle [°]</th><th>Height [cm]</th><th>Polar.</th><th>Limit [dBuV/m]</th><th>Margin [dB]</th></tr><tr><td>31.224</td><td>48.1</td><td>BL</td><td>17.6</td><td>-32.3</td><td>33.4</td><td>96</td><td>104</td><td>Vert.</td><td>50</td><td>16.6</td></tr><tr><td>247.994</td><td>50.8</td><td>BL</td><td>12.1</td><td>-31.1</td><td>31.8</td><td>205</td><td>121</td><td>Vert.</td><td>57</td><td>25.2</td></tr><tr><td>87.158</td><td>52.2</td><td>BL</td><td>8.2</td><td>-31.9</td><td>28.5</td><td>153</td><td>117</td><td>Vert.</td><td>50</td><td>21.5</td></tr></table>											Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	31.224	48.1	BL	17.6	-32.3	33.4	96	104	Vert.	50	16.6	247.994	50.8	BL	12.1	-31.1	31.8	205	121	Vert.	57	25.2	87.158	52.2	BL	8.2	-31.9	28.5	153	117	Vert.	50	21.5
Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]																																												
31.224	48.1	BL	17.6	-32.3	33.4	96	104	Vert.	50	16.6																																												
247.994	50.8	BL	12.1	-31.1	31.8	205	121	Vert.	57	25.2																																												
87.158	52.2	BL	8.2	-31.9	28.5	153	117	Vert.	50	21.5																																												

DATA SHEET		Date	04-Oct-07
Model	SFS304815	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Miyawaki

1.Conditions

(1)Photograph of Test Set-Up


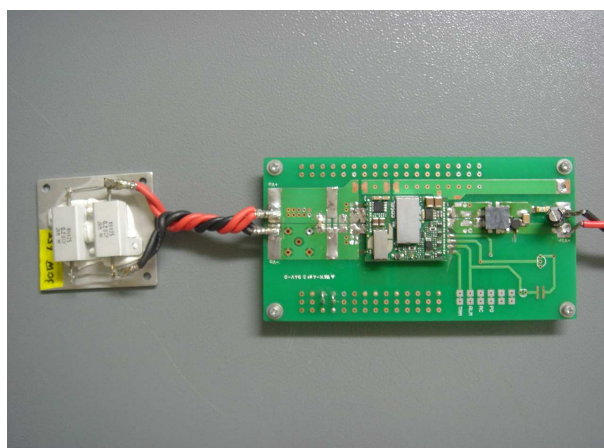


Fig1. Photograph of Test Set-Up

(2)Testing circuitry

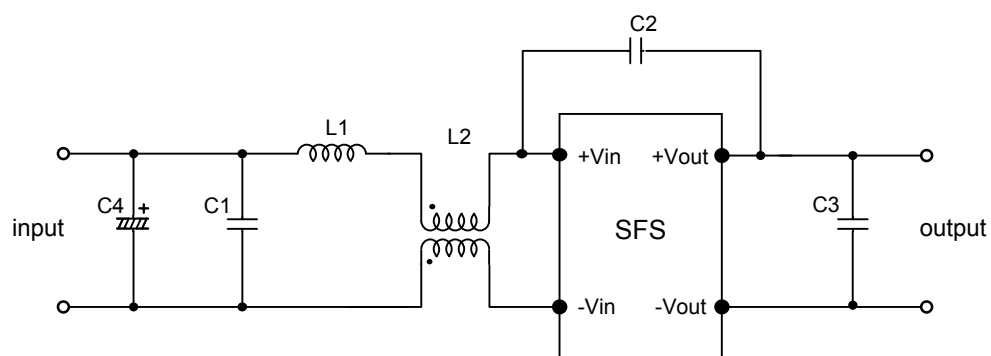


C1: 1 μ F 100V Ceramic capacitor
 C2: 2200pF 630V Ceramic capacitor
 C3: 0.1 μ F 50V Ceramic capacitor
 C4: 22 μ F 100V Electric capacitor

L1: 1 μ H 2.4A Inductor
 L2: ACM1211-102-2PL : TDK

Fig2. Testing circuitry

DATA SHEET		Date	04-Oct-07
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Miyawaki

1. Line conduction

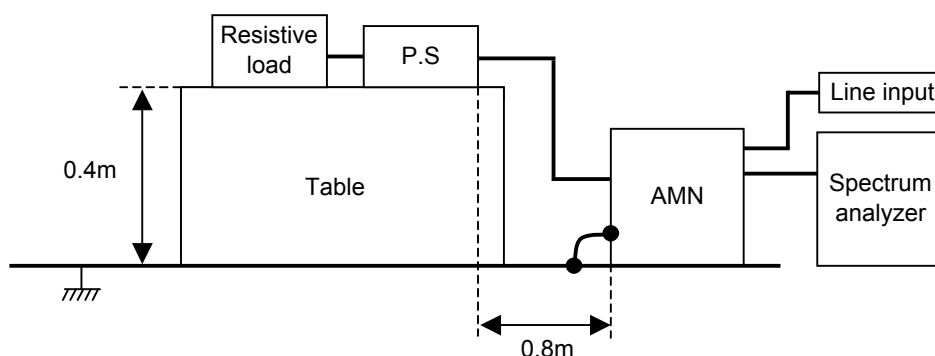

2. Radiated emission

